

PRODUCT CATALOGUE


AV Cables, Adapters, Cable Sleeves, Wall Boxes, Control Boxes,
HDBaseT and HDMI Distribution, Scalers, Converters,
Amplifiers, Conference Cameras, Speakerphones,
Screen and Projector Mounts.





PROFESSIONAL AV SOLUTIONS

Premium accessories for professional AV installations
Everything needed for meeting rooms, hotel
installations, heavy duty installations and more.

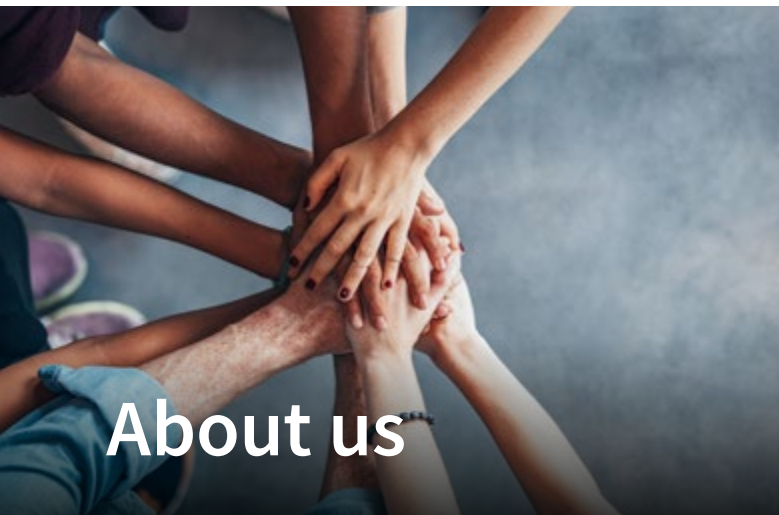

About us

Vivolink was founded with a passion to help the AV installer to a broad assortment of professional AV products and accessories.

Our mission

- We come out of the world of AV installers and understand the everyday need of an AV installer.
- We bring simplicity, fairness & confidence to technology choices.
- We believe that products can always be improved and know that the quality and flexibility of the products are crucial to every professional installer, both during installation and subsequent daily use.

Our products are designed to facilitate an easy installation process even when space is limited. All our products are developed to meet the users' demands for reliability and long-term consistency of their installations every time.

With Vivolink, we want to ensure that our professional customers have the best offering in each of the categories that we operate in.

Premium accessories for professional AV installations

Everything needed for meeting rooms, hotel installations, heavy duty installations and more.

Vivolink has many years of experience and offers professional AV cables & adapters, cable sleeves, wall boxes & panels, control boxes, HDBaseT and HDMI distribution, scalers, converters, amplifiers, conference cameras, speakerphones, active speakers, monitor and projector mounts.



Our responsibility

Our mindset is to provide installation solutions to our customers. We test products and make sure that products fit together as a complete robust end-to-end solution.

We call it **Vivolink Certified Solutions.**

Environment

As an important player in the Pro AV Europe industry, environmental sustainability is extremely important to us. Our commitment to continuously improve our environmental standards is part of our DNA. These efforts are evident when delivering products that contain a quality that ensures long life and thereby reduces electronic waste. All our products comply with European environmental protection laws and regulations, such as RoHS directive.

Sustainable product packaging

We have reduced our product packaging to a minimum, but without compromising the safety of our products during transportation.

- A cable is packed in a simple sealed bag to reduce waste during installation
- Products are packed in recyclable cartons with no use of Styrofoam

Vivolink keeps your system running

If you face any problems with your Vivolink product, we immediately send you a new one. No need to wait for a faulty product to be repaired. This is part of our **Premium Professional Service.**



Contents

Video Cables

- 6** 8K HDMI 2.1 Cables
- 7** 4K HDMI 2.0 Cables
- 10** Accessories for Optical Cables
- 11** 4K HDMI 2.0 Metal Head Cables
- 12** 4K HDMI 2.0 Cables
- 13** Low Smoke Zero Halogen, fire-resistant Cables
- 14** Armoured Cables
- 15** Crosswall Cables
- 16** Cable drums
- 17** HDMI Accessories
- 18** Optical 8K DisplayPort Cables
- 19** DisplayPort Cables
- 20** DisplayPort Adapter Cables
- 22** Combined all-in-one Cables



Audio Cables

- 25** Audio Cables
- 26** Stage Audio Cables
- 28** Low Smoke Zero Halogen Minijack
- 29** Speaker Cables
- 30** RS232 Control Cables



USB Extension & Hubs

- 31** USB 2.0/3.0 Extender Cables
- 33** USB-C to USB-A/B Cables
- 37** USB-C to USB-C Cables
- 41** Keystone Cables
- 43** Cables Adaptors
- 46** Touch Screen Cables
- 48** USB-C Hubs
- 52** USB-C Power Injector
- 55** USB-C KVM Extenders
- 60** USB 3.0 Extender



Video Extenders

- 62** HDMI Extenders
- 71** HDMI/USB-C Wall Plate
- 73** HDMI Extender Dongles
- 74** HDMI Over IP
- 76** HDMI KVM Extenders



Video Scaler & Matrix

- 78** Scaler/Switchers
- 79** USB-C and HDMI Matrix
- 80** HDBaseT Matrix Switcher
- 79** HDMI Matrix Switcher



HDMI Switcher, Splitters & EDID Tools



- 84** HDMI Switcher
- 88** HDMI Video Wall Processor
- 89** HDMI Splitter
- 94** HDBaseT Splitter
- 96** HDMI Signal Management
- 97** HDMI Signal Generator
- 98** Network Serial Port Expander
TCP/IP to RS232/485

Audio products



- 99** Audio Electronics
- 103** Speaker Mounts & Stands
- 106** Speakers

Installation Accessories



- 113** Meetings Made Easy Control Box
- 114** Control Module & Wall Plates
- 118** ePTZ Camera
- 119** Cable Organisers
- 120** Camera and AV Shelves
- 121** Desk Grommets
- 122** Under Desk Cable Organiser
- 123** Cable Sleeves

Desk and Mounts



- 125** Projector Mounts
- 127** Monitor Ceiling Mounts
- 129** Portable Signage Stand
- 130** Flip Mobile Stand
- 131** Mobile Monitor Stands
- 132** Projector Cart
- 133** Table Top Stand
- 134** VESA Soundbar/Camera Mount
- 136** Wall Mounts
- 142** FlexiLift


48Gbit 8K transmission over long distances

8K HDMI 2.1 Optical Cables



Optic HDMI 8K [7.5m-100m]

- HDMI 2.1 8K60Hz, 48Gbps (4K120Hz)
- Ultra high speed HDMI cable
- High Frame Rate (HFR)
- Auto Low Latency Mode (ALLM)
- Enhanced Audio Return Channel (eARC)
- Quick Frame Transport (QFT)
- Quick Media Switching (QMS)
- Variable Refresh Rate (VRR)

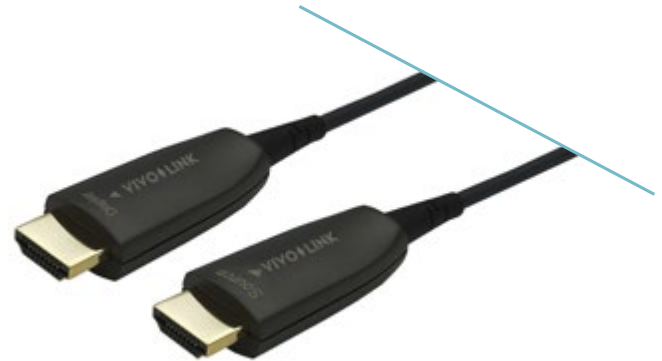


Construction:

- A Grade laser inside ensure long life time of the cable
- Cable built with military standard optical fiber
- EDID return channel via copper wires
- Kevlar filling inside to make the cable extremely strong and robust
- Gold-bladed connector pins for a reliable and perfect contact
- Cable is ultra-flexible: Minimum bend radius: 20mm
- Unlimited number of bends with bend radius down to 20mm
- Working temperature: -20oC to +60oC
- Power consumption: 5m-50m: 250 milliwatt; 60m-100m: 350 milliwatt
- 12 year warranty

			PART NO.
7.5m	HDMI 2.1 support 8K@60Hz	48Gbps, HDR 12bit, HDCP2.2, 3D, slim size of 4.0mm	PROHDMIOP8K7.5
10m	HDMI 2.1 support 8K@60Hz	48Gbps, HDR 12bit, HDCP2.2, 3D, slim size of 4.0mm	PROHDMIOP8K10
15m	HDMI 2.1 support 8K@60Hz	48Gbps, HDR 12bit, HDCP2.2, 3D, slim size of 4.0mm	PROHDMIOP8K15
20m	HDMI 2.1 support 8K@60Hz	48Gbps, HDR 12bit, HDCP2.2, 3D, slim size of 4.0mm	PROHDMIOP8K20
30m	HDMI 2.1 support 8K@60Hz	48Gbps, HDR 12bit, HDCP2.2, 3D, slim size of 4.0mm	PROHDMIOP8K30
40m	HDMI 2.1 support 8K@60Hz	48Gbps, HDR 12bit, HDCP2.2, 3D, slim size of 4.0mm	PROHDMIOP8K40
50m	HDMI 2.1 support 8K@60Hz	48Gbps, HDR 12bit, HDCP2.2, 3D, slim size of 4.0mm	PROHDMIOP8K50
60m	HDMI 2.1 support 8K@60Hz	48Gbps, HDR 12bit, HDCP2.2, 3D, slim size of 4.0mm	PROHDMIOP8K60
70m	HDMI 2.1 support 8K@60Hz	48Gbps, HDR 12bit, HDCP2.2, 3D, slim size of 4.0mm	PROHDMIOP8K70
80m	HDMI 2.1 support 8K@60Hz	48Gbps, HDR 12bit, HDCP2.2, 3D, slim size of 4.0mm	PROHDMIOP8K80
90m	HDMI 2.1 support 8K@60Hz	48Gbps, HDR 12bit, HDCP2.2, 3D, slim size of 4.0mm	PROHDMIOP8K90
100m	HDMI 2.1 support 8K@60Hz	48Gbps, HDR 12bit, HDCP2.2, 3D, slim size of 4.0mm	PROHDMIOP8K100

For more product
info click here

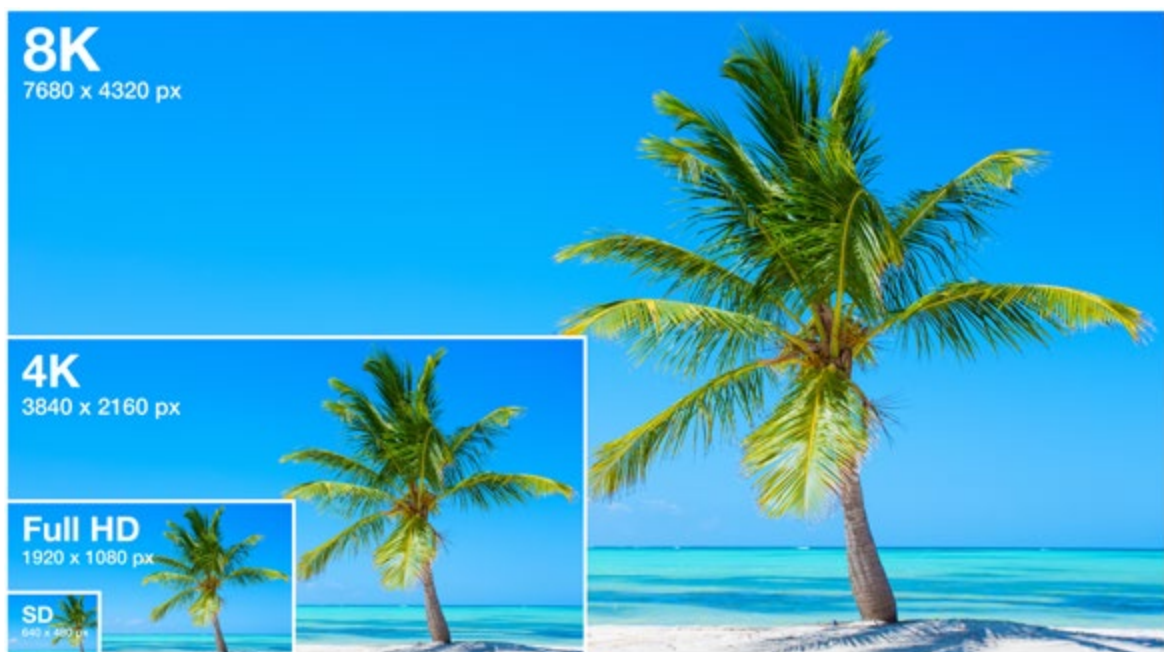

8K HDMI 2.1 Cables



Ultra high-speed cable 48Gbit [0.5m - 7.5m]

- HDMI 2.1 8K60Hz, 48Gbps (4K120Hz)
- Ultra high speed HDMI cable
- High Frame Rate (HFR)
- Auto Low Latency Mode (ALLM)
- Enhanced Audio Return Channel (eARC)
- Quick Frame Transport (QFT)
- Quick Media Switching (QMS)
- Variable Refresh Rate (VRR)



	PART NO.
Pro HDMI 2.1 cable 0.5m, 48Gbps	PROHDMIFUHD0.5
Pro HDMI 2.1 cable 1m, 48Gbps	PROHDMIFUHD1
Pro HDMI 2.1 cable 1.5m, 48Gbps	PROHDMIFUHD1.5
Pro HDMI 2.1 cable 2m, 48Gbps	PROHDMIFUHD2
Pro HDMI 2.1 cable 3m, 48Gbps	PROHDMIFUHD3
Pro HDMI 2.1 cable 5m, 48Gbps	PROHDMIFUHD5
Pro HDMI 2.1 cable 7.5m, 48Gbps	PROHDMIFUHD7.5



For more product info [click here](#)

Inside a full metal shielding of the connector for ultra tight RF shielding and high performance.




4K HDMI 2.0 Cables with lock spike



This high performance HDMI cable with moulded connectors supports advanced 4K connectivity.

- Lock spikes ensure 2kg pull strength
- HDMI 2.0 support
- High speed with Ethernet
- Ultra high resolution up to 4K@60Hz 4:4:4
- 99.9% pure copper cable
- High quality HDMI A connector, 15µm gold in contact area
- Triple shielding in cable and extra shielding in connector
- Supports audio return channel ARC, 3D, HDCP, CEC
- High flexibility ensuring small bending radius

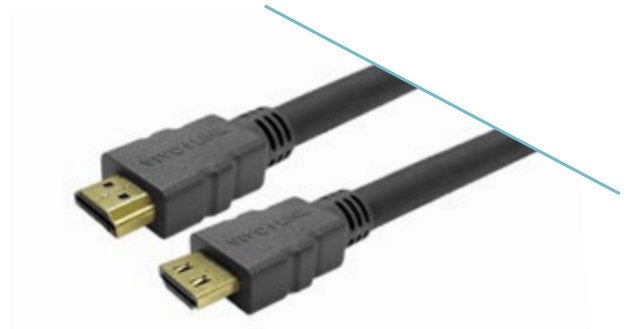

	PART NO.
Pro HDMI w/lock 2.0 4K@60Hz 4:4:4 0.5m	PROHDMIHD0.5L
Pro HDMI w/lock 2.0 4K@60Hz 4:4:4 1m	PROHDMIHD1L
Pro HDMI w/lock 2.0 4K@60Hz 4:4:4 1.5m	PROHDMIHD1.5L
Pro HDMI w/lock 2.0 4K@60Hz 4:4:4 2m	PROHDMIHD2L
Pro HDMI w/lock 2.0 4K@60Hz 4:4:4 3m	PROHDMIHD3L
Pro HDMI w/lock 2.0 4K@60Hz 4:4:4 5m	PROHDMIHD5L
Pro HDMI w/lock 2.0 4K@60Hz 4:4:4 7.5m	PROHDMIHD7.5L



For more product info [click here](#)



Lock spike on connector



18Gbit 4K transmission over long distances

4K HDMI 2.0 Armored Optical Cables

Optic HDMI 4K [20m-100m]

- HDMI 2.0 support
- 4K@60Hz 4:4:4
- Transfer rate: 18Gbps
- HDR (High Dynamic Range) 12bit
- HDCP2.2, 3D
- Slim size cable, only 4.0mm

Construction:

- A Grade laser inside ensure long life time of the cable
- Cable built with military standard optical fiber
- EDID return channel via copper wires
- Kevlar filling inside to make the cable extremely strong and robust
- Locking ring in cable head to ensure that no damage is done when pulling the cable.
- Cable head made of moulded metal
- Gold-bladed connector pins for a reliable and perfect contact
- 12 year warranty
- Cable is ultra-flexible:
- Minimum bend radius: 20mm
- Unlimited number of bends with bend radius down to 20mm
- Tensile Strength (pull resistance) 20kg
- Pressure load on cable 305kg
- Working temperature: -20°C to +60°C
- Power consumption: 5m-50m: 250 milliwatt; 60m-100m: 350 milliwatt

			PART NO.
15m	HDMI 2.0 support 4K@60Hz 4:4:4	18Gbps, HDR 12bit, HDCP2.2, 3D, slim size of 4.0mm	PROHDMIOP15AM
20m	HDMI 2.0 support 4K@60Hz 4:4:4	18Gbps, HDR 12bit, HDCP2.2, 3D, slim size of 4.0mm	PROHDMIOP20AM
30m	HDMI 2.0 support 4K@60Hz 4:4:4	18Gbps, HDR 12bit, HDCP2.2, 3D, slim size of 4.0mm	PROHDMIOP30AM
40m	HDMI 2.0 support 4K@60Hz 4:4:4	18Gbps, HDR 12bit, HDCP2.2, 3D, slim size of 4.0mm	PROHDMIOP40AM
50m	HDMI 2.0 support 4K@60Hz 4:4:4	18Gbps, HDR 12bit, HDCP2.2, 3D, slim size of 4.0mm	PROHDMIOP50AM
70m	HDMI 2.0 support 4K@60Hz 4:4:4	18Gbps, HDR 12bit, HDCP2.2, 3D, slim size of 4.0mm	PROHDMIOP70AM
100m	HDMI 2.0 support 4K@60Hz 4:4:4	18Gbps, HDR 12bit, HDCP2.2, 3D, slim size of 4.0mm	PROHDMIOP100AM



For more product
info [click here](#)



18Gbit 4K transmission over long distances

4K HDMI 2.0 Optical Cables

Optic HDMI 4K [5m-100m]

- HDMI 2.0 support
- 4K@60Hz 4:4:4
- Transfer rate: 18Gbps
- HDR (High Dynamic Range) 12bit
- HDCP2.2, 3D
- Slim size cable, only 4.0mm

Construction:

- A Grade laser inside ensure long life time of the cable
- Cable built with military standard optical fiber
- EDID return channel via copper wires
- Kevlar filling inside to make the cable extremely strong and robust
- Locking ring in cable head to ensure that no damage is done when pulling the cable.
- Cable head made of moulded metal
- Gold-bladed connector pins for a reliable and perfect contact
- 12 year warranty
- Cable is ultra-flexible:
- Minimum bend radius: 20mm
- Unlimited number of bends with bend radius down to 20mm
- Working temperature: -20°C to +60°C
- Power consumption: 5m-50m: 250 milliwatt; 60m-100m: 350 milliwatt

PART NO.			
5m	HDMI 2.0 support 4K@60Hz 4:4:4	18Gbps, HDR 12bit, HDCP2.2, 3D, slim size of 4.0mm	PROHDMIOP5
7.5m	HDMI 2.0 support 4K@60Hz 4:4:4	18Gbps, HDR 12bit, HDCP2.2, 3D, slim size of 4.0mm	PROHDMIOP7.5
10m	HDMI 2.0 support 4K@60Hz 4:4:4	18Gbps, HDR 12bit, HDCP2.2, 3D, slim size of 4.0mm	PROHDMIOP10
15m	HDMI 2.0 support 4K@60Hz 4:4:4	18Gbps, HDR 12bit, HDCP2.2, 3D, slim size of 4.0mm	PROHDMIOP15
20m	HDMI 2.0 support 4K@60Hz 4:4:4	18Gbps, HDR 12bit, HDCP2.2, 3D, slim size of 4.0mm	PROHDMIOP20
30m	HDMI 2.0 support 4K@60Hz 4:4:4	18Gbps, HDR 12bit, HDCP2.2, 3D, slim size of 4.0mm	PROHDMIOP30
40m	HDMI 2.0 support 4K@60Hz 4:4:4	18Gbps, HDR 12bit, HDCP2.2, 3D, slim size of 4.0mm	PROHDMIOP40
50m	HDMI 2.0 support 4K@60Hz 4:4:4	18Gbps, HDR 12bit, HDCP2.2, 3D, slim size of 4.0mm	PROHDMIOP50
70m	HDMI 2.0 support 4K@60Hz 4:4:4	18Gbps, HDR 12bit, HDCP2.2, 3D, slim size of 4.0mm	PROHDMIOP70
100m	HDMI 2.0 support 4K@60Hz 4:4:4	18Gbps, HDR 12bit, HDCP2.2, 3D, slim size of 4.0mm	PROHDMIOP100



For more product
info [click here](#)

Accessories for Optical Cables

Drop cable for meeting desk [2-5m]



HDMI male to HDMI female cable + USB power cable
HDMI female with holes for easy mounting/fixation underneath the tabletop.
USB power injector (optional power for fiber cable).

	PART NO.
Pro HDMI male to female with power 2m	PROHDMIHDMFM2
Pro HDMI male to female with power 3m	PROHDMIHDMFM3
Pro HDMI male to female with power 5m	PROHDMIHDMFM5
 For more product info click here	

Zero Halogen, fire-resistant	PART NO.
Pro HDMI male to female with power 2m	PROHDMIHDMFM2-LSZH
Pro HDMI male to female with power 3m	PROHDMIHDMFM3-LSZH
Pro HDMI male to female with power 5m	PROHDMIHDMFM5-LSZH
 For more product info click here	



Power Injector

Used as supplementary power for HDMI booster or active cables like optical HDMI cables (PROHDMIOP*).

	PART NO.
HDMI power injector	PROHDMIPOWER
 For more product info click here	



4K HDMI 2.0 Metal Head Cables



High performance 4K HDMI [0.5m-20m]


This high performance HDMI cable with metal head connectors supports advanced 4K connectivity.

- HDMI 2.0 support
- High-speed with Ethernet
- Ultra high resolution up to 4K@60Hz 4:4:4
- Transfer rate up to 18Gbps
- 99.9% pure copper cable
- High quality HDMI A connector, 15µm gold in contact area
- Triple shielding in cable and extra shielding in connector
- Supports audio return channel ARC, 3D, HDCP, CEC
- High flexibility ensuring small bending radius



	PART NO.	
Pro HDMI 2.0 cable 0.5m, 18Gbps	PROHDMIHDM0.5	
Pro HDMI 2.0 cable 1m, 18Gbps	PROHDMIHDM1	
Pro HDMI 2.0 cable 1.5m, 18Gbps	PROHDMIHDM1.5	
Pro HDMI 2.0 cable 2m, 18Gbps	PROHDMIHDM2	
Pro HDMI 2.0 cable 3m, 18Gbps	PROHDMIHDM3	
Pro HDMI 2.0 cable 5m, 18Gbps	PROHDMIHDM5	
Pro HDMI 2.0 cable 7.5m, 18Gbps	PROHDMIHDM7.5	
Pro HDMI 2.0 cable 10m, 18Gbps	PROHDMIHDM10	With lock spike
Pro HDMI 2.0 cable 12.5m, 18Gbps	PROHDMIHDM12.5	With lock spike
Pro HDMI cable 15m, 10.2Gbps	PROHDMIHDM15	With lock spike
Pro HDMI cable 20m, 10.2Gbps	PROHDMIHDM20	With lock spike

For more product
info click here



Lock spike on
connector from
10m and up.

4K HDMI 2.0 Cables

High performance 4K HDMI [0.25m-20m]

This high performance HDMI cable with moulded connectors supports advanced 4K connectivity.

	PART NO.	
Pro HDMI 2.0 4K@60Hz 4:4:4 0.25m	PROHDMIHD0.25	
Pro HDMI 2.0 4K@60Hz 4:4:4 0.5m	PROHDMIHD0.5	
Pro HDMI 2.0 4K@60Hz 4:4:4 1m	PROHDMIHD1	
Pro HDMI 2.0 4K@60Hz 4:4:4 1.5m	PROHDMIHD1.5	
Pro HDMI 2.0 4K@60Hz 4:4:4 2m	PROHDMIHD2	
Pro HDMI 2.0 4K@60Hz 4:4:4 3m	PROHDMIHD3	
Pro HDMI 2.0 4K@60Hz 4:4:4 5m	PROHDMIHD5	
Pro HDMI 2.0 4K@60Hz 4:4:4 7.5m	PROHDMIHD7.5	
Pro HDMI 2.0 4K@60Hz 4:4:4 10m	PROHDMIHD10	With lock spike
Pro HDMI 2.0 4K@60Hz 4:4:4 12.5m	PROHDMIHD12.5	With lock spike
Pro HDMI 2.0 4K@60Hz 4:4:4 15m	PROHDMIHD15-18G	With lock spike
Pro HDMI 2.0 4K@60Hz 4:4:4 20m	PROHDMIHD20-18G	With lock spike



For more product info [click here](#)

	PART NO.
Great savings on bulk package	
10 x Pro HDMI 4K@60Hz 4:4:4 1m	PROHDMIHD1-BULK
10 x Pro HDMI 4K@60Hz 4:4:4 2m	PROHDMIHD2-BULK
10 x Pro HDMI 4K@60Hz 4:4:4 3m	PROHDMIHD3-BULK
10 x Pro HDMI 4K@60Hz 4:4:4 5m	PROHDMIHD5-BULK



For more product info [click here](#)

White-line High performance 4K HDMI [0.5-15m]

	PART NO.	
Pro HDMI white 4K@60Hz 4:4:4 0.5m	PROHDMIHD0.5W	
Pro HDMI white 4K@60Hz 4:4:4 1m	PROHDMIHD1W	
Pro HDMI white 4K@60Hz 4:4:4 1.5m	PROHDMIHD1.5W	
Pro HDMI white 4K@60Hz 4:4:4 2m	PROHDMIHD2W	
Pro HDMI white 4K@60Hz 4:4:4 3m	PROHDMIHD3W	
Pro HDMI white 4K@60Hz 4:4:4 5m	PROHDMIHD5W	
Pro HDMI white 4K@60Hz 4:4:4 7.5m	PROHDMIHD7.5W	
Pro HDMI white 4K@60Hz 4:4:4 10m	PROHDMIHD10W	With lock spike
Pro HDMI white 4K@60Hz 4:2:0 15m	PROHDMIHD15W-18G	With lock spike



For more product info [click here](#)



- HDMI 2.0 support
- High speed with Ethernet
- Ultra high resolution up to 4K@60Hz 4:4:4
- 99.9% pure copper cable
- High quality HDMI A connector, 15µm gold in contact area
- Triple shielding in cable and extra shielding in connector
- Supports audio return channel ARC, 3D, HDCP, CEC
- High flexibility ensuring small bending radius




Lock spike on connector from 10m and up.

Slim HDMI [0.5m-7.5m]



This slim HDMI cable is ultra-flexible. It is ideal to use at the meeting table. This is a high performance cable supporting up to 4K@60Hz.

- HDMI 2.0 support
- High speed with Ethernet
- Ultra high resolution up to 4K@60Hz 4:4:4
- Ultra flexible, supporting small bending radius
- Easy for installation under limited or complicated conditions
- High quality type A HDMI connector, 15µm gold in contact area

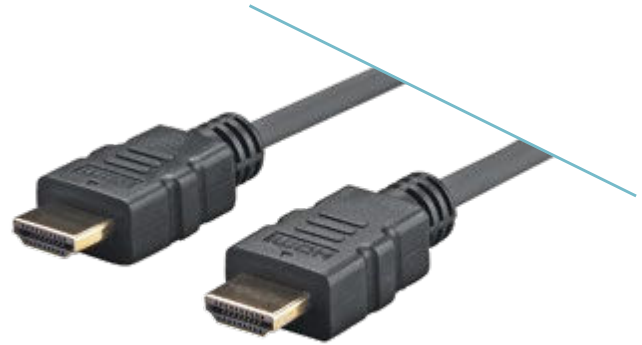

	PART NO.
Pro HDMI slim 0.5m	PROHDMIS0.5
Pro HDMI slim 1m	PROHDMIS1
Pro HDMI slim 1.5m	PROHDMIS1.5
Pro HDMI slim 2m	PROHDMIS2
Pro HDMI slim 3m	PROHDMIS3
Pro HDMI slim 5m	PROHDMIS5
Pro HDMI slim 7.5m (4K 10.2Gbit)	PROHDMIS7.5


[For more product info click here](#)


Low Smoke Zero Halogen, fire-resistant



LSZH (Low Smoke Zero Halogen) HDMI [0.5m-20m]


When health and safety are top priorities in the installation, the right cables are needed. Low Smoke Zero Halogen cabling is the safest choice for any application in which smoke is likely to come into contact with people, since no harmful toxins are actually released.

- HDMI 2.0 support
- High speed with Ethernet
- HDMI supports 4K@60Hz 4:4:4
- HDR
- 99.9% copper conductor
- High quality, gold HDMI A connector 15µm min.
- Triple shielded cable and extra shielding in the connector
- Supports audio return channel (ARC), 3D, HDCP, CEC
- High flexibility ensuring small bending radius
- Fire-resistant LSZH jacket, IEC60332-1

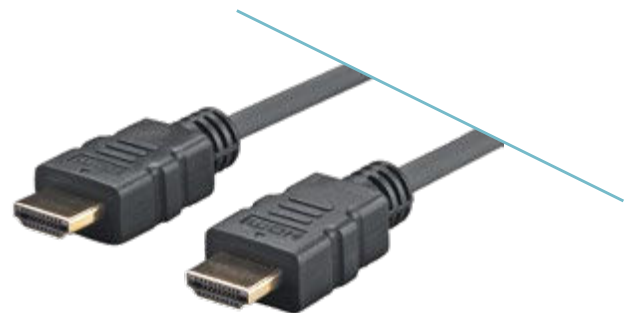

	PART NO.
Pro HDMI LSZH 4K@60Hz 4:4:4, 18Gb/s. 0.5m	PROHDMIHDLSSH0.5
Pro HDMI LSZH 4K@60Hz 4:4:4, 18Gb/s. 1m	PROHDMIHDLSSH1
Pro HDMI LSZH 4K@60Hz 4:4:4, 18Gb/s. 1.5m	PROHDMIHDLSSH1.5
Pro HDMI LSZH 4K@60Hz 4:4:4, 18Gb/s. 2m	PROHDMIHDLSSH2
Pro HDMI LSZH 4K@60Hz 4:4:4, 18Gb/s. 3m	PROHDMIHDLSSH3
Pro HDMI LSZH 4K@60Hz 4:4:4, 18Gb/s. 5m	PROHDMIHDLSSH5
Pro HDMI LSZH 4K@60Hz 4:4:4, 18Gb/s. 7.5m	PROHDMIHDLSSH7.5
Pro HDMI LSZH 4K@60Hz 4:4:4, 18Gb/s. 10m	PROHDMIHDLSSH10
Pro HDMI LSZH 4K@60Hz 4:2:0 10,2Gb/s. 15m	PROHDMIHDLSSH15
Pro HDMI LSZH 4K@60Hz 4:4:4 18Gb/s. 15m	PROHDMIHDLSSH15-18G
Pro HDMI LSZH 4K@60Hz 4:2:0 10.2Gb/s. 20m	PROHDMIHDLSSH20


[For more product info click here](#)

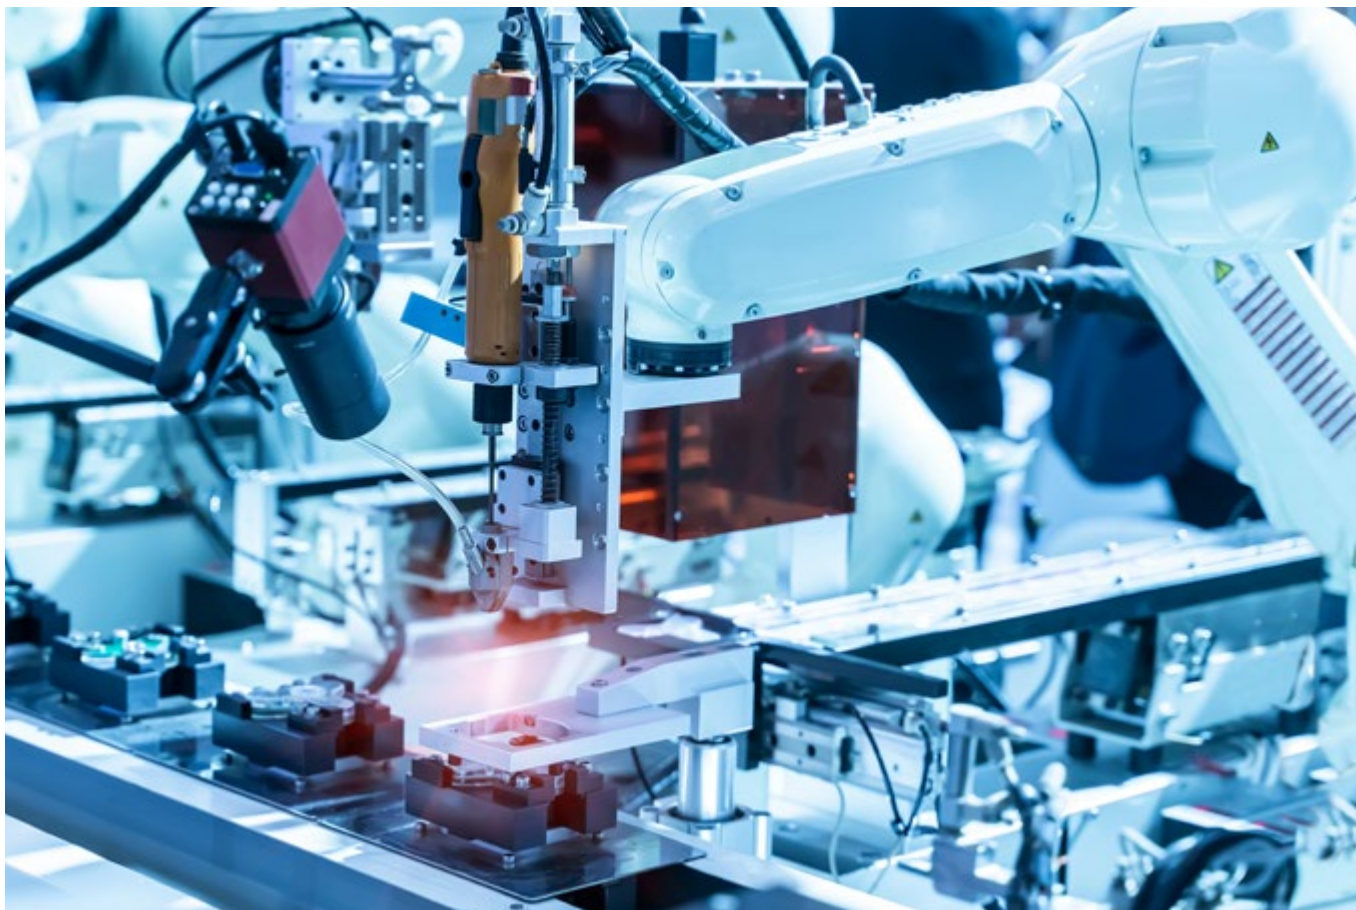

Armoured Cables

4K
 ULTRA HD

 HDMI
 HIGH SPEED
 with ETHERNET


HEAVY DUTY

Vivolink armoured cables are designed specifically for rough environments. The external armouring can withstand high pressure and protects the cable from damage. Furthermore, the cables are humidity-proof, corrosion-proof, and perfect for outdoor installations and applications.

Armoured HDMI [3m-20m]

- HDMI 2.0 support
- High speed with Ethernet
- Supports up to 4K60Hz
- 99.9% copper conductor
- High quality, gold HDMI A connector 15µm min
- Triple shielded cable and extra shielding in the connector
- Supports audio return channel (ARC), 3D, HDCP, CEC
- High flexibility ensuring small bending radius

PART NO.		
Pro HDMI armoured cable 3m	PROHDMIAM3	
Pro HDMI armoured cable 5m	PROHDMIAM5	
Pro HDMI armoured cable 7.5m	PROHDMIAM7.5	
Pro HDMI armoured cable 10m	PROHDMIAM10	With lock spike
Pro HDMI armoured cable 15m	PROHDMIAM15	With lock spike
Pro HDMI armoured cable 20m	PROHDMIAM20	With lock spike

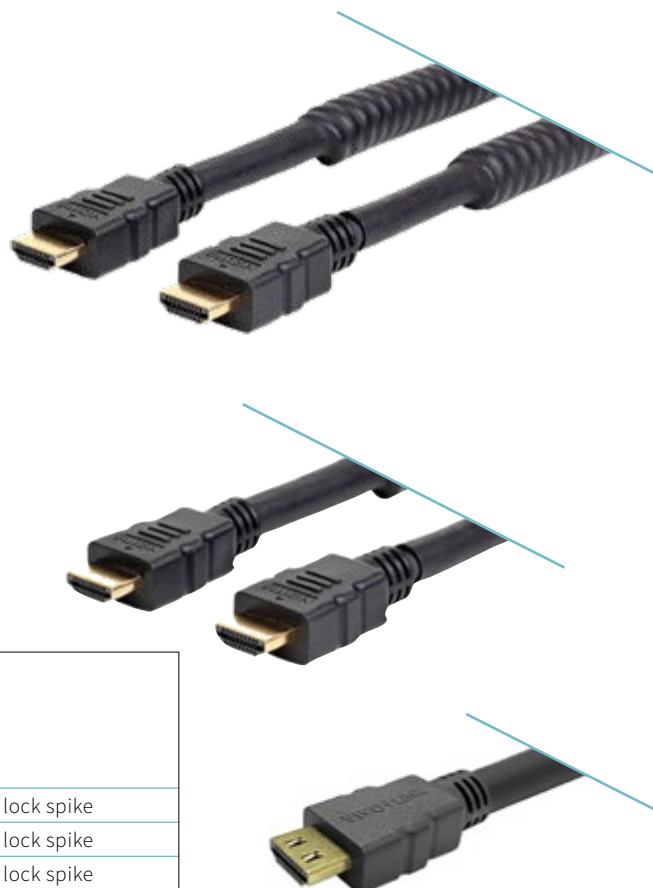
 For more product
 info [click here](#)




Tie a tow to the cable and pull it through a tube or a wall

Crosswall Cables

1080P
FULL HD

Vivolink Crosswall cables are designed specifically to be pulled through tubes and walls. Due to the large size of the cable head, conventional cables are difficult to pull through tubes and walls. It sometimes requires soldering to be done on-site. Crosswall cables are designed to eliminate that problem, and simplify your installations.

Crosswall cables are simple and easy to use - requiring only a 22mm hole. After pulling the long-end cable through the tube or wall - using the specially designed metal head - simply install the round metal female and male connectors, and lock them in place. Fast, easy and ready for use in any environment.

Crosswall HDMI [7.5m-20m]

- Supports high resolutions of up to full HD 1080p
- Triple shielded cable and extra shielding in the connector
- Pure copper conductor
- Supports audio return channel (ARC), 3D, HDCP, CEC
- High flexibility, ensuring small bending radius
- Attach string to easily pull through cable tubes [\[see photo\]](#)



Each cable comes with an attachable head for pulling cable through tube/wall Ø18mm.

	PART NO.
Pro HDMI crosswall cable 7.5m	PROHDMICW7.5
Pro HDMI crosswall cable 10m	PROHDMICW10
Pro HDMI crosswall cable 15m	PROHDMICW15
Pro HDMI crosswall cable 20m	PROHDMICW20
For more product info click here	

Vivolink Armoured Optic HDMI 4K

Cable on Drum – 70m & 100m

Designed for long-distance professional installations, the Vivolink Armoured Optic HDMI Cable on drum delivers uncompromising 4K/60Hz 18Gbps performance. Built with militarygrade optical fiber, Kevlar reinforcement, and copper shielding, it ensures maximum durability for demanding AV environments.

- HDMI 2.0: 4K/60Hz 4:4:4, HDR 12bit, HDCP2.2, 3D & ARC
- Supplied on durable drum in 70m or 100m lengths
- Integrated storage hatch for safely housing one connector inside the reel
- Extreme strength: 20 kg tensile / 305 kg pressure load
- Gold-plated connectors, metal molded head with lock ring
- Ultra-low power consumption: 0.25W
- Minimum bend radius: 20mm

Ideal for: AV rental, live events, broadcast, and fixed installations requiring both reliability and robustness.

	PART NO.
70m Armored HDMI 2.0 fiber cable on a drum	PROHDMIOP70AM-DRUM
100m Armored HDMI 2.0 fiber cable on a drum	PROHDMIOP100AM-DRUM
 For more product info click here	

	PART NO.
100m HDMI 2.0 fiber cable on a drum	PROHDMIOP100-DRUM
 For more product info click here	



4K
ULTRA HD



Universal Protection Cover

– for Cable Connectors

- Protective cap for HDMI and similar-sized cable connectors
- Rugged metal housing for long-lasting durability
- Quick and easy to mount and remove
- Helps maintain connector performance and reliability
- Originally designed for Vivolink cable drums – now sold separately
- Compatible with multiple AV cable types (not limited to HDMI)

	PART NO.
Vivolink Protection cover for cable connector	PROHDMIOP-COVER
 For more product info click here	



4K
ULTRA HD

HDMI
HIGH SPEED
with ETHERNET



HDMI Accessories

HDMI [2m]



	PART NO.
HDMI female to HDMI female 2m	PROHDMIFHDMIF
	For more product info click here

HDMI [0.2m]



	PART NO.
HDMI male to HDMI female 0.2m	4K@60Hz PROHDMIADAPHDMIF
	For more product info click here

Pro HDMI Cable for wall plate

Length 0.15m with mount for wall plate.
High performance Professional AV, 4K.
Ultra flexible.




Wall plate is not included.

	PART NO.
Pro HDMI cable F-F 0.15m	PROHDMIHDFFWP
	For more product info click here

Active HDMI Booster Chip



Simple plug and play booster, no power supply needed. It supports up to 4K@60Hz depending on the cable length. Re-shape and re-clock deteriorated signal.

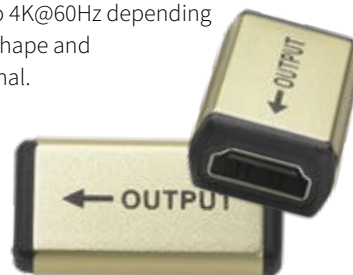

	PART NO.
Pro HDMI booster	VLHDMIAMP
	For more product info click here



Optical 8K DisplayPort Cables



Vivolink's Optical DisplayPort 1.4 for ultra high resolution supporting 8K@60Hz resolution from 10m-100m. Its enhanced flexibility ensures a small bending radius. Vivolink optical DisplayPort cable is a perfect match for ultra high resolution projectors for long distance applications.

- Ultra high resolution of 8K@60Hz
- Cable built with military standard optical fiber
- Optic fiber covered with copper wires
- Kevlar filling inside makes the cable extremely strong and robust
- Lock ring in cable head secure no damage by pulling in cable.

- Connector pins are gold bladed for a reliable and perfect contact
- The optical fiber converter is extremely high quality chip set
- 12 year warranty
- Cable is ultra-flexible
- Minimum bend radius: 20mm
- Unlimited number of bends with bend radius down to 20mm
- Working temperature: -20°C ~ +60°C
- Mechanical lock incorporated in the connector prevents connection loss

DisplayPort to DisplayPort [10m-100m]

		PART NO.
10m	DisplayPort 1.4 support 8K/60Hz	PRODPOP10
15m	DisplayPort 1.4 support 8K/60Hz	PRODPOP15
20m	DisplayPort 1.4 support 8K/60Hz	PRODPOP20
30m	DisplayPort 1.4 support 8K/60Hz	PRODPOP30
40m	DisplayPort 1.4 support 8K/60Hz	PRODPOP40
50m	DisplayPort 1.4 support 8K/60Hz	PRODPOP50
70m	DisplayPort 1.4 support 8K/60Hz	PRODPOP70
80m	DisplayPort 1.4 support 8K/60Hz	PRODPOP80
100m	DisplayPort 1.4 support 8K/60Hz	PRODPOP100



For more product info [click here](#)



DisplayPort Cables



Vivolink's DisplayPort cables are heavy-duty, supporting 4K resolution from 0.5m-30m. Its enhanced flexibility ensures a small bending radius. Vivolink DisplayPort cables offer both technical and physical advantages, especially in long distance applications.

DisplayPort to DisplayPort [0.5m-30m]

- Ultra high resolution of 4K@60Hz
- 99.9% copper conductor
- Displayport ver. 1.2
- High quality type A connector with lock, 15µm gold min. in contact area
- Triple shielding in cable and extra shielding in connector
- Mechanical lock incorporated in the connector prevents connection loss
- High flexibility ensuring small bending radius



	PART NO.
Pro DisplayPort cable 0.5m	PRODP0.5
Pro DisplayPort cable 1m	PRODP1
Pro DisplayPort cable 1.5m	PRODP1.5
Pro DisplayPort cable 2m	PRODP2
Pro DisplayPort cable 3m	PRODP3
Pro DisplayPort cable 5m	PRODP5
 For more product info click here	

	PART NO.
Pro DisplayPort cable 7.5m	PRODP7.5
Pro DisplayPort cable 10m	PRODP10
Pro DisplayPort cable 15m	PRODP15
Pro DisplayPort cable 20m	PRODP20
Pro DisplayPort cable 25m	PRODP25
Pro DisplayPort cable 30m	PRODP30
 For more product info click here	





DisplayPort Adapter Cables

DisplayPort [0.2m]



PART NO.		
DP male to HDMI female	1920x1080@60Hz	PRODPADAPHDMI
DP male to HDMI female 4K	3840 x 2160 @60Hz	PRODPADAPHDMI4K
		For more product info click here



PART NO.		
DP male to DVI female	1920x1080@60Hz	PRODPADAPDVI
		For more product info click here

Optic DisplayPort to 4K HDMI [20m-50m]

Supporting 4K@60Hz in 4:4:4. This cable is designed to connect a DisplayPort video source to an HDMI display. It is a high performance cable with a metal housing connector at each end.

PART NO.	
Pro Displayport to HDMI 4K optic 20m	PRODPHDMIOP20
Pro Displayport to HDMI 4K optic 30m	PRODPHDMIOP30
Pro Displayport to HDMI 4K optic 40m	PRODPHDMIOP40
Pro Displayport to HDMI 4K optic 50m	PRODPHDMIOP50
For more product info click here	




DisplayPort to HDMI [0.5m-20m]

This cable is designed to connect a DisplayPort video source to an HDMI display. It is a high performance cable with a moulded connector at each end.

- High resolution, up to full HD (1920x1080P@60Hz)
- 99.9% copper conductor
- High quality type A DisplayPort connector with lock, 15µm gold min. in contact area
- Triple shielding in cable and extra shielding in connector
- The mechanical lock incorporated in the DisplayPort connector effectively prevents connection loss
- High flexibility ensuring small bending radius

	PART NO.
Pro DisplayPort - HDMI 0.5m	PRODPHDMI0.5
Pro DisplayPort - HDMI 1m	PRODPHDMI1
Pro DisplayPort - HDMI 1.5m	PRODPHDMI1.5


[For more product info click here](#)

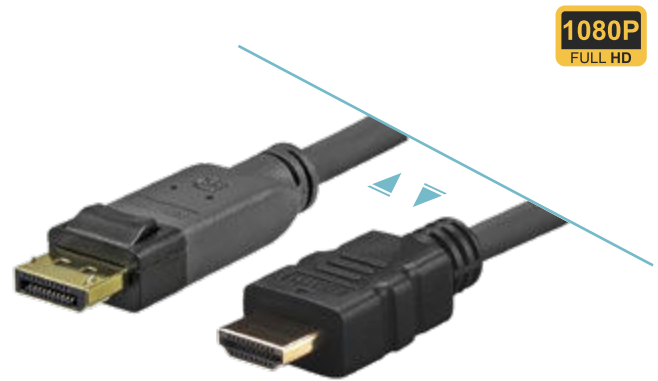

Pro DisplayPort - HDMI 2m	PRODPHDMI2
Pro DisplayPort - HDMI 3m	PRODPHDMI3
Pro DisplayPort - HDMI 5m	PRODPHDMI5
Pro DisplayPort - HDMI 7.5m	PRODPHDMI7.5
Pro DisplayPort - HDMI 10m	PRODPHDMI10
Pro DisplayPort - HDMI 15m	PRODPHDMI15
Pro DisplayPort - HDMI 20m	PRODPHDMI20


[For more product info click here](#)

DisplayPort to 4K HDMI [1m-15m]

Supporting 4K@60Hz in 4:4:4. This cable is designed to connect a DisplayPort video source to an HDMI display. It is a high performance cable with a moulded connector at each end.

- Ultra high resolution of 4K@60Hz
- 99.9% copper conductor
- High quality type A DisplayPort connector with lock, 15µm gold min. in contact area
- Triple shielding in cable and extra shielding in connector
- The mechanical lock incorporated in the DisplayPort connector effectively prevents connection loss
- High flexibility ensuring small bending radius

	PART NO.
Pro DisplayPort - HDMI 4K 1m	PRODPHDMI4K1
Pro DisplayPort - HDMI 4K 1.5m	PRODPHDMI4K1.5
Pro DisplayPort - HDMI 4K 2m	PRODPHDMI4K2
Pro DisplayPort - HDMI 4K 3m	PRODPHDMI4K3
Pro DisplayPort - HDMI 4K 5m	PRODPHDMI4K5
Pro DisplayPort - HDMI 4K 7.5m	PRODPHDMI4K7.5
Pro DisplayPort - HDMI 4K 10m	PRODPHDMI4K10
Pro DisplayPort - HDMI 4K 15m	PRODPHDMI4K15


[For more product info click here](#)



Combined ALL-IN-ONE Cables

Easy installation and no cable mess

Easy installation and no cable mess

Vivolink ALL-IN-ONE cables is a concept with the most popular cable types combined in one cable.

ALL-IN-ONE cables reduce cable mess and provide a nice and tidy installation.

At the cable ends, the cable is split into separate cables.




HDMI + USB A/B [2m-5m]

ALL-IN-ONE ultra flexible cable for interactive monitors is specially designed to connect a touch screen to a laptop computer. The USB-B connector and HDMI fit to touch screens. The USB-A connector and HDMI fit to a laptop computer.

- Two cables in one
- USB-A - USB-B
- Highly flexible, ideal for flying connections
- HDMI supports 4K@60Hz (2m-5m)

With USB Booster for products with weak USB signal	PART NO.
Pro HDMI with USB 2.0 A/B 2m with amp	PROHDMIUSBAB2AMP
Pro HDMI with USB 2.0 A/B 3m with amp	PROHDMIUSBAB3AMP
Pro HDMI with USB 2.0 A/B 4m with amp	PROHDMIUSBAB4AMP
Pro HDMI with USB 2.0 A/B 5m with amp	PROHDMIUSBAB5AMP

For more product info [click here](#)

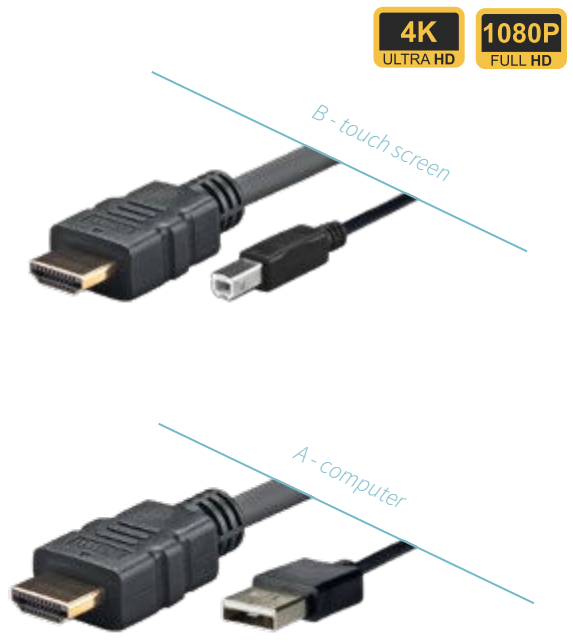

Typically used for **wall outlet** or **touch screens**


Vivolink ALL-IN-ONE cables are typically used as drop cables or fly cables. The benefit of combining several cables into one cable is a nice look with no cable mess.



HDMI + USB A/A [1m-5m]

This high performance HDMI cable is specially designed for fly-connections between laptop and desktop sockets. The cable has connections of both HDMI and USB in one cable. It supports 4K@60Hz.

- Two cables in one
- HDMI supports 4K@60Hz (1m-3m); 1920x1080P@60Hz (5m)
- USB 2.0 at each end
- Highly flexible, ideal for flying connections

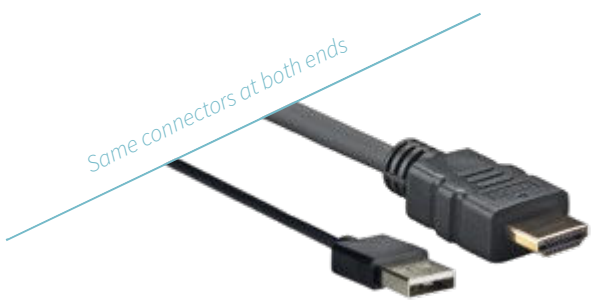

	PART NO.
Pro HDMI with USB 2.0 1m	PROHDMIUSB1
Pro HDMI with USB 2.0 2m	PROHDMIUSB2
Pro HDMI with USB 2.0 3m	PROHDMIUSB3
Pro HDMI with USB 2.0 5m	PROHDMIUSB5

For more product info [click here](#)



HDMI + DisplayPort + USB [1m-5m]





This high performance HDMI + DisplayPort cable, including USB with moulded connectors, supports advanced 4K connectivity.

- Three cables in one
- HDMI: 4K@60Hz (1m-3m), 1920x1080p@60Hz (5m)
- Inner conductor: 99.9 % pure copper
- High flexibility, ideal for flying connections

	PART NO.
Pro HDMI + USB + DP 1m	PROHDMIUSBDP1
Pro HDMI + USB + DP 2m	PROHDMIUSBDP2
Pro HDMI + USB + DP 3m	PROHDMIUSBDP3
Pro HDMI + USB + DP 5m	PROHDMIUSBDP5



For more product info [click here](#)

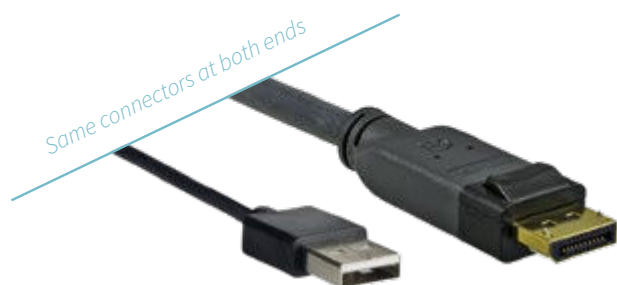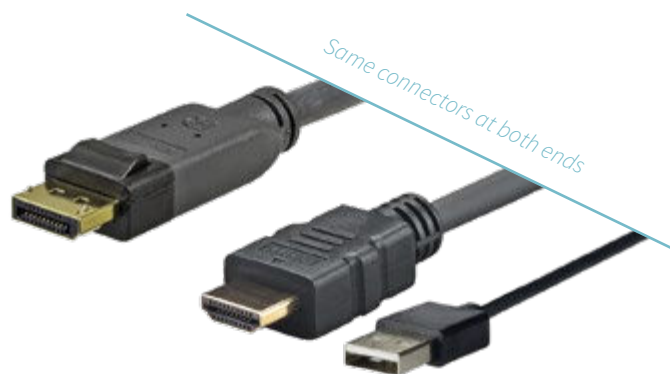

DisplayPort + USB [1m-5m]

This high performance DisplayPort + USB cable supports 4K@60Hz. This cable is designed to connect a DisplayPort video source + USB display to a wall outlet.

- Two cables in one
- DisplayPort supports 4K@60Hz (1m-3m), 1920x1080P@60Hz (5m)
- USB 2.0 type A male at both ends
- High flexibility, ideal for flying connections

	PART NO.
Pro DisplayPort - USB2.0 1m	PRODPUSB1
Pro DisplayPort - USB2.0 2m	PRODPUSB2
Pro DisplayPort - USB2.0 3m	PRODPUSB3
Pro DisplayPort - USB2.0 5m	PRODPUSB5



For more product info [click here](#)

HDMI + USB + VGA + Audio [1m-5m]



This cable is a combined cable of HDMI, USB2.0, micro VGA and audio. The cable is designed for use with laptop and desktop devices, with both HDMI and VGA - the most commonly used AV connections.

- Four cables in one
- VGA Supports 1920x1200p@60Hz
- HDMI Supports 4K@60Hz (1m-3m) 1920x1080p@60Hz (5m)
- USB 2.0 type A male at both ends

	PART NO.
PRO HDMI + USB and micro VGA 1m	PROHDMIMVGA1
PRO HDMI + USB and micro VGA 2m	PROHDMIMVGA2
PRO HDMI + USB and micro VGA 3m	PROHDMIMVGA3
PRO HDMI + USB and micro VGA 5m	PROHDMIMVGA5



For more product info [click here](#)



Audio Cables

Audio cables with 100% aluminum foil shielding. This cable works well under complicated working conditions.

Its increased flexibility ensures a small bending radius, and the gold-plated connectors and high-quality construction ensure a long service life.

- 99.9% copper conductor
- Double shielding
- High flexibility ensuring small bending radius

Audio [0.5m-30m]



	PART NO.
3.5mm cable M-M 0.5m	PROMJ0.5
3.5mm cable M-M 1m	PROMJ1
3.5mm cable M-M 1.5m	PROMJ1.5
3.5mm cable M-M 2m	PROMJ2
3.5mm cable M-M 3m	PROMJ3
3.5mm cable M-M 5m	PROMJ5
3.5mm cable M-M 7m	PROMJ7
3.5mm cable M-M 10m	PROMJ10
3.5mm cable M-M 12m	PROMJ12
3.5mm cable M-M 15m	PROMJ15
3.5mm cable M-M 20m	PROMJ20
3.5mm cable M-M 25m	PROMJ25
3.5mm cable M-M 30m	PROMJ30

	PART NO.
3.5mm female to RCA male 0.2m	PROMJFRCAM0.2

	PART NO.
3.5mm male to RCA female 0.2m	PROMJMRCAF0.2

For more product info [click here](#)


3.5mm - 2x RCA [0.5m-30m]



	PART NO.
3.5mm - 2 x RCA M-M 0.5m	PROMJRCA0.5
3.5mm - 2 x RCA M-M 1m	PROMJRCA1
3.5mm - 2 x RCA M-M 1.5m	PROMJRCA1.5
3.5mm - 2 x RCA M-M 2m	PROMJRCA2
3.5mm - 2 x RCA M-M 2.5m	PROMJRCA2.5
3.5mm - 2 x RCA M-M 3m	PROMJRCA3
3.5mm - 2 x RCA M-M 5m	PROMJRCA5
3.5mm - 2 x RCA M-M 7m	PROMJRCA7
3.5mm - 2 x RCA M-M 10m	PROMJRCA10
3.5mm - 2 x RCA M-M 12m	PROMJRCA12
3.5mm - 2 x RCA M-M 15m	PROMJRCA15
3.5mm - 2 x RCA M-M 20m	PROMJRCA20
3.5mm - 2 x RCA M-M 25m	PROMJRCA25
3.5mm - 2 x RCA M-M 30m	PROMJRCA30

For more product info [click here](#)

2x RCA - 2x RCA [0.5m-30m]

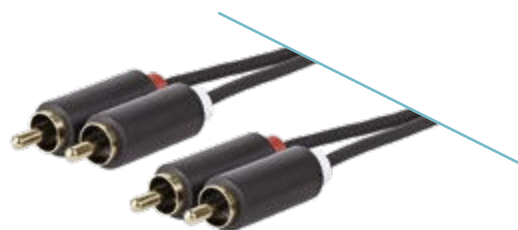

	PART NO.
2 x RCA - 2 x RCA M-M 0.5m	PRORCARCA0.5
2 x RCA - 2 x RCA M-M 1m	PRORCARCA1
2 x RCA - 2 x RCA M-M 1.5m	PRORCARCA1.5
2 x RCA - 2 x RCA M-M 2m	PRORCARCA2
2 x RCA - 2 x RCA M-M 3m	PRORCARCA3
2 x RCA - 2 x RCA M-M 5m	PRORCARCA5
2 x RCA - 2 x RCA M-M 7m	PRORCARCA7
2 x RCA - 2 x RCA M-M 10m	PRORCARCA10
2 x RCA - 2 x RCA M-M 12m	PRORCARCA12
2 x RCA - 2 x RCA M-M 15m	PRORCARCA15
2 x RCA - 2 x RCA M-M 20m	PRORCARCA20
2 x RCA - 2 x RCA M-M 25m	PRORCARCA25
2 x RCA - 2 x RCA M-M 30m	PRORCARCA30

For more product info [click here](#)

Stage Audio Cables

Audio XLR Cables are manufactured in extremely high quality for crystal clear and noiseless sound. Tight cable mesh in highly conductive tinned copper gives a perfect shielding and makes the cable robust against radiation noise.

- 22AWG heavy duty
- 94% tinned copper shielding
- High flexibility and small size
- Extremely high quality and robust connectors

	PART NO.
Jack cable 0,5m	PROAUDJACK0.5
Jack cable 1m	PROAUDJACK1
Jack cable 2,5m	PROAUDJACK2.5
Jack cable 3m	PROAUDJACK3
Jack cable 5m	PROAUDJACK5
Jack cable 10m	PROAUDJACK10




For more product info [click here](#)

Jack mono [6,3mm] to XLR Male



XLR female to Jack mono [6,3mm]




XLR female to Jack stereo [6,3mm]



	PART NO.
XLR M/F cable 0.5m	PROAUDXLRMF0.5
XLR M/F cable 1m	PROAUDXLRMF1
XLR M/F cable 2m	PROAUDXLRMF2
XLR M/F cable 5m	PROAUDXLRMF5
XLR M/F cable 10m	PROAUDXLRMF10
XLR M/F cable 15m	PROAUDXLRMF15
XLR M/F cable 20m	PROAUDXLRMF20



For more product info [click here](#)

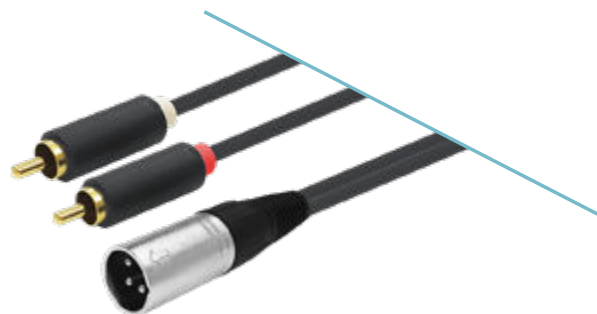

	PART NO.
XLR M - 2 x RCA M Stereo 5m	PROAUDXLRMRCA5



For more product info [click here](#)

Jack/Jack [6,3mm]



	PART NO.
Jack to XLR male 1m	PROAUDXLRJACK1
Jack to XLR male 5m	PROAUDXLRJACK5
Jack to XLR male 10m	PROAUDXLRJACK10



For more product info [click here](#)

	PART NO.
XLR Female to Mono Jack 6.35mm 1m	PROAUDXLRFJACK1
XLR Female to Mono Jack 6.35mm 3m	PROAUDXLRFJACK3
XLR Female to Mono Jack 6.35mm 6m	PROAUDXLRFJACK6
XLR Female to Mono Jack 6.35mm 10m	PROAUDXLRFJACK10



For more product info [click here](#)

	PART NO.
XLR Female to Stereo Jack 6.35mm 1m	PROAUDXLRFJACKS1
XLR Female to Stereo Jack 6.35mm 3m	PROAUDXLRFJACKS3
XLR Female to Stereo Jack 6.35mm 6m	PROAUDXLRFJACKS6
XLR Female to Stereo Jack 6.35mm 10m	PROAUDXLRFJACKS10



For more product info [click here](#)

XLR female to XLR male





Minijack stereo [3,5mm] 2 x XLR male

Suitable for speaker VLSP70

	PART NO.
Minijack stereo [3,5mm] 2 x XLR male 2m	PROMJXLRS02
Minijack stereo [3,5mm] 2 x XLR male 5m	PROMJXLRS5
Minijack stereo [3,5mm] 2 x XLR male 10m	PROMJXLRS10
Minijack stereo [3,5mm] 2 x XLR male 15m	PROMJXLRS15
 For more product info click here	

Accessories



	PART NO.
Pro XLR male connector	PROXLRMALE
Pro XLR female connector	PROXLRFEMALE
Pro 6.3mm jack connector	PROJACK6.3
Pro 6.3mm jack connector stereo	PROJACK6.3S



	PART NO.
Jack 6.3 M to minijack F 1.5m	PROMJJMF1.5
 For more product info click here	



100 meter Raw Cable on Wood Drum



	PART NO.
Microphone cable 2 wire black	PROAUD2100
 For more product info click here	

Low Smoke Zero Halogen Minijack

When health and safety are top priorities in the installation, the right cables are needed. Low Smoke Zero Halogen cabling is the safest choice for any application in which smoke is likely to come into contact with people, since no harmful toxins are actually released.

TPE Minijack [0.5m-30m]

- 99.9% pure copper conductor
- 24 AWG heavy duty
- Double shieldings in cable
- 3.5mm stereo connector, gold-plated contact for minimum transfer resistance



PART NO.		PART NO.	
Pro minijack cable 0.5m	PROMJLSZH0.5	Pro minijack cable 7m	PROMJLSZH7
Pro minijack cable 1m	PROMJLSZH1	Pro minijack cable 10m	PROMJLSZH10
Pro minijack cable 1.5m	PROMJLSZH1.5	Pro minijack cable 15m	PROMJLSZH15
Pro minijack cable 2m	PROMJLSZH2	Pro minijack cable 20m	PROMJLSZH20
Pro minijack cable 3m	PROMJLSZH3	Pro minijack cable 25m	PROMJLSZH25
Pro minijack cable 5m	PROMJLSZH5	Pro minijack cable 30m	PROMJLSZH30



For more product info [click here](#)



Speaker Cables

Vivolink speaker cables are made of 99,9% pure copper and are highly flexible to facilitate easy cable installations - particularly in environments with frequent bending.

Twin Speaker Cable

Twin Speaker Cable 2.5mm² / 4.0mm² – 100m, Black (Heavy Duty)
High-quality twin speaker cable designed for professional AV installations. Available in both 2.5mm² and 4.0mm² conductor sizes to match different power requirements and cable runs.

The heavy-duty PVC outer jacket provides robust protection and excellent flexibility, making installation easy and reliable — ideal for both fixed and mobile setups.



		PART NO.
2.5mm ² black, 100m on drum	2.5mm ² : 210*0.12mm pure copper, 13AWG, outer dia: 4.0mm	PROSPEAK1
2.5mm ² black, 200m on drum	2.5mm ² : 210*0.12mm pure copper, 13AWG, outer dia: 4.0mm	PROSPEAK2
4mm ² black, 100m on drum	4.0mm ² : 350*0.12mm pure copper, 11AWG, outer dia: 5.0mm	PROSPEAK4
4mm ² black, 500m on drum	4.0mm ² : 350*0.12mm pure copper, 11AWG, outer dia: 5.0mm	PROSPEAK4-500




For more product info [click here](#)

RS232 Control Cables

Vivolink high performance cables with moulded D-Sub 9 connectors at each end. This cable includes a 9-pin pass-through functionality and offers a high level of flexibility.

Pro RS232 [300m]


	PART NO.
Pro RS232 cable M - F 300m (on drum)	PRORS300
 For more product info click here	

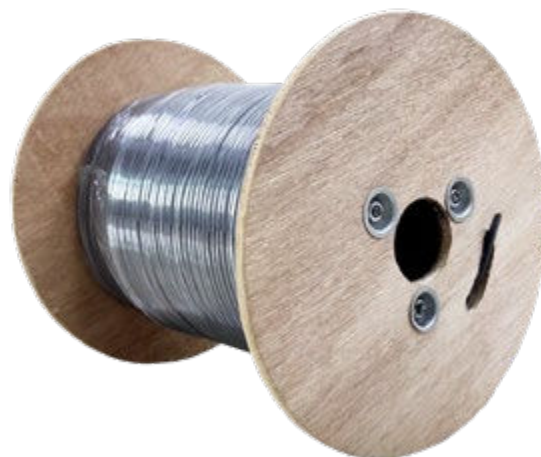

Pro RS232 [1m-15m]

- 99,9% copper
- Single shielding
- High flexibility

	PART NO.
Pro RS232 cable M - F 1m	PRORS1
Pro RS232 cable M - F 1.5m	PRORS1.5
Pro RS232 cable M - F 1.8m	PRORS1.8
Pro RS232 cable M - F 2m	PRORS2.0
Pro RS232 cable M - F 2.5m	PRORS2.5
Pro RS232 cable M - F 3m	PRORS3
Pro RS232 cable M - F 5m	PRORS5
Pro RS232 cable M - F 10m	PRORS10
Pro RS232 cable M - F 15m	PRORS15
 For more product info click here	

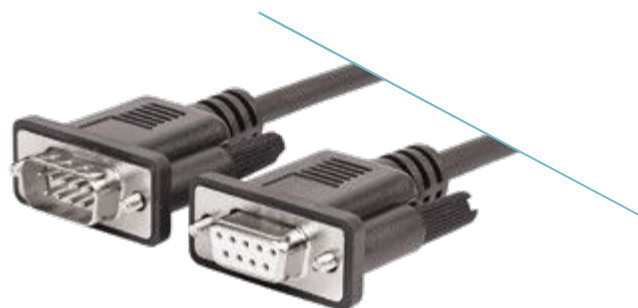

USB 2.0 Cables and Extension Cables

Vivolink high performance USB cables include a built-in amplifier, ideal for applications requiring long distance signal transmission.


Vivolink USB cables are available in lengths from 5m - 20m.

USB 2.0 A male - female [5m-20m]

	PART NO.
USB 2.0 cable A - A M - F 5m	PROUSBAAF5
USB 2.0 cable A - A M - F 10m	PROUSBAAF10
USB 2.0 cable A - A M - F 15m	PROUSBAAF15
USB 2.0 cable A - A M - F 20m	PROUSBAAF20



For more product info [click here](#)

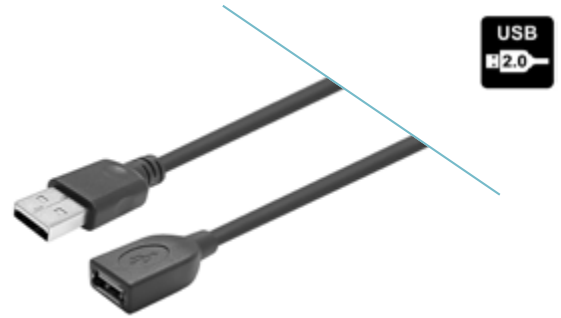


USB 2.0 A male - B male [5m-20m]

	PART NO.
USB 2.0 cable A - B M - M 5m	PROUSBAB5
USB 2.0 cable A - B M - M 10m	PROUSBAB10
USB 2.0 cable A - B M - M 15m	PROUSBAB15
USB 2.0 cable A - B M - M 20m	PROUSBAB20



For more product info [click here](#)


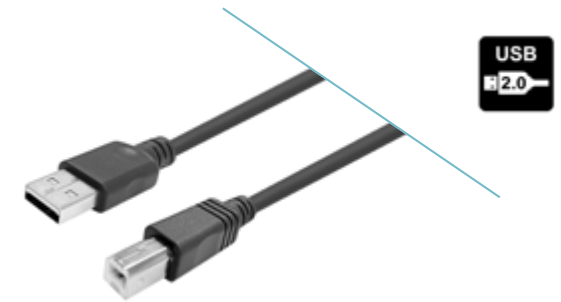


USB 2.0 A male - male [10m-20m]

	PART NO.
USB 2.0 cable A - A M - M 10m	PROUSBAA10
USB 2.0 cable A - A M - M 15m	PROUSBAA15
USB 2.0 cable A - A M - M 20m	PROUSBAA20



For more product info [click here](#)

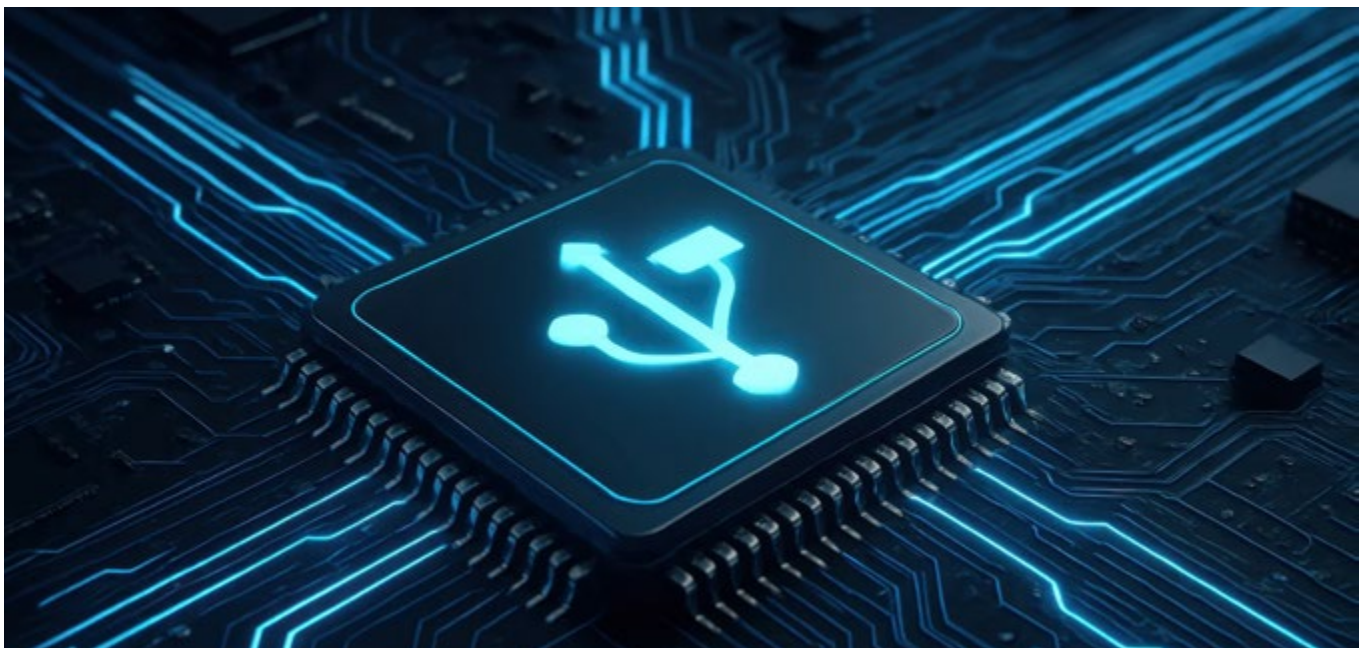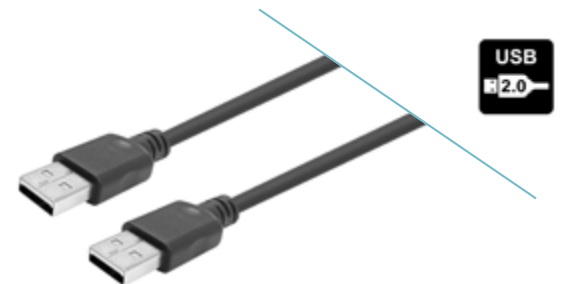

USB 3.0 Cables and Extension Cables

Vivolink high performance USB cables include a built-in amplifier, ideal for applications requiring long distance signal transmission.

Vivolink USB cables are available in lengths from 3m - 50m.

USB3.0 Optic Fiber USB-A male - USB-A female (5m-50m)

- USB 1.1 FS/ 2.0 HS support
- USB 3.1 Gen 1 support (5 Gbps)
- Minimum bend radius of cable: 20 mm
- Cable power supply required: Yes, USB Type-A
- Cable power supply information: 5 V 900 mA
- Voltage: 5 V
- Rated current (max) : 900 mA
- Also backward compatible with USB 2.0 standard

	PART NO.
USB 3.0 cable A - A M - F 5m	PROUSB3AAF5
USB 3.0 cable A - A M - F 10m	PROUSB3AAF10
USB 3.0 cable A - A M - F 20m	PROUSB3AAF20
USB 3.0 cable A - A M - F 30m	PROUSB3AAF30
USB 3.0 cable A - A M - F 40m	PROUSB3AAF40
USB 3.0 cable A - A M - F 50m	PROUSB3AAF50



For more product info [click here](#)

Pigtail cable for optical included



USB 3.0 A male - female [3m-15m]

	PART NO.
USB 3.0 cable A - A M - F 3m	PROUSB3AAF3C
USB 3.0 cable A - A M - F 5m	PROUSB3AAF5C
USB 3.0 cable A - A M - F 7m	PROUSB3AAF7C
USB 3.0 cable A - A M - F 10m	PROUSB3AAF10C
USB 3.0 cable A - A M - F 12.5m	PROUSB3AAF12.5C
USB 3.0 cable A - A M - F 15m	PROUSB3AAF15C



For more product info [click here](#)




USB 3.0 A male - B male [3m-20m]

This version of the cable can be used to add extra power if the port on the product cannot deliver power.

	PART NO.
USB 3.0 cable A - B M - M 3m	PROUSB3AB3C-DUAL
USB 3.0 cable A - B M - M 5m	PROUSB3AB5C-DUAL
USB 3.0 cable A - B M - M 7m	PROUSB3AB7C-DUAL
USB 3.0 cable A - B M - M 10m	PROUSB3AB10C-DUAL
USB 3.0 cable A - B M - M 12.5m	PROUSB3AB12.5C-DUAL
USB 3.0 cable A - B M - M 15m	PROUSB3AB15C-DUAL
USB 3.0 cable A - B M - M 20m	PROUSB3AB20C-DUAL



For more product info [click here](#)

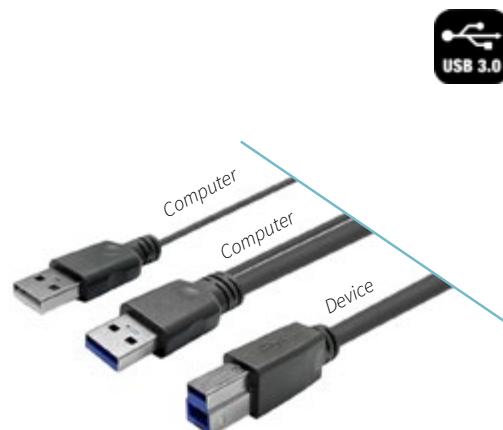

USB-C angled to USB-A male cable [1m-10m]

Convert USB-C devices to connect to HOST USB-A 3.x or 2.0


Can be used to connect USB-C devices to USB-A ports. The cable supports both USB3.0 and USB2.0 data simultaneously



	PART NO.
USB-C angled male - A male Cable 1m Black	PROUSBCAMM1A
USB-C angled male - A male Cable 2m Black	PROUSBCAMM2A
USB-C angled male - A male Cable 3m Black	PROUSBCAMM3A
USB-C angled male - A male Cable 5m Black	PROUSBCAMM5A
USB-C angled male - A male Cable 7.5m Black	PROUSBCAMM7.5A
USB-C angled male - A male Cable 10m Black	PROUSBCAMM10A



For more product info [click here](#)

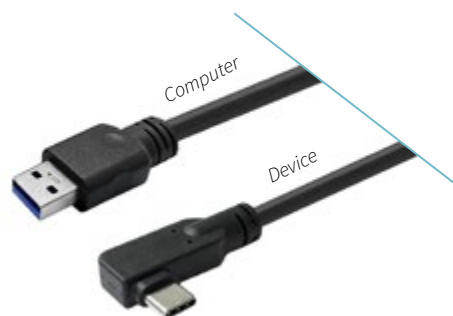

USB-C to USB-A male cable [1m-30m]

Convert USB-C devices to connect to HOST USB-A 3.x or 2.0


Can be used to connect USB-C devices to USB-A ports. The cable supports both USB3.0 and USB2.0 data simultaneously



	PART NO.
USB-C male - A male Cable 1m Black	PROUSBCAMM1
USB-C male - A male Cable 2m Black	PROUSBCAMM2
USB-C male - A male Cable 3m Black	PROUSBCAMM3
USB-C male - A male Cable 5m Black	PROUSBCAMM5
USB-C male - A male Cable 7.5m Black	PROUSBCAMM7.5
USB-C male - A male Cable 10m Black	PROUSBCAMM10
USB-C male - A male Cable 12.5m Black	PROUSBCAMM12.5
USB-C male - A male Cable 15m Black	PROUSBCAMM15




For more product info [click here](#)

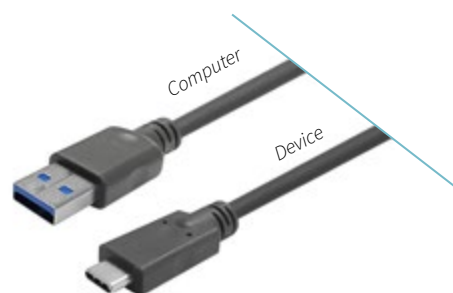

	PART NO.
USB-C male - A male optic Cable 15m Black	PROUSBCAMMOP15
USB-C male - A male optic Cable 20m Black	PROUSBCAMMOP20
USB-C male - A male optic Cable 25m Black	PROUSBCAMMOP25
USB-C male - A male optic Cable 30m Black	PROUSBCAMMOP30



For more product info [click here](#)

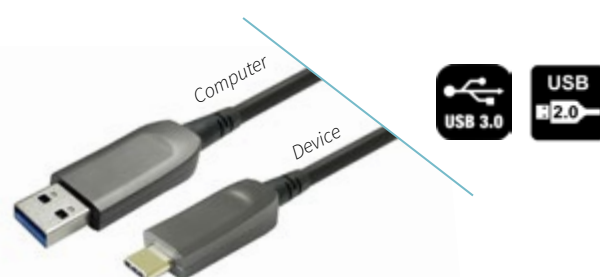

USB-C to USB-B male cable [5m-20m]

Convert USB-C to USB-B 3.0

Can be used for connecting USB3.0 devices to USB-C laptop.


As an example, a PTZ USB3.0 conference camera.



	PART NO.
USB-C male - B male Cable 5m Black	PROUSBCBMM5
USB-C male - B male Cable 7.5m Black	PROUSBCBMM7.5
USB-C male - B male Cable 10m Black	PROUSBCBMM10
USB-C male - B male Cable 12.5m Black	PROUSBCBMM12.5
USB-C male - B male Cable 15m Black	PROUSBCBMM15
USB-C male - B male Cable 20m Black	PROUSBCBMM20



For more product info [click here](#)

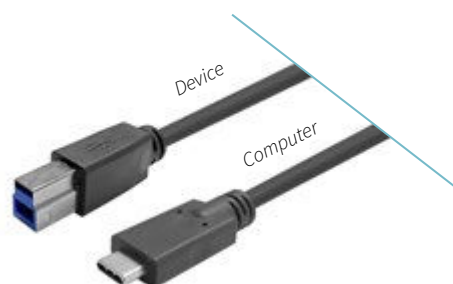

THE BEST CONNECTION YOU'LL EVER MAKE



Getting the Connection Right, Every Time

Professional USB-C Cables by Vivolink

Executive Summary

Vivolink USB-C cables are engineered for high-performance data and power transmission across professional AV and IT environments. Supporting up to 20 Gbps throughput and 100 W Power Delivery, they provide dependable, high-bandwidth connections for docking stations, AV routing, and workstation setups. This document presents the design, specifications, compliance, and testing methodology that define Vivolink's commitment to quality and reliability — helping integrators, engineers, and procurement professionals make informed choices for demanding applications.

A Closer Look at Vivolink's USB-C Solutions

In enterprise AV environments, performance and stability are crucial. Vivolink USB-C to USB-C cables deliver consistent, interference-free transmission even over extended lengths without amplification or signal loss.

Key Design Attributes

- USB-C male ↔ USB-C male connectors
- 20 Gbps data speed (USB 3.2 Gen 2×2)
- 100 W USB Power Delivery
- Reinforced triple shielding (copper foil + 100% tinned copper + 90% braid)
- Fire-resistant TPE jacket for safety and flexibility
- Nickel-plated shell and gold-plated contacts for long-term corrosion resistance
- Operating temperature: -40 °C to +80 °C
- Tested bend radius: 62 – 68 cm depending on cable gauge (28 – 26 AWG)

These specifications ensure signal stability, mechanical strength, and electrical safety, even in mission-critical installations.

What Sets Vivolink Apart

- True 4K@60 Hz (4:4:4) video and 20 Gbps data transfer for seamless collaboration and display applications.
- Full HDCP 2.3 compliance and DisplayPort Alternate Mode support.
- Triple shielding prevents EMI and crosstalk — ideal for dense AV racks or industrial setups.
- Integrated e-Marker chip ensures correct PD negotiation and device compatibility.
- Driver-free plug-and-play performance across all major brands.
- TPE jacket for flame resistance and long-term flexibility.
- Tested flex life exceeding 7,500 cycles under full load conditions.
- CE, RoHS, and REACH certification ensuring environmental and electrical compliance.

Testing & Quality Assurance

Every Vivolink cable undergoes a multi-stage verification process to guarantee durability and performance consistency:

- Each cable is tested 3 times during production. We can guarantee that every cable that leaves our factory is fully tested and works
- Continuity and impedance verification
- EMI and signal integrity analysis using eye-diagram validation
- Insertion and return loss testing at 20 Gbps
- Mechanical bend and strain-relief testing
- Thermal and environmental stress tests across -40°C to $+80^{\circ}\text{C}$
- Long-term operational simulation to verify flex durability and shielding integrity

Vivolink validates performance, not just compliance — ensuring every cable delivers consistent throughput and safety across production batches.



Safety, Reliability & Risk Management



Vivolink USB-C cables integrate overcurrent, overvoltage, and short-circuit protection, ensuring safe power negotiation up to 100 W. Materials are halogen-free and meet flammability standards, making them safe for corporate and industrial use.

Environmental & Sustainability Commitment



Vivolink manufactures in accordance with RoHS and REACH environmental directives. Packaging is fully recyclable, and ongoing initiatives focus on reducing supply-chain carbon footprint through sustainable materials and logistics.

Use Cases & Deployment Scenarios

- Docking stations for laptop connectivity and charging
- AV routing and meeting rooms — reliable, shielded performance for conference systems
- Digital signage and KVM extension in public or industrial displays
- Laboratories and industrial setups requiring stable data and power delivery
- Event and broadcast environments where uptime is critical

Conclusion

Vivolink USB-C cables combine speed, safety, and endurance to meet the high expectations of AV professionals and system integrators. Backed by comprehensive testing and compliance certifications, they represent a future-ready solution for modern digital infrastructures.



USB-C to USB-C Cable - Mini Coax for professional use

8K
ULTRA HD

USB-C - USB-C cable [0.5m-10m]

Vivolink USB-C cable for long distance supporting the highest data rate.



	PART NO.
USB-C - C cable 0,5m black	PROUSBCMM0.5
USB-C - C cable 1m black	PROUSBCMM1
USB-C - C cable 2m black	PROUSBCMM2
USB-C - C cable 3m black	PROUSBCMM3
USB-C - C cable 4m black	PROUSBCMM4
USB-C - C cable 5m black	PROUSBCMM5
USB-C - C cable 6m black	PROUSBCMM6
USB-C - C cable 7m black	PROUSBCMM7
USB-C - C cable 7.5m black	PROUSBCMM7.5
USB-C - C cable 8m black	PROUSBCMM8
USB-C - C cable 9m black	PROUSBCMM9
USB-C - C cable 10m black	PROUSBCMM10



For more product
info [click here](#)

- Mini Coax
- Full featured
- Generation USB3.2
- Supports up to 20 Gbps data
- 5~20V/5A + E-Mark
- Up to 100W Power
- Supports DisplayLink, DP Alt-mode sources with up to 8K@30Hz video resolution
- Reversible USB-C connectors in metal housing with gold-plated contacts

USB-C - USB-C angled cable [0.5m-10m]

Vivolink USB-C cable for long distance supporting the highest data rate.

	PART NO.
USB-C - C angled cable 0,5m black	PROUSBCMM0.5A
USB-C - C angled cable 1m black	PROUSBCMM1A
USB-C - C angled cable 2m black	PROUSBCMM2A
USB-C - C angled cable 3m black	PROUSBCMM3A
USB-C - C angled cable 4m black	PROUSBCMM4A
USB-C - C angled cable 5m black	PROUSBCMM5A
USB-C - C angled cable 6m black	PROUSBCMM6A
USB-C - C angled cable 7m black	PROUSBCMM7A
USB-C - C angled cable 7.5m black	PROUSBCMM7.5A
USB-C - C angled cable 8m black	PROUSBCMM8A
USB-C - C angled cable 9m black	PROUSBCMM9A
USB-C - C angled cable 10m black	PROUSBCMM10A



For more product
info [click here](#)



- Mini Coax
- Full featured
- Generation USB3.2
- Supports up to 20 Gbps data
- 5~20V/5A + E-Mark
- Up to 100W Power
- DP Alt-mode sources with up to 8K@30Hz video resolution
- Reversible USB-C connectors in metal housing with gold-plated contacts

USB-C - USB-C angled cable with screw lock [0.5m-10m]

Vivolink USB-C cable for long distance supporting the highest data rate.

	PART NO.
USB-C - C cable 1.5m black	PROUSBCMMS1.5
USB-C - C cable 2m black	PROUSBCMMS2
USB-C - C cable 3m black	PROUSBCMMS3
USB-C - C cable 4m black	PROUSBCMMS4
USB-C - C cable 5m black	PROUSBCMMS5
USB-C - C cable 6m black	PROUSBCMMS6
USB-C - C cable 7m black	PROUSBCMMS7
USB-C - C cable 7.5m black	PROUSBCMMS7.5
USB-C - C cable 8m black	PROUSBCMMS8
USB-C - C cable 9m black	PROUSBCMMS9
USB-C - C cable 10m black	PROUSBCMMS10



For more product
info [click here](#)



- Mini Coax
- Full featured
- Generation USB3.2
- Supports up to 20 Gbps data
- 5~20V/5A + E-Mark
- Up to 100W Power
- Supports DisplayLink, DP Alt-mode sources with up to 8K@30Hz video resolution
- Reversible USB-C connectors in metal housing with gold-plated contacts

USB-C - USB-C angled cable with screw lock [0.5m-10m]

Vivolink USB-C cable for long distance supporting the highest data rate.

- Mini Coax
- Full featured
- Generation USB3.2
- Supports up to 20 Gbps data
- 5~20V/5A + E-Mark
- Up to 100W power
- DP Alt-mode sources with up to 8K@30Hz video resolution
- Reversible USB-C connectors in metal housing with gold-plated contacts



PART NO.		PART NO.	
USB-C - C cable 1m black	PROUSBCMMS1A	USB-C - C cable 6m black	PROUSBCMMS6A
USB-C - C cable 1.5m black	PROUSBCMMS1.5A	USB-C - C cable 7m black	PROUSBCMMS7A
USB-C - C cable 2m black	PROUSBCMMS2A	USB-C - C cable 7.5m black	PROUSBCMMS7.5A
USB-C - C cable 3m black	PROUSBCMMS3A	USB-C - C cable 8m black	PROUSBCMMS8A
USB-C - C cable 4m black	PROUSBCMMS4A	USB-C - C cable 9m black	PROUSBCMMS9A
USB-C - C cable 5m black	PROUSBCMMS5A	USB-C - C cable 10m black	PROUSBCMMS10A

 For more product info [click here](#)

USB-C - USB-C extender cable [0.3m-2m]

Vivolink USB-C Male til Female extender cables

- Mini Coax
- Full featured
- Generation USB3.2
- Supports up to 20 Gbps data
- Reversible USB-C connectors in metal housing with gold-plated contacts

PART NO.	
USB-C male - USB-C female 0.3m	PROUSBCMF0.3
USB-C male - USB-C female 1m	PROUSBCMF1
USB-C male - USB-C female 1.5m	PROUSBCMF1.5
USB-C male - USB-C female 2m	PROUSBCMF2

 For more product info [click here](#)



USB-C - USB-C angled extender cable [0.3m-2m]

PART NO.	
USB-C male - USB-C female 0.3m	PROUSBCMF0.3A
USB-C male - USB-C female 1m	PROUSBCMF1A
USB-C male - USB-C female 1.5m	PROUSBCMF1.5A
USB-C male - USB-C female 2m	PROUSBCMF2A





USB-C cable with USB-A Adapter

- Generation USB3.2
- Supports 20 Gbps data
- 5~20V/5A + E-Mark
- Up to 100W power
- DP Alt-mode sources with up to 4K@60Hz video resolution
- Reversible USB-C connectors in metal housing with gold-plated contacts
- Note: USB-A adapter does not support charging



PART NO.	
USB-C cable with adapter 1.5m	PROUSBCMM1.5ADP
 For more product info click here	


USB-C cable Optic [10m-15m]

Vivolink USB-C long distance cable is designed to support AV applications on long distance without compromising picture quality. Supporting up to 8K@30Hz picture resolution + bi-directional USB data for computer peripherals like: Webcam, Soundbar, Touch feedback or other USB devices.

The cable supports 20 Gbps data rates and delivers up to 100 watts of power to charge connected laptop.

Perfect match for long cable connections for interactive touch screens.

- 4 x optic lanes supports up to 8K@30Hz video resolution
- Pull force 30kg
- Supporting bi-directional data for peripherals via USB 2.0 and USB 1.1 up to 480 Mbps (Mouse, Keyboard, Thumb Drive, Speakerphone and Webcam)
- Up to 100W power for 10m (90W for 12.5m and 60W 15m)
- Supports DisplayPort 1.4, DP Alt-mode

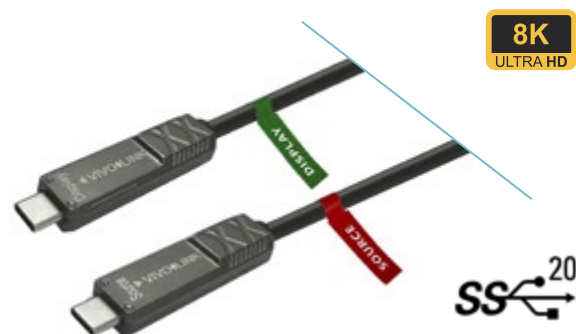

PART NO.	
USB-C - C cable optic 10m black	PROUSBCMM100P
USB-C - C cable optic 12.5m black	PROUSBCMM12.50P
USB-C - C cable optic 15m black	PROUSBCMM150P
 For more product info click here	

Vivolink Keystone Solutions Universal AV connectivity for flexible installations



Vivolink's Keystone modules are designed to fit standard keystone openings, making them a highly flexible solution for professional AV installations. They are compatible with a wide range of wall plate systems – including popular formats like FUGA and Thorsmann, which are widely used in electrical installations for their modular frame structures.

Whether you're using FUGA wall boxes with keystone-compatible inserts or Thorsmann-style surface mount frames, Vivolink's keystone modules snap in easily and deliver a clean, professional result.

- Designed for universal keystone openings
- Fits systems like FUGA and Thorsmann – and many others with keystone support
- Enables use in both wall plate setups and 19" patch panels for rack installations
- Ideal for meeting rooms, classrooms, AV racks, and commercial environments
- Available in HDMI, USB-A, USB-B, USB-C – multiple lengths and color options
- High-quality connectors in a sleek, modular design
- A true plug-and-play solution for modern AV integrators





PART NO.	
Keystone To XLR Adapter	PROKEYADP-XLR
 For more product info click here	

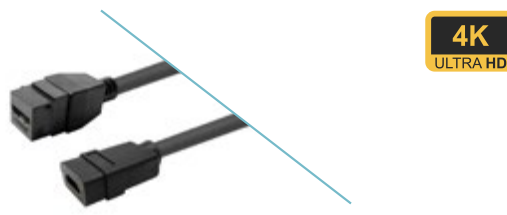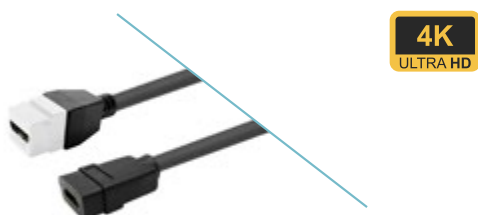


PART NO.	
Pro Keystone White HDMI Female to HDMI Female 0.2m	PROKEYHDMIFF0.2W
 For more product info click here	

PART NO.	
Pro Keystone Black HDMI Female to HDMI Female 0.2m	PROKEYHDMIFF0.2B
 For more product info click here	

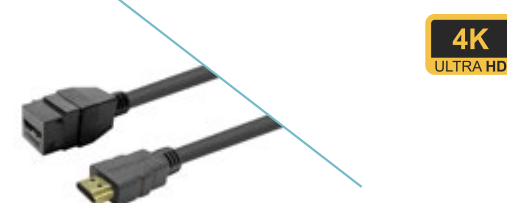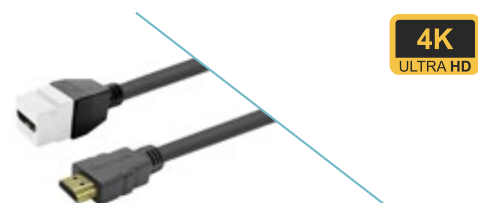


PART NO.	
Pro Keystone White HDMI Female to HDMI Male 1m	PROKEYHDMIFM1W
Pro Keystone White HDMI Female to HDMI Male 2m	PROKEYHDMIFM2W
Pro Keystone White HDMI Female to HDMI Male 3m	PROKEYHDMIFM3W
Pro Keystone White HDMI Female to HDMI Male 5m	PROKEYHDMIFM5W
 For more product info click here	

PART NO.	
Pro Keystone Black HDMI Female to HDMI Male 1m	PROKEYHDMIFM1B
Pro Keystone Black HDMI Female to HDMI Male 2m	PROKEYHDMIFM2B
Pro Keystone Black HDMI Female to HDMI Male 3m	PROKEYHDMIFM3B
Pro Keystone Black HDMI Female to HDMI Male 5m	PROKEYHDMIFM5B
 For more product info click here	



PART NO.	
Pro Keystone White USB3.0 A-Female to USB3.0 A-Female 0.2m	PROKEYUSB3AFF0.2W
 For more product info click here	




PART NO.	
Pro Keystone Black USB3.0 A-Female to USB3.0 A-Female 0.2m	PROKEYUSB3AFF0.2B
 For more product info click here	




PART NO.	
Pro Keystone White USB3.0 A-Female to USB3.0 A-Male 1m	PROKEYUSB3AFM1W
Pro Keystone White USB3.0 A-Female to USB3.0 A-Male 2m	PROKEYUSB3AFM2W
Pro Keystone White USB3.0 A-Female to USB3.0 A-Male 3m	PROKEYUSB3AFM3W
Pro Keystone White USB3.0 A-Female to USB3.0 A-Male 5m	PROKEYUSB3AFM5W
 For more product info click here	



PART NO.	
Pro Keystone Black USB3.0 A-Female to USB3.0 A-Male 1m	PROKEYUSB3AFM1B
Pro Keystone Black USB3.0 A-Female to USB3.0 A-Male 2m	PROKEYUSB3AFM2B
Pro Keystone Black USB3.0 A-Female to USB3.0 A-Male 3m	PROKEYUSB3AFM3B
Pro Keystone Black USB3.0 A-Female to USB3.0 A-Male 5m	PROKEYUSB3AFM5B
 For more product info click here	




PART NO.	
Pro Keystone White USB3.0 A-Female to USB3.0 B-Male 1m	PROKEYUSB3AFBM1W
Pro Keystone White USB3.0 A-Female to USB3.0 B-Male 2m	PROKEYUSB3AFBM2W
Pro Keystone White USB3.0 A-Female to USB3.0 B-Male 3m	PROKEYUSB3AFBM3W
Pro Keystone White USB3.0 A-Female to USB3.0 B-Male 5m	PROKEYUSB3AFBM5W
 For more product info click here	



PART NO.	
Pro Keystone Black USB3.0 A-Female to USB3.0 B-Male 1m	PROKEYUSB3AFBM1B
Pro Keystone Black USB3.0 A-Female to USB3.0 B-Male 2m	PROKEYUSB3AFBM2B
Pro Keystone Black USB3.0 A-Female to USB3.0 B-Male 3m	PROKEYUSB3AFBM3B
Pro Keystone Black USB3.0 A-Female to USB3.0 B-Male 5m	PROKEYUSB3AFBM5B
 For more product info click here	



PART NO.	
Pro Keystone White USB-C female to USB-C male 0.5m	PROKEYUSBCFM0.5W
Pro Keystone White USB-C female to USB-C male 1m	PROKEYUSBCFM1W
Pro Keystone White USB-C female to USB-C male 2m	PROKEYUSBCFM2W
 For more product info click here	



PART NO.	
Pro Keystone Black USB-C female to USB-C male 0.5m	PROKEYUSBCFM0.5B
Pro Keystone Black USB-C female to USB-C male 1m	PROKEYUSBCFM1B
Pro Keystone Black USB-C female to USB-C male 2m	PROKEYUSBCFM2B
 For more product info click here	

Premium Adapter Ring to HDMI




Premium designed adapters in aluminum.
Perfect adapters for small computers.

With a Vivolink HDMI adapter ring securely locked to the HDMI cable in the meeting room, everything is ready when needed. The adapter ring comes with a special lock for HDMI cable, so it cannot be removed without a tool.

All adapters support **4K@60Hz** (except Apple lightning adapter). Ideal for computers and tablets with USB-C, DisplayPort, mini DisplayPort, Apple Lightning.

PROADRING7S/13S

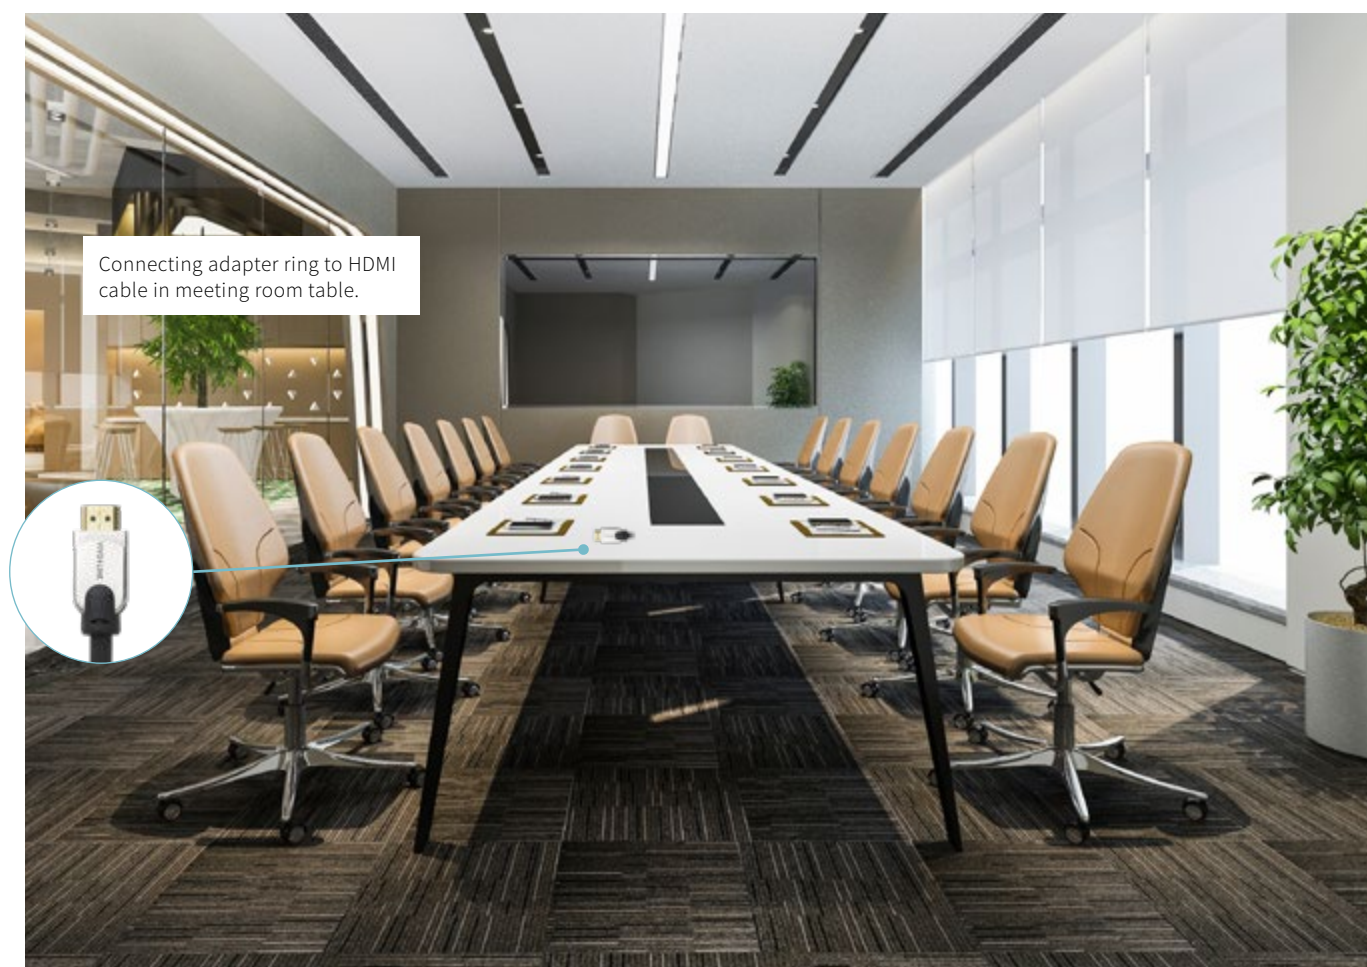

Connecting adapter ring to HDMI cable in meeting room table.

*HDMI cable not included

Versions of adapter ring

PART NO.				PART NO.	
USB-C				PROADRING4S	Wire string for the PROADRING-S adapter
USB-C	Mini DisplayPort	DisplayPort		PROADRING7S	Extra lock screw as sparepart
USB-C	Mini DisplayPort			PROADRING8S	Extra Alan key as sparepart
USB-C			Lightning	PROADRING10S	
USB-C	Mini DisplayPort	DisplayPort	Lightning	PROADRING13S	

For more product info [click here](#)

USB-C adapter for laptops without USB-C ports



HDMI & USB-A to USB-C Adapter

The Vivolink PROADHDMI adapter provides an easy solution for laptops that do not have a USB-C port. It converts HDMI and USB-A to USB-C, allowing seamless connection of USB-C-based peripherals such as cameras, microphones, and displays in meeting rooms and AV setups.

This compact adapter supports 4K@30Hz video output and USB 3.0 data transfer speed, ensuring reliable performance for professional AV environments.

- Converts HDMI and USB-A to USB-C
- Supports 4K@30Hz video resolution
- Supports USB 3.0 data transfer for USB peripherals
- 15 cm attached cable for flexible installation



PART NO.	
HDMI & USB-A to USB-C Adapter	PROADHDMI
 For more product info click here	





USB-C to HDMI male cable [1m-10m]




Convert USB-C to HDMI 4K signal

Supports DisplayLink, DP Alt-mode sources with up to 4K@60Hz video resolution.

	PART NO.
USB-C to HDMI male Cable 1m	PROUSBCHDMIMM1
USB-C to HDMI male Cable 2m	PROUSBCHDMIMM2
USB-C to HDMI male Cable 3m	PROUSBCHDMIMM3
USB-C to HDMI male Cable 4m	PROUSBCHDMIMM4
USB-C to HDMI male Cable 5m	PROUSBCHDMIMM5
USB-C to HDMI male Cable 7.5m	PROUSBCHDMIMM7.5
USB-C to HDMI male Cable 10m	PROUSBCHDMIMM10

 For more product info [click here](#)

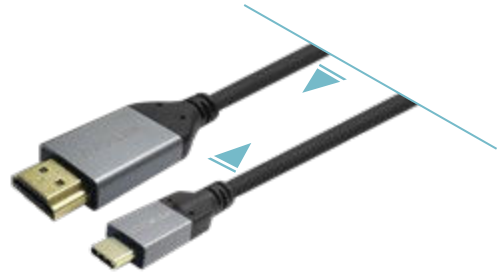

USB-C to HDMI female cable [1m-3m]




Convert USB-C to HDMI 4K signal

Supports DisplayLink, DP Alt-mode sources with up to 4K@60Hz video resolution.

	PART NO.
USB-C to HDMI female Cable 1m Black	PROUSBCHDMIMF1
USB-C to HDMI female Cable 2m Black	PROUSBCHDMIMF2
USB-C to HDMI female Cable 3m Black	PROUSBCHDMIMF3

 For more product info [click here](#)

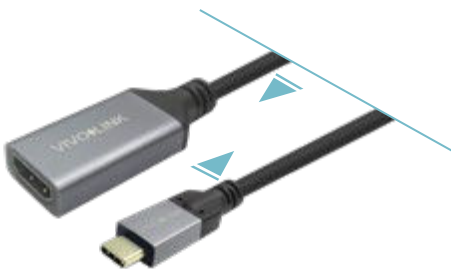

HDMI female to USB-C cable [1m-3m]




Convert HDMI 4K signal to USB-C

Supports DisplayLink, DP Alt-mode sources with up to 4K@60Hz video resolution.

	PART NO.
HDMI female to USB-C Cable 1m Black	PROHDMIUSBCFM1
HDMI female to USB-C Cable 2m Black	PROHDMIUSBCFM2
HDMI female to USB-C Cable 3m Black	PROHDMIUSBCFM3

 For more product info [click here](#)

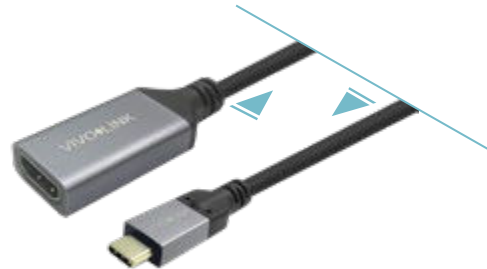

Touch Screen Cable [3m-10m]

Your existing Touch Screens and Interactive Projectors can easily be upgraded to the new USB-C standard with our invention.

Newer computers come only with USB-C connector, which means that they cannot be used for older already installed Touch Screens and Interactive projectors.

Our Touch Screen Cable can extend the lifetime of your Touch Screens and Interactive projectors with full functionality of touch feedback and of course 4K resolution to give you the best image quality. The Touch Screen Cable have a built-in chipset, which convert USB-C signal to HDMI and USB touch feedback.

It is very easy to install, you simply replace your old cable with the new Touch Screen Cable, and you are ready and upgraded. For your convenience, we give you up to 10-meter cable length, so you have more flexibility in the classroom.

Easy plug & play upgrade solution for existing touch screen smart boards and projectors.

- Built-in converter from new USB-C to HDMI and USB-B
- Supports 4K resolution via HDMI port for best image quality
- Easy plug & play upgrade for touch screen smart boards
- USB connection enables touchback functionality on the smart board
- Patent pending



	PART NO.
Touch Screen Cable 3m	PROUSBCHDMIUSBB3
Touch Screen Cable 5m	PROUSBCHDMIUSBB5
Touch Screen Cable 7.5m	PROUSBCHDMIUSBB7.5
Touch Screen Cable 10m	PROUSBCHDMIUSBB10

 For more product info [click here](#)

Touch Screen Cable & Charging [5m-7.5m]

- Built-in converter from new USB-C to HDMI and USB-B
- Supports 4K resolution via HDMI port for best image quality
- USB2.0 480Mbit bi-directional speed
- 100W PD power connector to charge laptop (60W for 7.5m)
- Easy plug & play upgrade for touch screen smart boards
- USB connection enables touchback functionality on the smart board
- Patent pending

	PART NO.
Touchscreen Cable with charger 5m Black	PROUSBCHDMIUSBB5-CHARGE
Touchscreen Cable with charger.7.5m Black	PROUSBCHDMIUSBB7.5-CHARGE

 For more product info [click here](#)



One Cable - All Connected



USB-C HUB Cable with HDMI & USB3.0 & Charging [3m-7.5m]

USB-C HUB Cable with HDMI & USB-A
All-in-one connectivity for meeting rooms, huddle spaces, desks, and education setups

The Vivolink PROUSBCHDMIUSB3 series is a highperformance USB-C cable with a built-in HUB, designed for seamless integration between modern laptops and existing AV infrastructure. This smart all-in-one cable solution combines our proven HUB2 technology in a clean, ready-to-install format.

- USB-C input (host) from laptop
- Converts to HDMI (supports up to 4K@30Hz) for direct display connection
- Adds USB-A 3.0 SuperSpeed (5 Gbit/s) for peripherals like cameras, soundbars, or microphones
- Built-in USB-C Power Delivery passthrough – simply connect a USB-C charger behind the screen and power is routed back to the laptop



USB-C Connection to **Laptop**
HDMI Connection to **Display**
USB-A Connection to **Camera**

Charge your laptop

	PART NO.
USB-C HUB Cable 3.0 + Charger 3m Black	PROUSBCHDMIUSB3-3
USB-C HUB Cable 3.0 + Charger 5m Black	PROUSBCHDMIUSB3-5
USB-C HUB Cable 3.0 + Charger 7.5m Black	PROUSBCHDMIUSB3-7.5

 For more product info [click here](#)



USB-C Presentation Hub for Single Display



True one-cable-connect for conference rooms or TV carts

Professional **4K@30Hz** USB-C HUB designed for meeting rooms and video conferencing systems. Connect laptop, camera, microphone, display, and network - all through a single USB-C cable with 100W charging and 10Gbps data transfer.

The Vivolink VLUSBCHUB2V2 is a 4K USB-C Hub designed for seamless video conferencing. Simply connect your laptop with a single USB-C cable to access all in-room peripherals, share 4K video and audio via HDMI, enjoy wired network connection, and charge your device simultaneously.


Designed for fixed installation under or on top of the meeting table, this Hub provides a clean and efficient setup. A built-in DIP switch allows control of USB power management - choose between constant power or auto power following the host connection.

- HDMI 1.4 output, 4K@30 Hz (4:4:4)
- USB-C input with 100 W Power Delivery
- USB3.2 Gen2 data transfer via USB-C
- 2 × USB3.2 Gen1 + 1 × USB2.0 for camera, keyboard, mouse
- Gigabit LAN connection
- Plug & Play – supports DP Alt Mode
- Includes 100 W PSU with EU & UK plugs
- Max. recommended cable length 5 meter: PROUSBCMMS5

USB-C cable for Laptop connection (HOST)



PART NO.	
USB-C HUB for conference system	VLUSBCHUB2V2
For more product info click here	

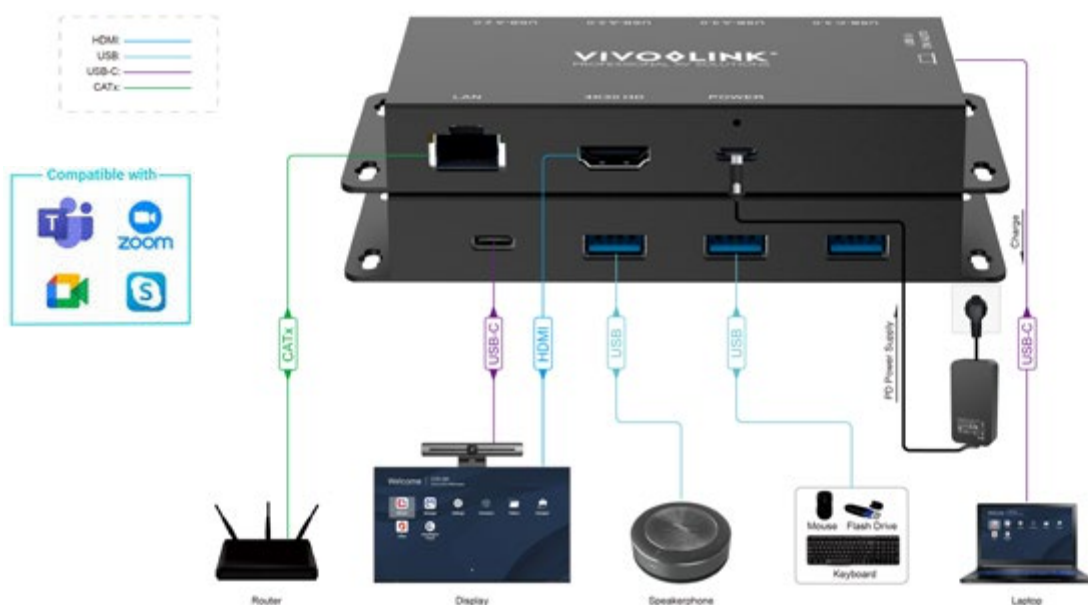

USB-C Presentation Hub for Single Display




True one-cable-connect for conference rooms or TV carts

Professional **4K@60Hz** USB-C HUB designed for meeting rooms and video conferencing systems. Connect laptop, camera, microphone, display, and network – all through a single USB-C cable with 100W charging and 10Gbps data transfer.

The Vivolink VLUSBCHUB4 is a professional 4K60 USB-C Hub for modern conference setups. Connect your laptop with a single USB-C cable to access all room peripherals, share 4K60 4:4:4 video and audio via HDMI, enjoy a wired Gigabit network, and charge your device up to 100W simultaneously. It features three high-speed USB ports (2x USB-A and 1x USB-C) with 10Gbps data transfer for cameras, microphones, and other devices. Built-in DIP switches for EDID and USB Power Management provide full setup flexibility. Designed for fixed installation under or on top of the meeting table, it ensures a clean and efficient workspace.

- 4K60 4:4:4 HDMI output for crystal-clear video and audio
- USB-C input with up to 100W Power Delivery charging
- 3 USB ports (2x USB-A + 1x USB-C) supporting 10Gbps data transfer
- Integrated Gigabit Ethernet port for stable wired network connection
- EDID management via DIP switch (Pass, Force 1080p, User Define)
- USB power management with selectable constant or auto power mode
- Max. recommended cable length 5 meter: PROUSBCMMS5

	PART NO.
USB-C HUB for conference system	VLUSBCHUB4
	For more product info click here

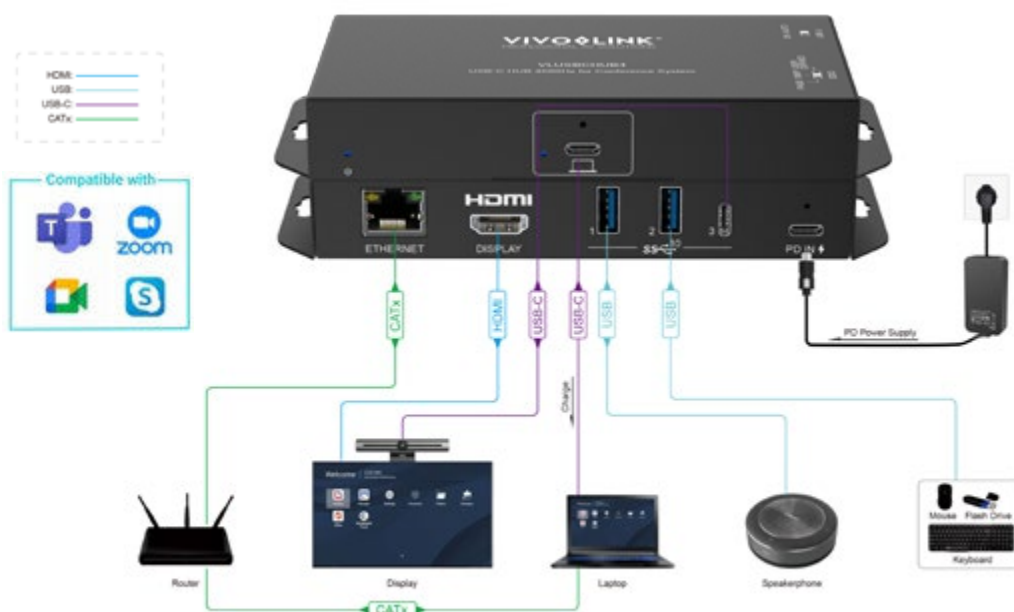

USB-C & HDMI KVM Presentation Switcher for Single Display



True one-cable-connect for conference rooms or TV carts

Professional USB-C & HDMI KVM switcher designed for meeting rooms and hybrid workspaces. Connect two source devices, share display, USB peripherals, and network – all through a single USB-C cable.

The Vivolink VLHUB21 is an 18G USB-C 2x1 KVM switcher designed for flexible meeting and workspace environments.

Easily switch between two source devices – one USB-C and one HDMI – while sharing a single display, USB peripherals, and wired network connection.

The USB-C input supports 60W charging and Ethernet, making it ideal for laptops and docking setups.

Built-in DIP switches allow easy control of EDID (Pass or Force 1080p) and USB Power Management (ON or AUTO).



With 3 USB 3.2 Gen1 ports and included 100W PD power supply, the VLHUB21 ensures stable performance and a clean installation for professional AV use.

- USB-C input supporting DP Alt-Mode and HDMI 2.0 input (18 Gbps) , HDCP 2.2 support
- 1x USB-C and 1x HDMI input with seamless auto or manual switching
- USB-C input supports 60W charging and Ethernet connectivity
- 3 USB 3.2 Gen1 ports (2x USB-A + 1x USB-C) sharing 3A total
- EDID management: Pass or Force 1080p mode
- USB device power management with selectable ON/AUTO
- Includes 100W USB-C PD power supply with locking screw
- Max. recommended cable length 5 meter: PROUSBCMMS5

PART NO.	
USB-C & HDMI KVM Presentation Switcher	VLHUB21
 For more product info click here	



USB-C cable for Laptop connection (HOST)

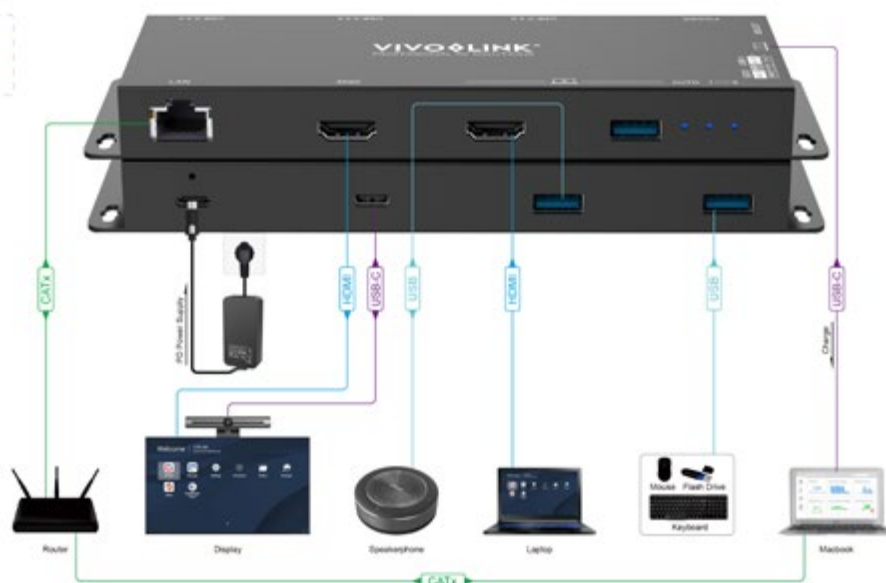

USB-C HUB with DisplayLink for Conference & Office Use



True one-cable connection for desks and meeting rooms

Supports the following formats: DisplayLink, DP Alt mode, DisplayPort

A versatile docking solution for both meeting rooms and everyday office setups. Mounted discreetly under the desk, it keeps the workspace tidy while providing full connectivity. Connect your laptop with a single USB-C cable for up to 100 W charging, dual 4K video, audio, and stable 1000 Mbps LAN. Four USB ports allow connection of cameras, microphones, soundbars, or other peripherals — all through one simple link.

- 1x host USB3.2 Gen2 connector for PC connection
- 2x HDMI output 4K@30Hz resolution
- 1x USB-A 3.0 input 10 Gbit (USB3.2 Gen2)
- 1x USB-C input 10Gbit (USB3.2 Gen2)
- 2x USB-A 2.0 input 480 Mbps
- 1x Audio out + 1 x Microphone input
- 1x Ethernet RJ45 Gigabit input
- 1x USB-C power input PD100W 20V5A
- Including a 100W charger that will fast charge the laptop (EU + UK power plug included)
- Max. recommended cable length 5 meter: PROUSBCMMS5

	PART NO.
USB-C HUB for Conference & Office Environments	VLUSBCHUB3
	For more product info click here



USB-C Power Injector

– 140W Charging Support



USB-C Power Injector enables high-power laptop charging from displays or devices that only provide low-wattage USB-C output. By adding a PD power source, it delivers up to 140W charging to the connected USB-C host while maintaining full data, video, and control functionality. The unit supports DP Alt Mode with 4K@60Hz 4:4:4 video passthrough and up to 10 Gb/s USB 3.2 Gen2 data transfer.

- Supports USB PD 3.1 protocol
- Injects up to 140W charging for the USB-C host device
- Switchable 15W power for USB-C out
- DP Alt Mode with 4K@60Hz 4:4:4 input and output
- Up to 10 Gb/s USB 3.2 Gen2 data transfer rate


Both USB-C ports feature a locking screw hole for secure installation.

Vivolink recommends using PROUSBCMMS cables for optimal stability.

Power requires an external USB-C PD charger (not included).

Recommended accessory: VLUSBCPWR100.

The injector occupies only one USB tier, ensuring compatibility in complex signal chains.

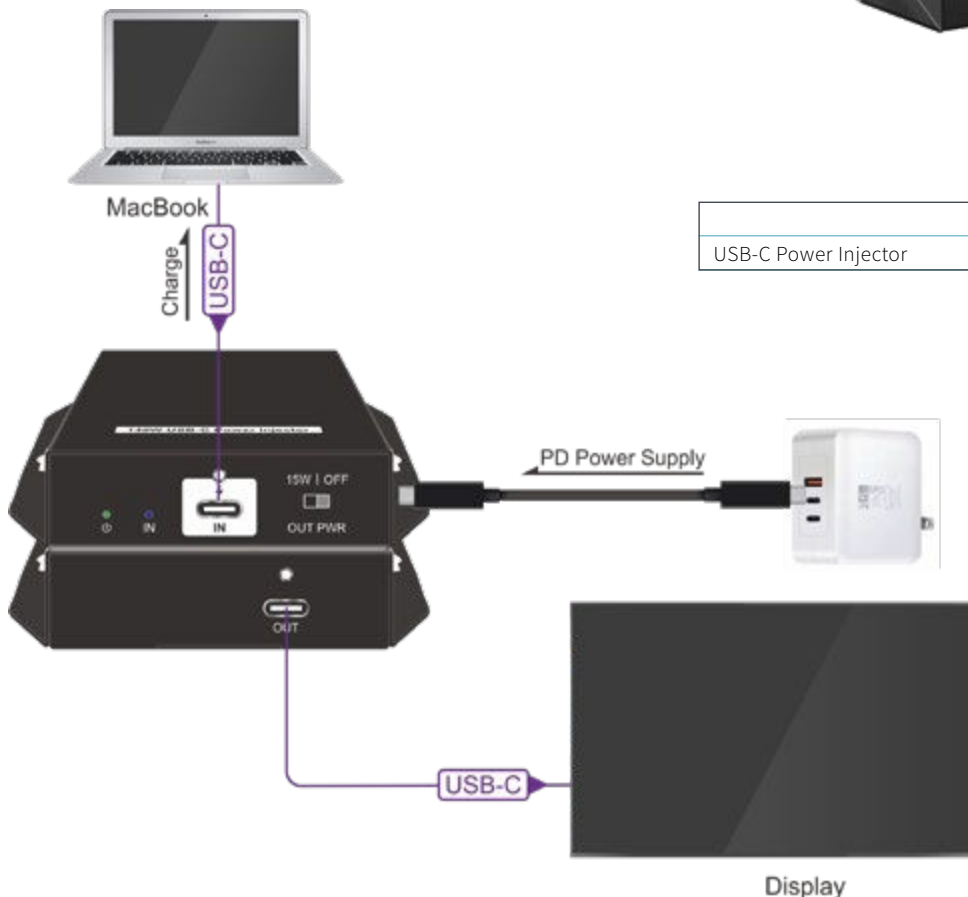

PART NO.	
USB-C Power Injector	VLUSBCPOWER
 For more product info click here	

USB-C Power Injector w/HDMI out supports up to 140W Charging

VLUSBCPOWER-H is a high-performance USB-C power injector designed to deliver full laptop charging even when the connected display or device provides insufficient USB-C power. When paired with a USB-C PD charger (not included), the injector supplies up to 140W of PD 3.1 charging to the host.


Recommended PD charger: VLUSBCPWR100.

The unit supports DP Alt Mode with 4K@60Hz 4:4:4 video and enables SST/MST, allowing dual-video output via USB-C and HDMI. This makes it ideal for setups requiring a second display signal directly from the injector. It delivers up to 10 Gb/s USB 3.2 Gen2 data performance and includes switchable power on USB-C OUT for flexible installation. **Both USB-C ports support secure mounting with locking-hole cables such as Vivolink PROUSBCMMS.**

The VLUSBCPOWER-H occupies only one USB tier, ensuring stable compatibility in complex signal chains.

- PD 3.1 with 140W injection
- DP Alt Mode with 4K@60Hz 4:4:4 video
- Supports SST/MST output
- USB-C with HDMI dual-video output
- Up to 10 Gb/s USB 3.2 Gen2 data rate
- Switchable USB-C OUT power
- USB-C input with locking-hole support

	PART NO.
USB-C Power Injector w/HDMI out	VLUSBCPOWER-H
	For more product info click here

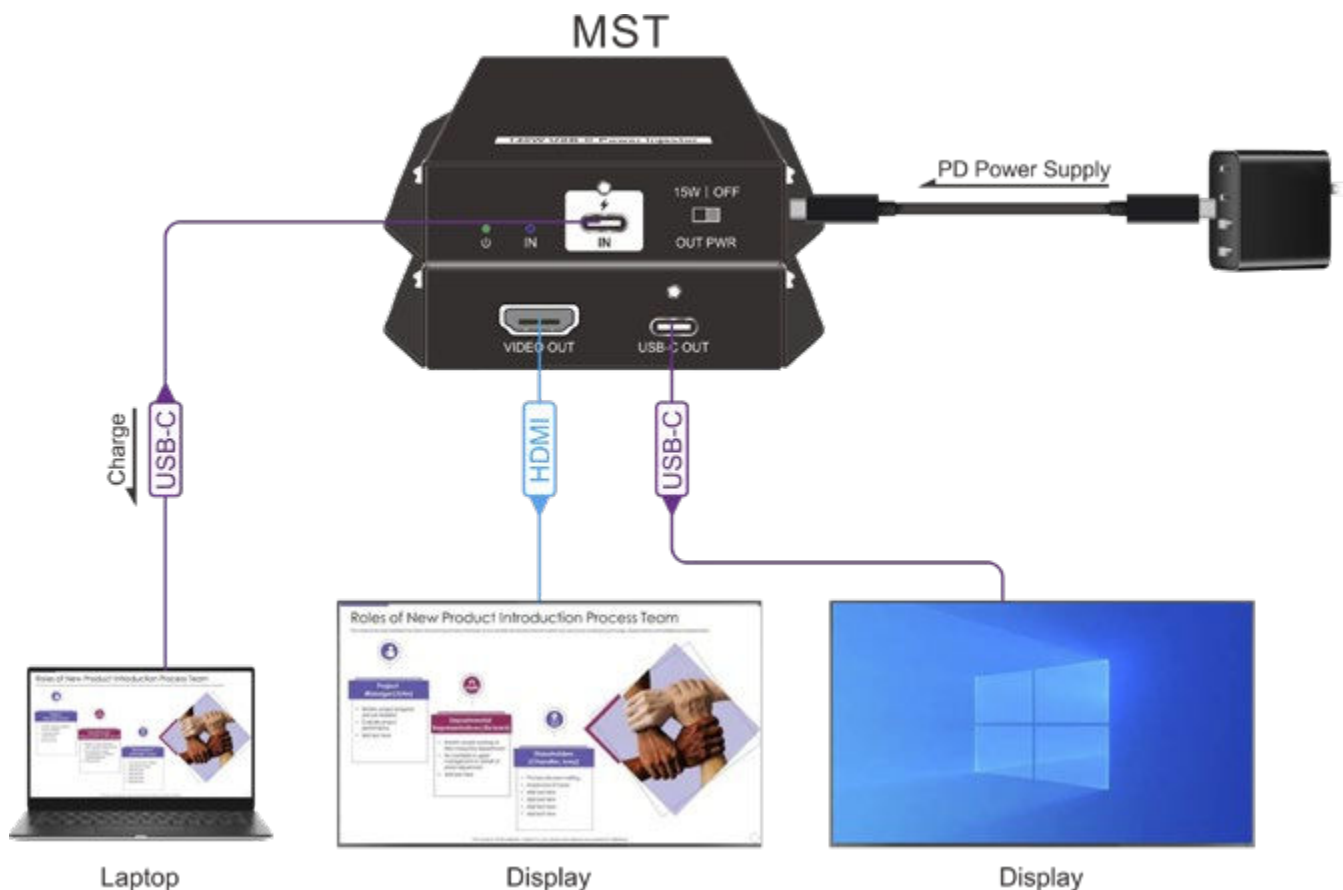

100W USB-C PD Power Supply incl. EU and UK power cable

4K
ULTRA HD

- Easy mounting under desk
- PD charge function for both MAC and PC's
- Variable charge power based in device connected

	PART NO.
USB-C 100W PD PSU	VLUSBCPWR100
	For more product info click here



USB-C KVM Extender

Extend USB-C signal up to 70m over CAT6A cable

The USB-C extender kit includes one transmitter and one receiver with HDMI output and 5 USB inputs.

	PART NO.
USB-C 4K Extender HUB 70m	VLUSBCEXT151
	For more product info click here

The USB-C input is an ideal AV interface for connecting laptop or Macbook with USB-C output.

The transmitter features:


- USB-C input for laptop/Macbook.
- USB-A input for desk speaker/microphone.
- USB-C power input 100W that can charge the connected laptop.
- HDBaseT output to receiver.
- Recommended PD charger: VLUSBCPWR100.

The receiver features:

- HDMI 4K@60Hz output
- HDBaseT input
- 4 USB 2.0 ports for connecting KVM devices such as: PTZ camera, webcam, touch screen, keyboard or mouse.

Supports the following formats: DP Alt mode, DisplayPort.

- 4x USB + 1 x USB-C supporting USB 2.0 transfer speed up to 300Mbps
- Supports HDMI 2.0b, 4K@60Hz 4:4:4, HDCP 2.3 compliant
- USB-C input supports 4K@60Hz 4:4:4 HDR10+
- USB-C 100W charge port + USB-A port on transmitter
- Supports bi-direction 24V PoC power supply
- 4K 70m transmission 18Gbit uncompressed

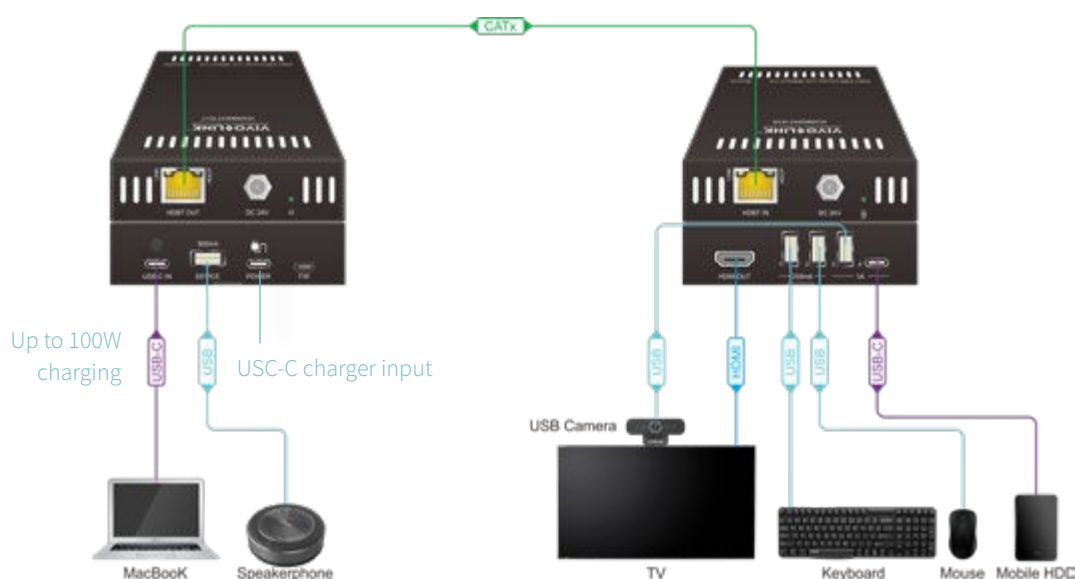

USB-C extension 100m presentation HUB for dual display



True one-cable-connect for conference rooms with two screens

Professional USB-C HUB Extender

Deliver robust, long-distance USB and video extension with this high-performance USB-C HUB. Extend USB 3.2 Gen 1 up to 100m over CAT6a with 5Gbps data rates, supporting dual 4K@60Hz HDMI outputs via integrated DisplayLink technology. Flexible switching (auto/manual), RS-232 pass-through, balanced/unbalanced audio de-embedding, and industrial FSYNC GPIO ensure seamless ProAV integration. Hardware acceleration guarantees stable transfer performance, while bi-directional 24V PoC reduces installation complexity by powering the system from either end. Future-proof with firmware updates via USB-C service port - a reliable choice for modern meeting spaces and demanding AV applications.


- Extension of USB 3.2 Gen 1 up to 100m/328ft via CAT6a cable
- USB 3.2 Gen 1 connectivity with data transfer rate up to 5Gbps
- Backwards compatible with USB 2.0 and 1.1
- Hardware acceleration for isochronous and bulk transfer
- Built-in DisplayLink technology for video over USB on dual HDMI outputs, with resolution up to 4K@60Hz
- TX supports auto switching and manual switching via switch button or API commands
- RX supports audio de-embedding to balanced/unbalanced analog output
- RS-232 pass-through and API control
- Firmware upgrade via USB-C service port
- FSYNC GPIO pass-through for industry camera use
- Bi-directional 24V PoC (power over cable), when TX or RX gets power, the other end does not need an external power supply

PART NO.
USB-C 100m Dual Display Hub
VLUSBCEXTX2
For more product info click here

Transmitter



Receiver

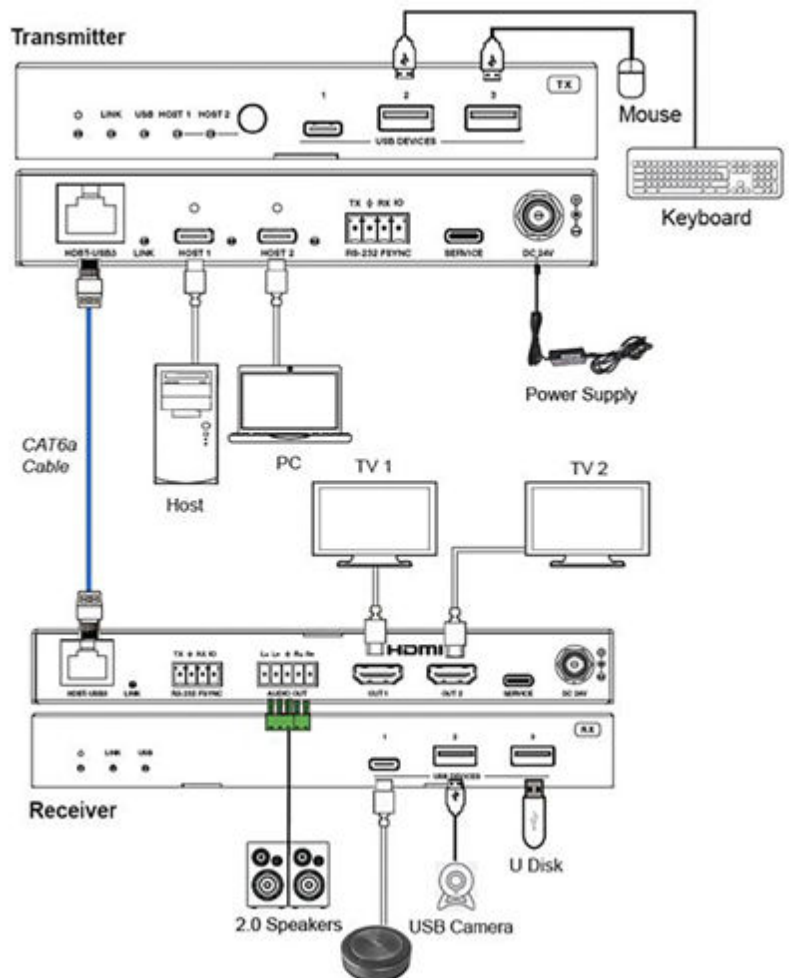

USB HUB Presentation Switcher

4K
ULTRA HD

Perfect for conference rooms


This switcher is designed to switch HDMI input or USB-C input to one HDMI output, including USB3.0 switch.

It supports video resolution up to 4Kx2K@60Hz 4:4:4 8bit, 1080P, and 3D. In addition, a smart built-in EDID setting can be selected by the 4-pin DIP switch on the front panel.

	PART NO.
USB HUB presentation switcher	VLHUB121-MME
	For more product info click here

- 18G 2x1 switcher with HDMI and USB-C inputs
- Supports automatic switching
- Supports HDMI 2.0, 4Kx2K@60Hz 4:4:4, HDR 10, Dolby Vision, HDCP 2.2
- Charging on USB-C port up to 40W
- Support USB data (USB 3.0/2.0) and 4K video transmission on USBC port
- Balanced analogue audio for audio de-embedding
- (USB 3.0/2.0) ports and automatically switched along with HDMI and USB-C input as USB DEVICES for corresponding HOST
- Front panel buttons trigger both CEC and RS232 commands for display control. (ON, OFF, MUTE, VOL+, VOL -)

6
MONTH
Free Swap
Warranty

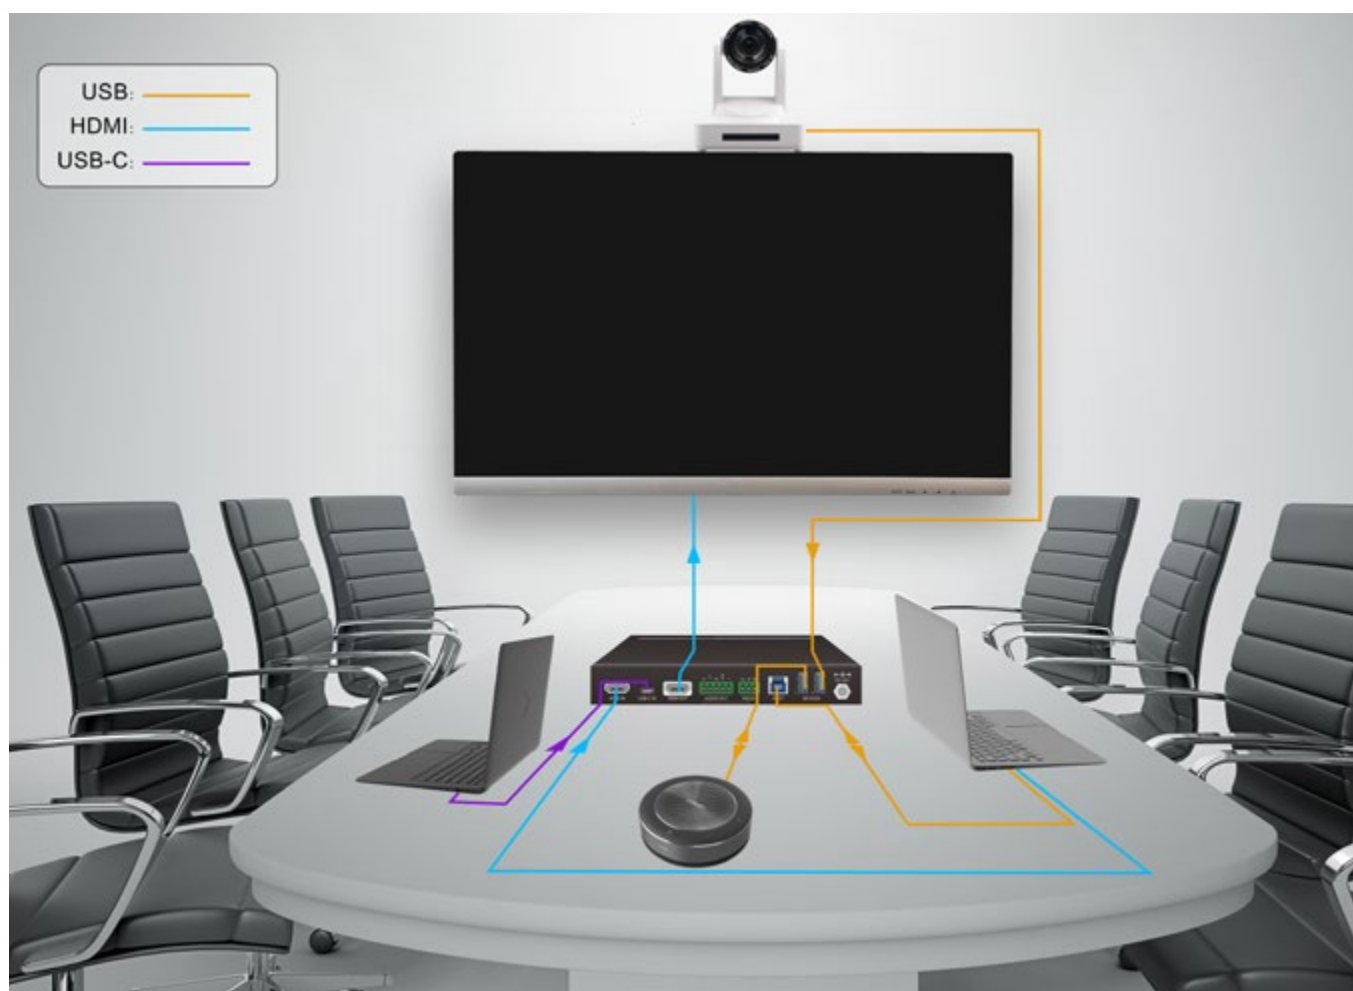

USB HUB Presentation Switcher + 100W charging

4K
ULTRA HD

Perfect for conference rooms


This switcher is designed to switch HDMI input or USB-C input to one HDMI output, including USB3.0 switch.

It supports video resolution up to 4Kx2K@60Hz 4:4:4 8bit, 1080P, and 3D. In addition, a smart built-in EDID setting can be selected by the 4-pin DIP switch on the front panel. Can be controlled via TCP/IP and RS232



	PART NO.
USB HUB presentation switcher	VLHUB221
	For more product info click here

- USB-Supports 100 W Charging via USB-C charge port (100w charger not included in package)
- Recommended PD charger: VLUSBCPWR100
- 18G 2x1 switcher with HDMI and USB-C input
- Automatic switching by detecting 5V or TMDS
- Supports HDMI 2.0, 4Kx2K@60Hz 4:4:4, HDR 10, Dolby Vision, HDCP 2.2
- USB Device supply up to 5V1.7A on each port
- Smart guest control
- Smart EDID and HDCP management
- Controlable via buttons, RS232 and IP
- Support USB data (USB 3.0/2.0) and 4K video transmission on USB-C port
- Balanced analogue audio for audio de-embedding
- (USB 3.0/2.0) ports and automatically switched along with HDMI and USB-C input as USB DEVICES for corresponding HOST
- Front panel buttons trigger both CEC and RS232 commands for display control. (ON, OFF, MUTE, VOL+, VOL -)

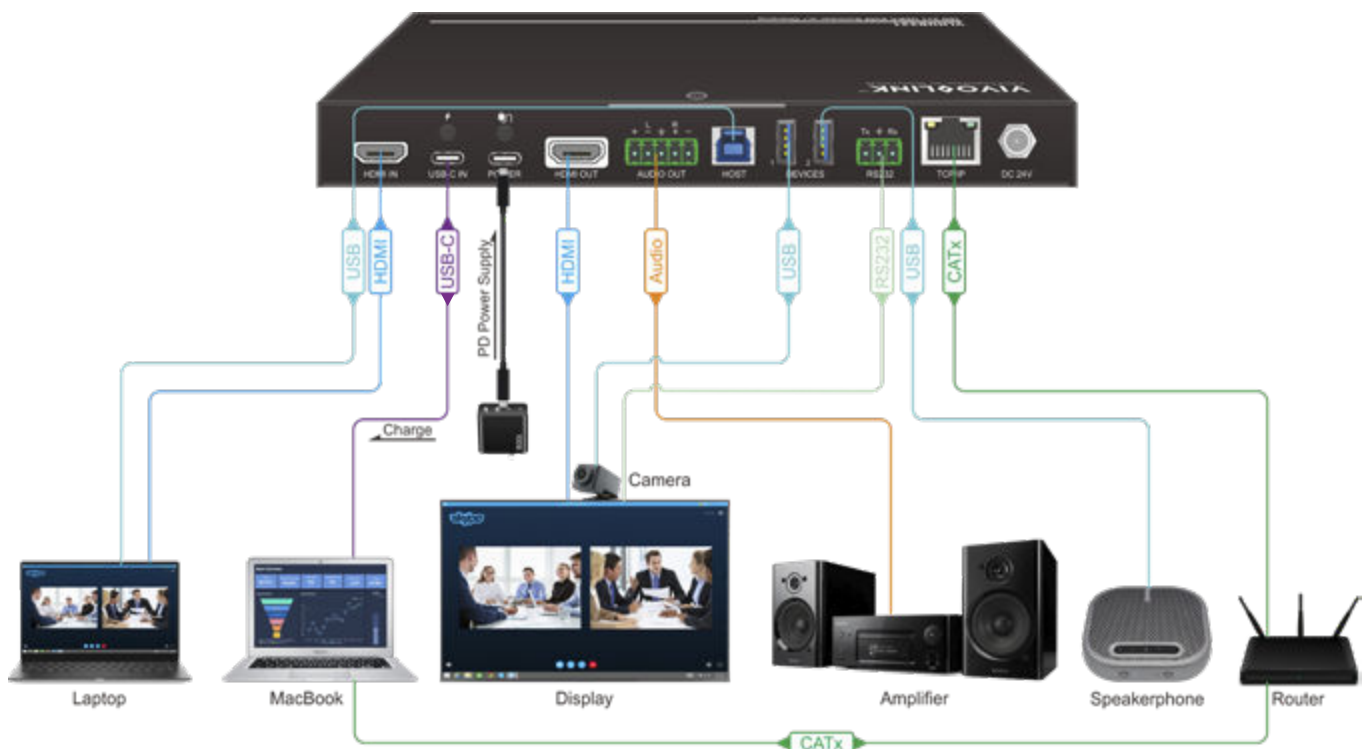

USB-C & USB-A Display Adapter 4K



Perfect for conference rooms


Bring your professional visuals to life with the Vivolink USB-C Dual 4K HDMI Adapter — your reliable partner for crystal-clear video performance. Whether you're driving two ultra-high-definition displays in a corporate conference room, extending your digital signage across large spaces, or boosting productivity at a home office, this adapter delivers up to dual 4K@60Hz resolution thanks to advanced DisplayLink DL6950 technology.

Designed to fit seamlessly into any setup, it features a hybrid tethered cable with an integrated USB-C to USB-A adapter, so you can connect with both modern USB-C laptops and older USB-A models without hassle. When paired with Vivolink USB 3.0 extenders, you can even achieve long-distance video signal transmission, opening up endless possibilities for AV installations in meeting rooms, education, or hospitality environments.

Professional, flexible, and built to perform — the Vivolink Dual 4K HDMI Adapter takes your visuals further.

- Dual 4K@60Hz Output – Supports two simultaneous 4K UHD displays via HDMI with DisplayLink DL6950 for exceptional clarity and performance.
- Cross-Platform Compatibility – Works seamlessly with Windows, macOS, ChromeOS, and Android devices for maximum flexibility.
- USB-C / USB-A Hybrid Connectivity – Integrated tethered cable with USB-C to USB-A adapter supports both legacy and modern laptops.
- Plug-and-Play Simplicity – No complicated setup; enjoy a smooth, driver-friendly experience for professional video expansion.

	PART NO.
Display Adapter 4K	VLUSB3HDMIX2
	 For more product info click here

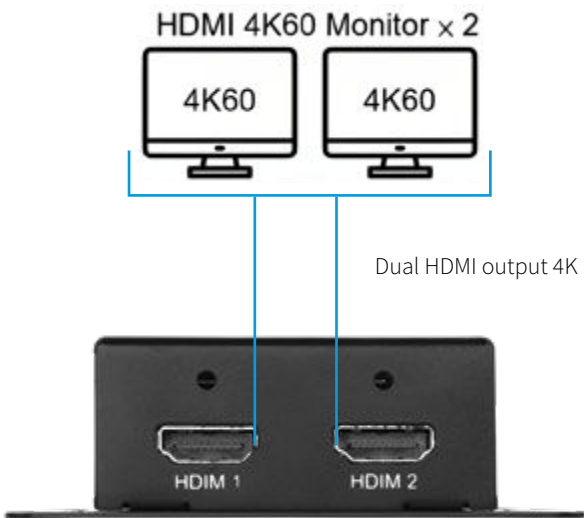

Rear view



USB-A or USB-C



USB 3.0 Extender Kit – 100m (4-Port)


The Vivolink VLUSB3EXT100 is a high-performance USB extender kit consisting of a transmitter (Tx) and receiver (Rx). It allows you to extend up to four USB 3.2 Gen1 devices—such as cameras, touchscreens, speakers, or keyboards—up to 100 meters using a single CAT5e/6/7 cable.

- Extends USB 3.2 Gen1 signals up to 100m over standard CAT6A cabling
- 4x USB-A outputs (2x 5V 1.5A + 2x 5V 1A)
- Data transfer rate up to 5 Gbit/s
- Backwards compatible with USB 2.0 and 1.1
- Supports a wide range of peripherals: cameras, mouse, keyboard, speaker, etc.
- Plug-and-play – no drivers required
- Compatible with Windows, macOS, and Linux

Typical use case:

Designed for meeting rooms and professional AV installations, where USB devices need to be located far from the host computer.

	PART NO.
USB 3.2 Port Extender Kit 100m	VLUSB3EXT100
	 For more product info click here

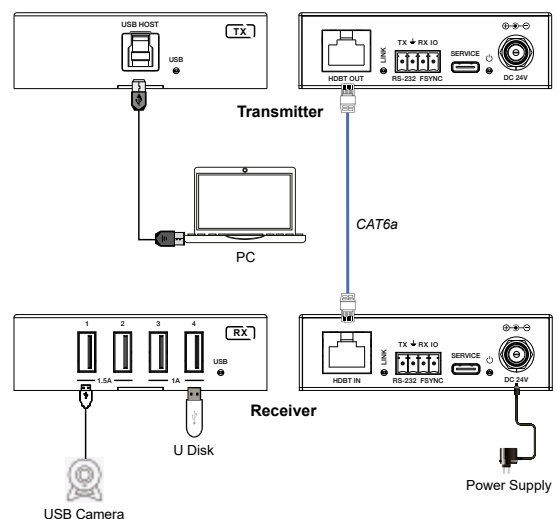

USB3 2x6 Port Extender 100m via Ethernet Cable

Ideal for meeting rooms with several USB devices like camera, speaker, touch screen, etc.

The VLUSB3EXT100 extender is based on HDBaseT 3.0 and support 5Gbit speed (Rx) that can connect up to 4 USB devices supporting 5Gbit speed. Ideal for PTZ camera and other super speed devices.

Transmitter (Tx)



Receiver (Rx)

	PART NO.
USB3.0 4-Port Receiver	VLUSB3EXT100D

	PART NO.
USB3.0 4-Port Host Transmitter	VLUSB3EXT100H

For more product info [click here](#)

Typical installation:


Meeting rooms with many USB3.0 devices. It has four USB ports that can extend USB 3.0 signal up to 100 metres over a CAT6a/7 cable. The transmitter is powered by the computer and the power supply is at the remote receiver that helps provide sufficient power to any type of USB device, such as flash drives, keyboards, mice, cameras, or printers, etc.

Transmitter (TX):

- USB-C & USB-B auto switching
- Supports 100m extension
- Supports two way PoC & PoC control
- RS232 configurable for control & pass through
- 2 USB-A for multiple devices

Receiver (RX):

- Supports 4 devices with 1 USB-C
- Supports 100m extension
- Supports 3A, max 1.7A one port
- Supports two way PoC & PoC control
- RS232 configurable for control & pass through

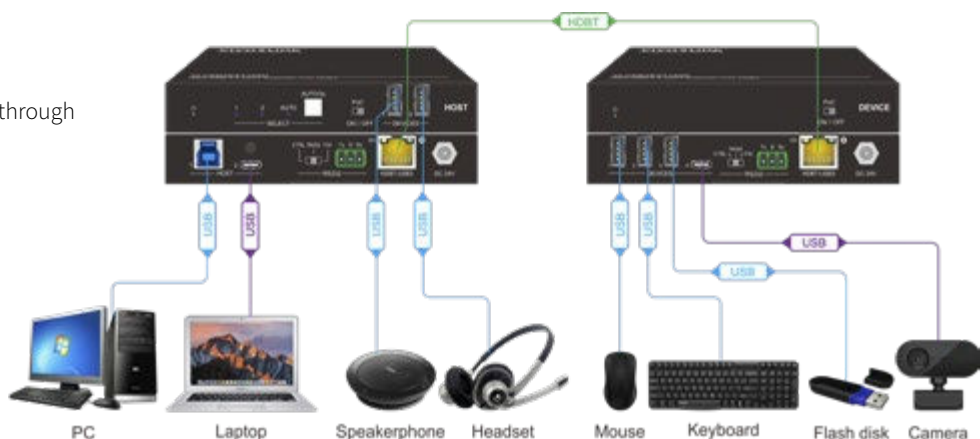

TRANSMITTER (TX)	
Host Connector	(1) Type-B USB (1) USB Type-C
Devices Connector	(2) USB Type-A
Devices Power	5V 500mA total
USB Version	USB 3.2 Gen1
CONTROL PART	
Control	(1) Button, (1) RS232, (1) DIP switch
Control Connector	(1) White Button, (1) 3-pin terminal block, (1) 2-pin DIP switch
GENERAL	
Transmit Distance	Up to 100m with CAT6A cable
Data Rate	5Gbps
Operation Temperature	-10°C ~ +55°C
Storage Temperature	-25°C ~ +70°C
Relative Humidity	10% ~ 90%
External Power Supply	DC 24V 1.5A

RECEIVER (RX)	
Devices Connector	(3) USB Type-A (1) USB Type-C
Devices Power	Devices share 3A current limit; Single port power supply maximum limit 1.7A.
USB Version	USB 3.2 Gen1
CONTROL PART	
Control	(1) RS232 (1) DIP switch
Control Connector	(1) 3-pin terminal block (1) 2-pin DIP switch
GENERAL	
Transmit Distance	Up to 100m with CAT6A cable
Data Rate	5Gbps
Operation Temperature	-10°C ~ +55°C
Storage Temperature	-25°C ~ +70°C
Relative Humidity	10% ~ 90%
External Power Supply	DC 24V 1.5A

HDMI Extender Overview

Vivolink offers a complete range of HDMI extenders – from cost-efficient IP solutions to professional long-distance fiber systems.

The portfolio covers everything from HDMI over IP with up to 120m @ 1080p, ideal for distributing one source to many displays in sports bars, entertainment venues or info screens, to fiber extenders reaching up to 300m (multi-mode) or even 2 km (single-mode) in true uncompressed 4K@60Hz 4:4:4 HDR quality – perfect for demanding auditoria, broadcast or control rooms.

In between, our HDBaseT series delivers professional performance for meeting rooms, conference spaces and education environments. Options include models with IR, RS-232, two-way PoC, zero latency and premium versions with ARC, audio breakout and Dolby Vision support.

With Vivolink HDMI extenders you can always find the right balance of distance, resolution and functionality – ensuring stable, professional AV installations at any scale.

Vivolink keeps your system running

If you face any problems with your Vivolink product, we immediately send you a new one. No need to wait for a faulty product to be repaired. This is part of our **Premium Professional Service**.

6
MONTH
Free Swap
Warranty



RESOLUTION	4K@60Hz 4:4:4	Up to 4K@60Hz 4:4:4	Up to 4K@60Hz 4:2:0	Up to 4K@60Hz 4:2:0	Up to 4K@60Hz 4:2:0	Up to 4K@60Hz 4:2:0	Up to 4K@60Hz 4:4:4
DISTANCE	300m	70m/4K 40m	100m/4K 70m	70m/4K 40m	70m/4K 40m	70m/4K 40m	60m
PART NUMBER	VLHDMIEXTFIB	VLHDMIEXTHDB2.0	VLHDMIEXT422	VLHDMIEXT416	VL120016	VL120007	VLHDMIEXT60
TRANSMISSION SPEED	18 Gbps	18 Gbps	10.2 Gbps	10.2 Gbps	10.2 Gbps	10.2 Gbps	18 Gbps
AUDIO FORMAT SUPPORTED	PCM, Dolby Digital, DTS, DTS-HD	PCM, Dolby Digital, DTS, DTS-HD	PCM, Dolby Digital, DTS	PCM, Dolby Digital, DTS	PCM, Dolby Digital, DTS	PCM, Dolby Digital, DTS	PCM, Dolby Digital, DTS
IR CONTROL BI-DIRECTIONAL	x	x	x	x	x	x	
RS-232 CONTROL BI-DIRECTIONAL	x	x	x	x	x		
HDCP 1.4 & 2.2 COMPLIANT	x	x	x	x	x	x	x
EDID PASS THROUGH	x	x	x	x	x	x	x
TRANSMISSION FORMAT	Optical fiber	HDBaseT	HDBaseT	HDBaseT	HDBaseT	HDBaseT	HDMI DSC
TRANSMISSION CONNECTOR	OM3/OM4 multi-mode fiber	RJ45	RJ45	RJ45	RJ45	RJ45	RJ45
SIGNAL LATENCY	-	-	-	-	-	-	-
POWER OVER CABLE	-	Two-way PoC	Two-way PoC	Two-way PoC	One-way PoC	One-way PoC	Two-way PoC
AUDIO DE-EMBEDDER IN SENDER UNIT. TWO RELAYS IN RECEIVER UNIT.				x			

HDMI Extenders

HDMI 2.0 4K Fiber Extender



	PART NO.
HDMI fiber extender	VLHDMIEXTFIB
Infrared sender and receiver kit	VL120024

For more product info [click here](#)

True 4K uncompressed HDMI Extender up to 300m IR + RS-232 control. VLHDMIFIB is a slim size HDMI extender using two single mode or OM3/OM4 multi-mode fiber cables.

The extender set consists of a Transmitter and a Receiver and is designed to extend HDMI signal (Max 4K@60Hz 4:4:4) up to 300m.

The extender set supports bi-directional IR and RS232 control signal + ARC via the fiber cable.

- Supports HDMI2.0, HDCP2.2 compliant
- Supports 4K@60Hz 4:4:4
- Supports HDR
- Bi-directional IR and RS232 pass-through
- Supports ARC
- Transmission distance: up to 300m

GENERAL

Resolution	Up to 4K 60Hz 4:4:4 HDR
Audio Format	PCM, Dolby Digital, DTS, DTS-HD
Standard	HDMI2.0 & HDCP2.2 compliant
Transmission Distance	≤300m via single mode or OM3/OM4 multi-mode fiber cables
Operation Temperature	0°C~+40°C
Storage Temperature	-10°C~+55°C
Relative Humidity	10%~90%
Power Supply	Input: AC 100~240V, 50/60Hz; Output: 12VDC 1A
Power Consumption	9W (max)
Dimension (W*H*D)	130mm x 20mm x 84mm
Net Weight	175g


TRANSMITTER

Input	(1) HDMI IN
Input Connector	(1) Type A Female HDMI
Output	(2) OPTICAL OUT; (1) AUDIO OUT
Output Connector	(2) LC Connector MM; (1) Toslink Connector
Control	(1) IR IN; (1) IR OUT; (1) RS232
Control Connector	(2) 3.5mm Minijacks; (1) 3-Pin phoenix connector

RECEIVER

Input	(2) OPTICAL IN; (1) AUDIO IN
Input Connector	(2) LC Connector MM; (1) Toslink Connector
Output	(1) HDMI OUT
Output Connector	(1) Type A Female HDMI
Control	(1) IR IN; (1) IR OUT; (1) RS232
Control Connector	(2) 3.5mm Minijacks; (1) 3-Pin phoenix connector

Optical fiber Multi Mode

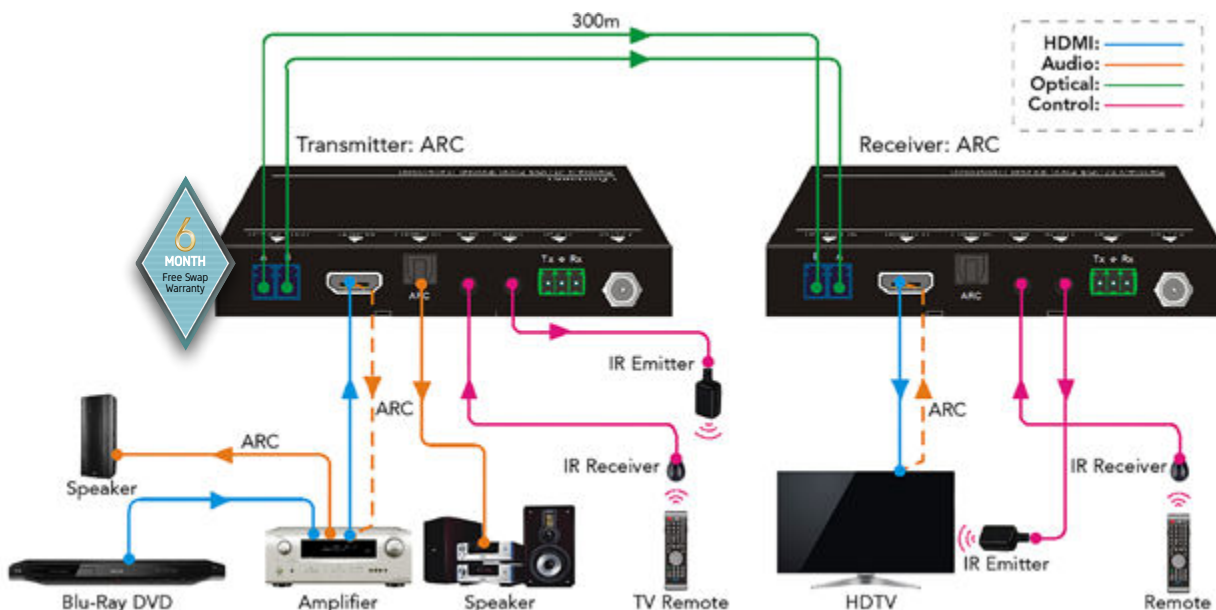

HDMI 2.0 Extender, 18Gbit slim 4K with IR + RS-232 control



	PART NO.
HDMI extender, slim 4K with IR + RS232 control	VLHDMIEXTHDB2.0
Infrared sender and receiver kit	VL120024



For more product info [click here](#)

The VLHDMIEXTHDB2.0 is an ultra-thin HDMI2.0 Extender consisting of transmitter and receiver.

It extends 1080p/4K HDMI signal over CAT5e/CAT6a cable up to 70m/40m (PoC), and enables IR and RS232 pass-through to control source or display device.

It also adopts a visually lossless video compression technology (VLC) to ensure the HD lossless transmission of HDR and 4K@60Hz/4:4:4 over CAT5e/CAT6a cable.

- Supports 4K/UHD/60Hz/4:4:4
- Supports HDMI2.0 & HDCP2.2. Backward compatible with previous versions
- Maximum transmission distance is up to 40m for 4K and 70m for 1080p
- High bandwidth: 18Gbps
- Supports CEC, IR and RS232 pass-through for long-distance control
- Supports bi-directional PoC for simplified wiring
- Supports HDR
- Features DIP switch for choosing mode: Control, Update A, Update B

GENERAL


Transmission mode & distance	HDBaseT; 1080p ≤ 70m; 4K ≤ 40m
Resolution	Up to 4K@60Hz 4:4:4
Bandwidth	18Gbps
HDMI standard	HDMI2.0 & HDCP2.2
Power consumption	14W (max)
Operation temperature	0°C~+40°C
Storage temperature	-10°C~+50°C
Relative humidity	0%~90%
External power supply	Input: 100VAC~240VAC, 50/60Hz; Output: 12VDC 2A
Dimension (W*H*D)	115mm x 16 mm x 84mm
Net weight (g)	Transmitter: 150g; Receiver: 153g

TRANSMITTER

Input	HDMI IN
Output	HDBT OUT
Control ports	IR IN, IR OUT, RS232

RECEIVER

Input	HDBT IN
Output	HDMI OUT
Control ports	IR IN, IR OUT, RS232

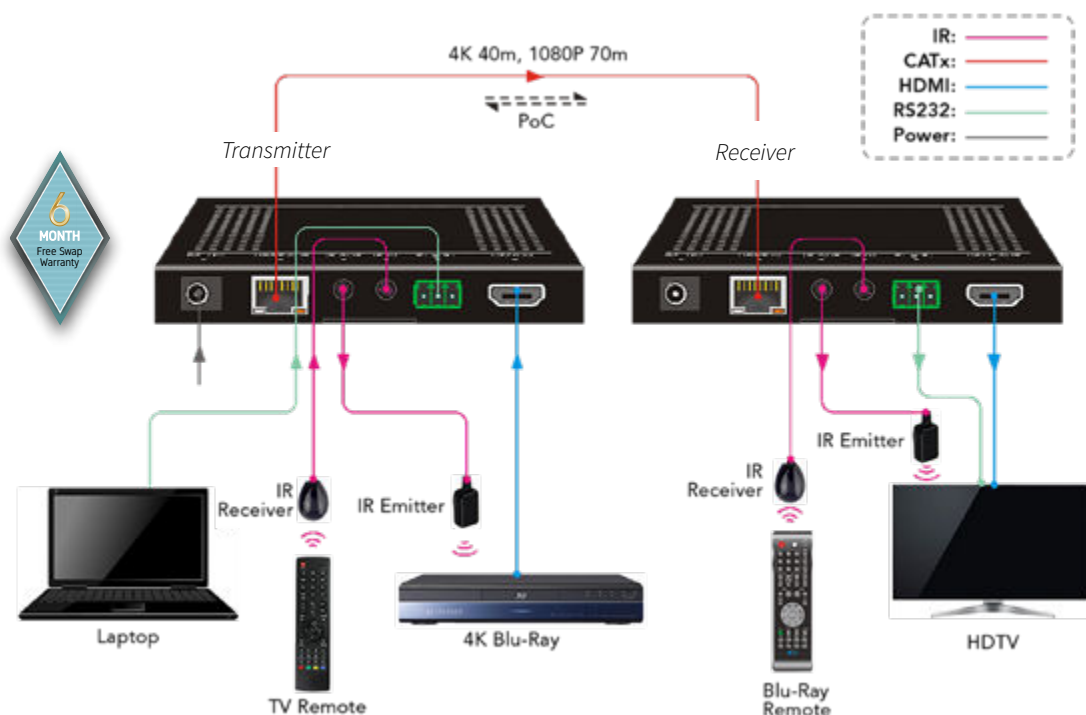

HDBaseT Extender Kit HDMI 2.0 18Gbps /w Audio Breakout



PART NO.	
HDMI extender, slim 4K with IR + RS232 control and audio breakout	VLHDMIEXTHDB2.0S
Infrared sender and receiver kit	VL120024



For more product info [click here](#)

The Vivolink VLHDMIEXTHDB2.0S is a professionalgrade HDBaseT extender kit Extender consisting of transmitter and receiver and designed for highperformance AV distribution. Building on the proven performance of the VLHDMIEXTHDB2.0, this enhanced edition introduces analog audio breakout and automatic video upscaling, adding extra flexibility to modern AV installations.

It transmits uncompressed 4K@60Hz (4:4:4) signals up to 40 meters or 1080p signals up to 70 meters using a single Cat6a cable. With built-in test patterns, ARC support, and two-way PoC, it is ideal for environments that demand stable and intelligent AV extension.

- Supports HDMI 2.0, HDCP 2.2 (Active/Passive), and CEC
- Long-distance transmission: up to 70m @1080p or 40m @4K60Hz (4:4:4)
- Integrated analog audio breakout (3.5mm jack on receiver)
- Automatic video upscaling from 1080p input to 4K output
- Two-way PoC (Power over Cable) – single power supply needed
- EDID management via 4-pin DIP switch
- Bi-directional IR and RS232 passthrough
- Built-in test pattern generator (4K and 1080p) for troubleshooting

GENERAL


Transmission mode & distance	HDBaseT; 1080p ≤ 70m; 4K ≤ 40m
Resolution	Up to 4K@60Hz 4:4:4
Bandwidth	18Gbps
HDMI standard	HDMI2.0 & HDCP2.2 (HDCP1.4 Compliant)
Power consumption	12W (max)
Operation temperature	-5°C~+55°C
Storage temperature	-25°C~+70°C
Relative humidity	10%~90%
External power supply	Input: 100VAC~240VAC, 50/60Hz; Output: 24VDC 1,25A
Dimension (W*H*D)	140mm x 19,5 mm x 84mm
Net weight (g)	Transmitter: 275g; Receiver: 290g

TRANSMITTER

Input	HDMI IN
Output	HDBT OUT
Control ports	IR IN, IR OUT, RS232
ARC Audio Out	Toslink Connector

RECEIVER

Input	HDBT IN
Output	HDMI OUT
Control ports	IR IN, IR OUT, RS232
ARC Audio In	Toslink Connector

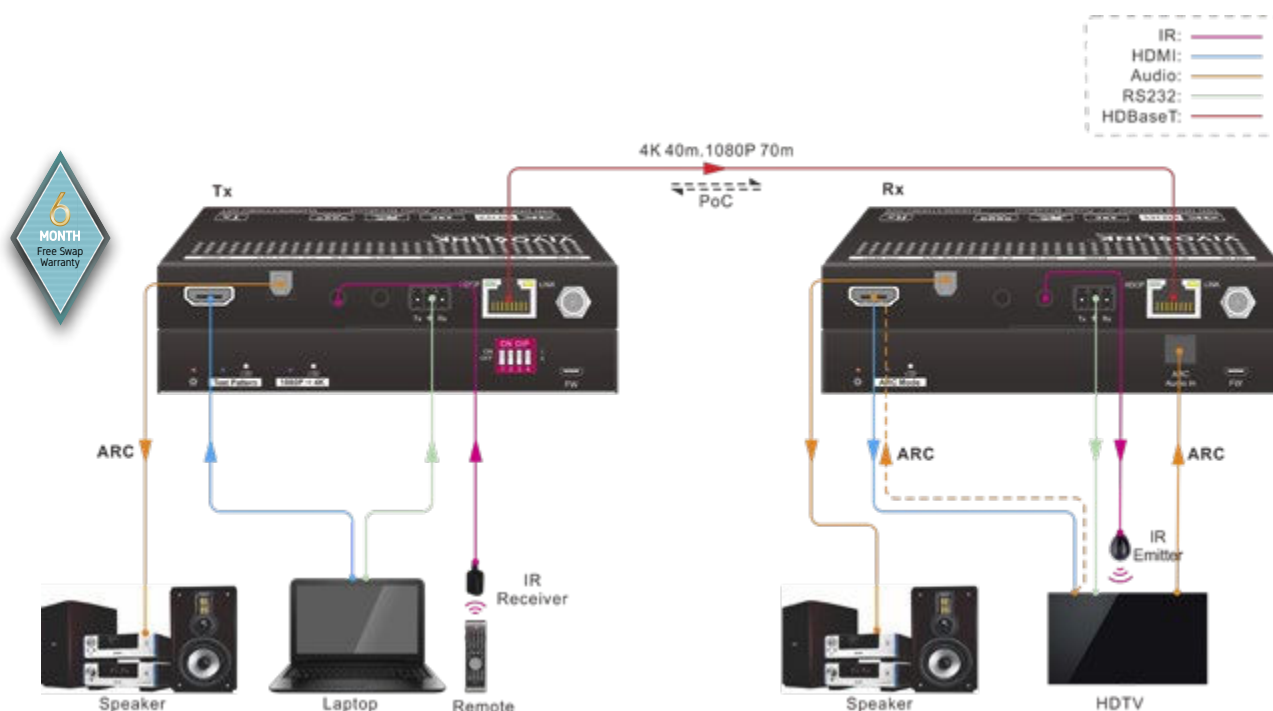

HDMI Extender, 100m with Ethernet + IR + RS-232 control



	PART NO.
HDBaseT extender kit 100m	VLHDMIEXT422
Infrared sender and receiver kit	VL120024



For more product info [click here](#)

The VLHDMIEXT422 is an ultra-thin 100m HDMI2.0 Extender consisting of a transmitter and a receiver.

It extends 1080p/4K HDMI signal over CAT6a cable up to 100m/70m (PoC), and enables IR and RS232 pass-through to control source or display device remotely.

- Ultra-thin design
- The highest resolution is 4K/30Hz
- HDCP2.2 compliant.
- Maximum transmission distance is up to 70m for 4K
- Maximum transmission distance is up to 100m for 1080p
- Maximum extension distance is up to 100m for Ethernet
- Two-way PoE (can be powered from both ends)
- High bandwidth:10.2Gbps
- Support IR/RS232 passthrough
- Use HDBaseT technology
- LED indicators show work status

GENERAL

Transmission mode & distance	HDBaseT; 1080p ≤ 100m; 4K ≤ 70m
Resolution	Up to 4K@60Hz 4:2:0
Bandwidth	10.2Gbps
HDMI standard	HDMI1.4a & HDCP2.2
Power consumption	10W (max)
Operation temperature	0°C~+50°C
Storage temperature	-10°C~+50°C
Relative humidity	0%~90%
External power supply	Input: 100VAC~240VAC, 50/60Hz; Output: 24VDC 1.25A
Dimension (W*H*D)	152mm x 16 mm x 84mm
Net weight (g)	Transmitter: 186g; Receiver: 196g

TRANSMITTER

Input	HDMI IN
Output	HDBT OUT
Control ports	IR IN, IR OUT, RS232


RECEIVER

Input	HDBT IN
Output	HDMI OUT
Control ports	IR IN, IR OUT, RS232

Transmitter



Receiver

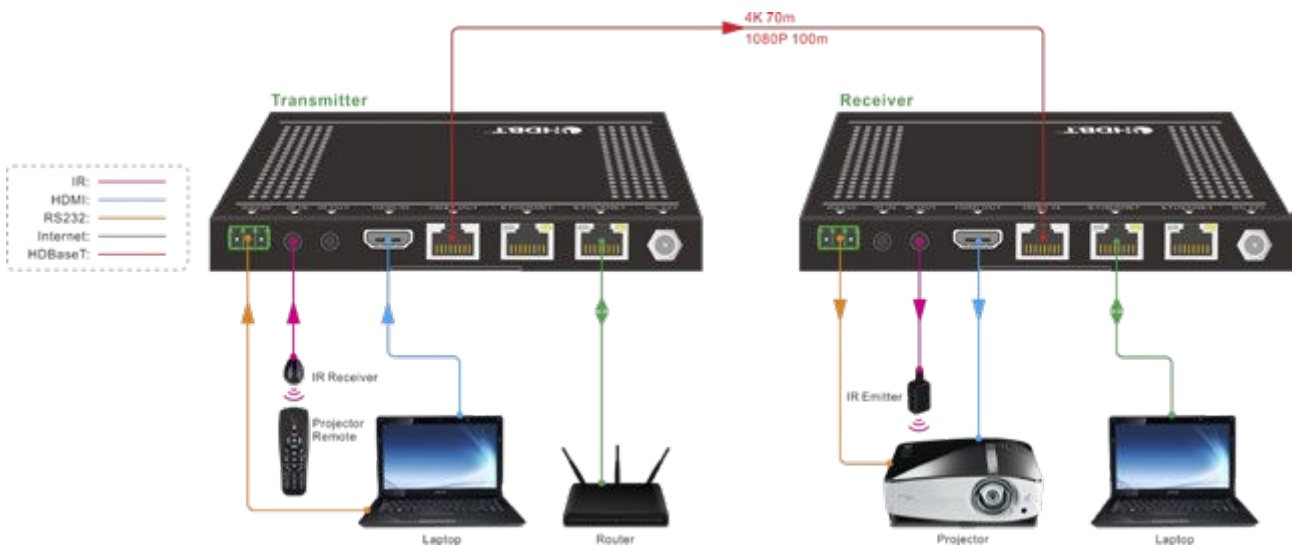

HDMI Extender 4K with Relay



Screen relays, 2-way PoC and Audio de-embedder.

	PART NO.
HDBaseT extender kit (TX & RX)	VLHDMIEXT416

For more product info [click here](#)



VLHDMIEXT416 is an HDMI HDBaseT extender kit that makes installation in meeting rooms easy.

Simply connect projection screen to receiver unit and programme screen up/down via RS232 codes.

With audio de-embed function on transmitter, it is easy to extract the audio to an external audio system.

- 4K HDMI Extender set
- HDMI 1.4 (4K@60Hz 4:2:0), HDCP 2.2
- HDBT extension up to 1080P@70m & 4K@40m
- Relay control to projection screen
- Audio de-embedded on Tx
- CEC pass-through
- Two-way PoC

GENERAL


Transmission mode & distance	HDBaseT; 1080p ≤ 70m; 4K ≤ 40m
Resolution	Up to 4K@60Hz 4:2:0
Bandwidth	10.2Gbps
HDMI standard	HDMI2.0 & HDCP2.2
CEC	Pass-through
SPDIF & L+R out	Input audio is de-embedded at Tx
Relay	2x Relay output at Rx for screen control
PoC	2 way PoC
Operation temperature	0°C~+40°C
Storage temperature	-10°C~+50°C
Relative humidity	0% ~ 90%
External power supply	Input: 100VAC~240VAC, 50/60Hz; Output: 12VDC 2A
Dimension (W*H*D)	130mm x 19.5 mm x 84.4mm
Audio terminals	SPDIF & L+R out
Relay output	For projector screen control
Control ports	IR IN, IR OUT, RS232

TRANSMITTER

Input	HDMI IN
Audio terminals	SPDIF & L+R out
Control ports	IR IN, IR OUT, RS232

RECEIVER


Output	HDMI OUT
Relay output	For projector screen control
Control ports	IR IN, IR OUT, RS232

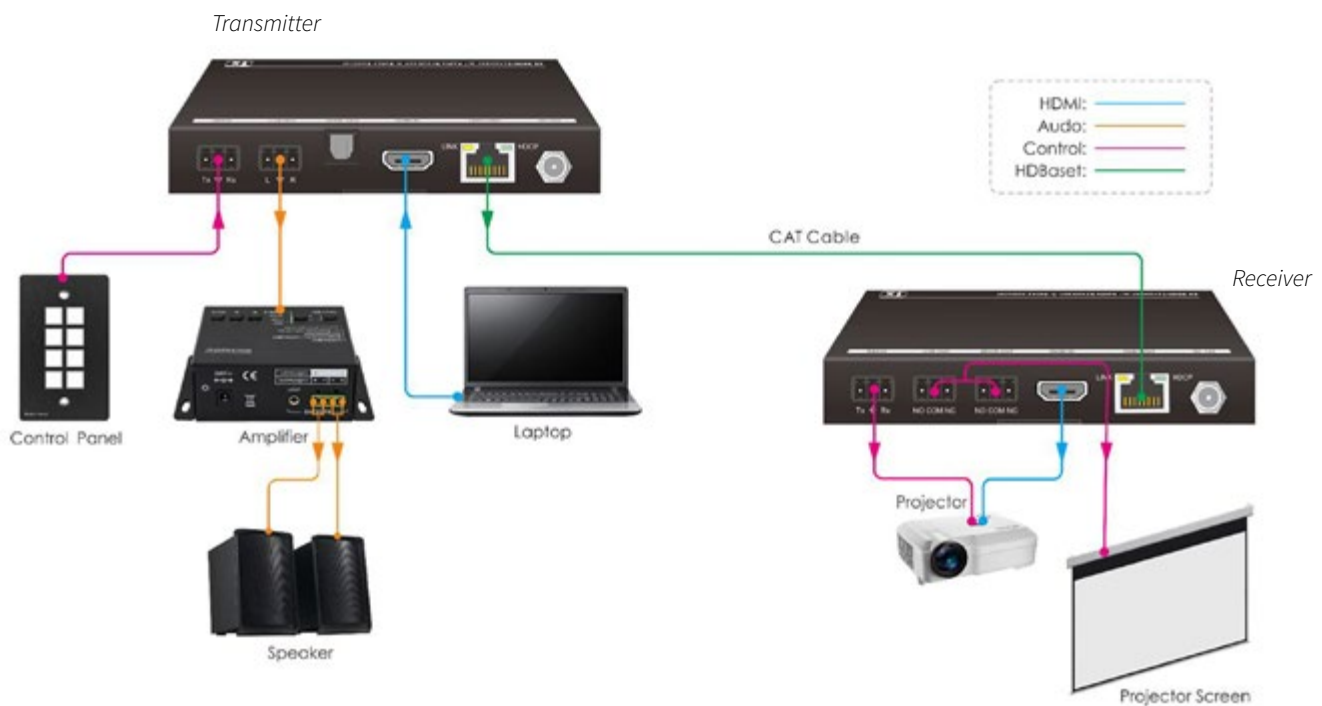

HDMI Extender slim 4K with IR + RS-232 control



VL120016 is a mini-size HDBaseT Extender set that consists of a transmitter (VL120016T) and a receiver (VL120016R), supporting 1080P/ 4K signal transmission up to 131ft (40m), 1080P signal up to 230ft (70m) over single CAT5e/6 cable. VL120016 supports CEC, bidirectional RS232 & IR control, and uni-directional PoH function.

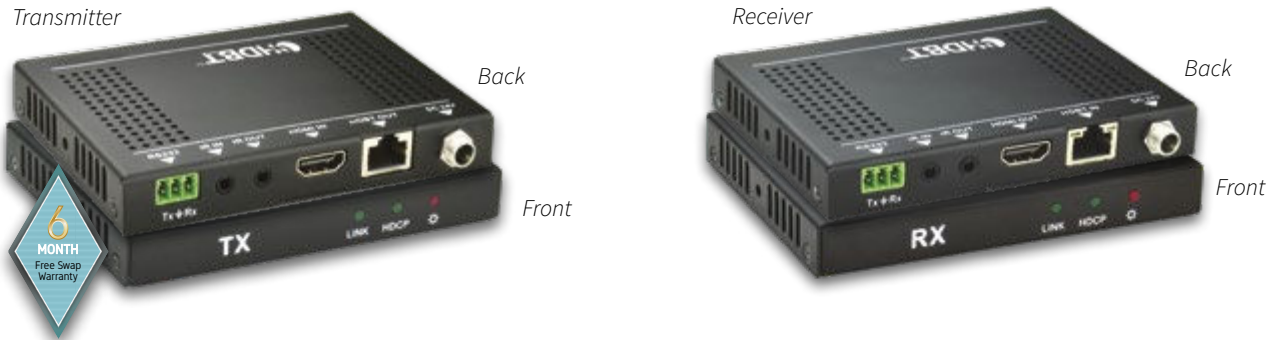


	PART NO.
HDBaseT extender kit (Tx & Rx)	VL120016
HDBaseT receiver (Rx only)	VL120016R
HDBaseT transmitter (Tx only)	VL120016T
Power supply for receiver unit (optional)	VL120016R-PSU
Infrared sender and receiver kit	VL120024

For more product info [click here](#)

- Supports 4K@60Hz 4:2:0 video signal transmission
- Max transmission distance: 4K 131ft (40m) and 1080P 230ft (70m) over single CAT6a cable
- High bandwidth: 10.2Gbps
- Compliant with HDMI & HDCP1.4
- Uses HDBaseT technology for extended capability and reliability
- Supports ARC
- Bi-directional IR pass-through

Input (VL120016T)	1xHDMI (female), 1xIR (3.5 minijack), 1xRS232 (3 pin captive screw connector)
Output (VL120016T)	1xHDBT (RJ45), 1xIR (3.5 minijack), 1xRS232 (3 pin captive screw connector)
Input (VL120016R)	1xHDBT (RJ45), 1xIR (3.5 minijack), 1xRS232 (3 pin captive screw connector)
Output (VL120016R)	1xHDMI (female), 1xIR (3.5 minijack), 1xRS232 (3 pin captive screw connector)
Signal standard	HDMI 1.4 & HDCP 2.2
Audio	Digital Audio, Audio transmitted through HDMI
Transmission distance	1080P ≤ 70m, 4K ≤ 40m
Temperature	0°C~50°C
Reference humidity	10%~90%
Power supply	Input: 100VAC~240VAC, 50/60Hz Output: DC 24V, 1.25A
Dimension (W*H*D)	115mm x 16.2mm x 84mm
Power consumption	11W
Weight	0.15kg (Tx) / 0.15kg (Rx)

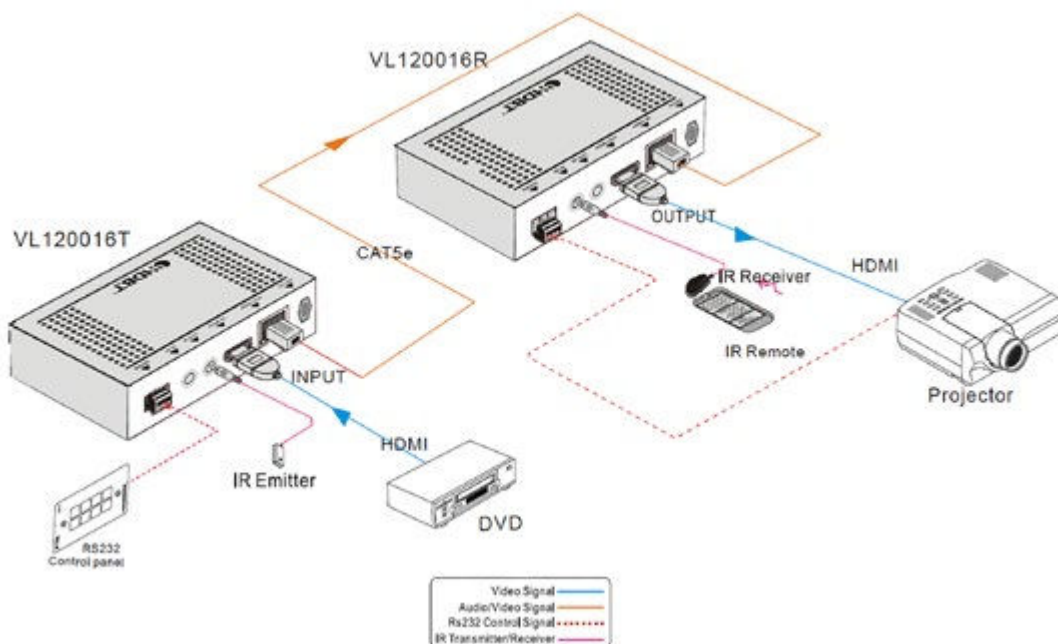

HDBaseT Extender 4K + IR




Transmitter and Receiver

	PART NO.
HDBaseT extender for HDMI - Transmitter and Receiver	VL120007
HDBaseT extender for HDMI - Transmitter	VL120007T
Infrared sender and receiver kit	VL120024

For more product info [click here](#)

VL120007 is a HDBaseT extender for HDMI and bi-directional IR signals, which contains a transmitter (VL120007T) and a receiver (VL120007R). It transmits 4K signal up to 131ft (40m), 1080P signal up to 230ft (70m) over single Cat5e/Cat6 cable. The extender set supports PoC function, meaning only one power supply is needed.

Input (VL120007T)	1xHDMI (female), 1xIR IN (3.5mm jack)
Output (VL120007T)	1xTP (RJ45), 1xIR Out (3.5mm jack)
Input (VL120007R)	1xTP (RJ45), 1xIR IN (3.5mm jack)
Output (VL120007R)	1xHDMI (female), 1xIR Out (3.5mm jack)
Transmission mode	HDBaseT
Resolution	Up to 4K@60Hz 4:2:0
Transmission distance	Maximum distance 4K 131ft (40m) and 1080P 230ft (70m)
SNR	>70dB@100MHz-100M
Bandwidth	10.2Gbps
THD	<0.005%@1KHz
HDMI standard	Support HDMI1.4 and HDCP1.4
Impedance	75Ω
Temperature	0°C~50°C
Reference humidity	10%~90%
Power supply	DC 12V, 1A
Dimension (W*H*D)	61mm x 24mm x 120mm
Weight	0.56kg/Set

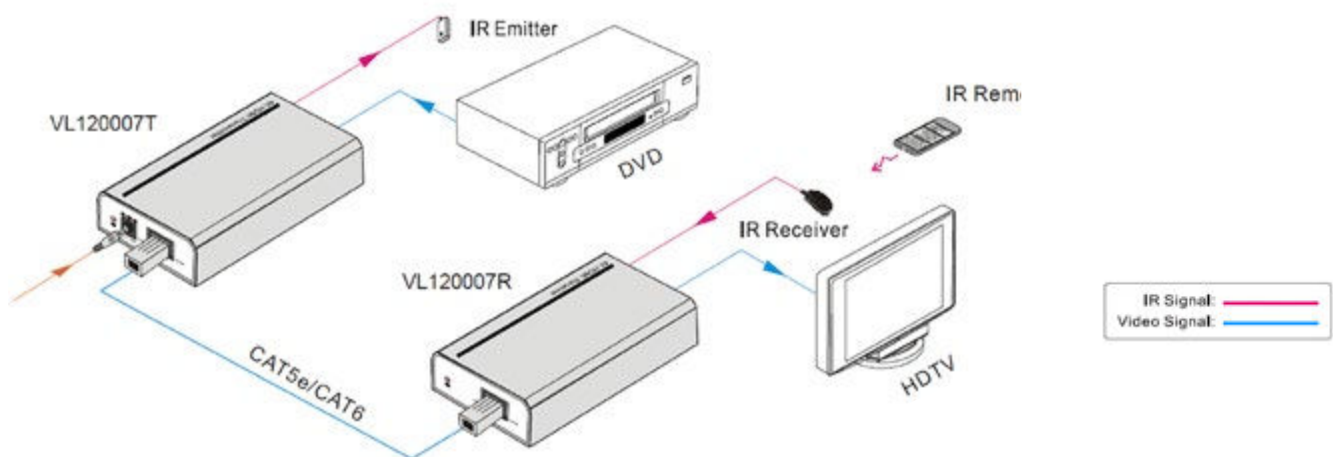

- Supports 4K@60Hz video signal transmission
- Max transmission distance is 4K 131ft (40m) and 1080P 230ft (70m) over single CAT5e/CAT6 cable
- High bandwidth: 10.2Gbps
- HD monitor compatible, HDMI1.4 and HDCP compliant
- Support PoC & CEC
- Use HDBaseT technology for extended capability and reliability
- Bi-directional IR control
- LED indicators showing work status



HDMI 18Gbps Extender kit (60m)



Transmitter and Receiver

PART NO.	
Extender Kit for HDMI - Transmitter and Receiver	VLHDMIEXT60



For more product info [click here](#)

This signal extender solution is designed for professional AV installations, ensuring seamless and high-quality signal transmission up to 60m. This super small HDMI extender is ideal for extending signals in meeting rooms, conference halls, and other professional settings.

- Supports HDMI 2.0, up to 4K@60Hz 4:4:4, HDR 10, 18G, HDCP 2.2.
- Extends signal up to 4K@60m over single CAT5e/6 cable.
- Power Supply included.
- Supports video resolution down-scaling from 4K to 1080p.
- Compact design, easy to install and simple to ope

Input (Transmitter)	1xHDMI (female)
Output (Transmitter)	1xCATx OUT (RJ45)
Input (Receiver)	1xCATx IN (RJ45)
Output (Receiver)	1xHDMI (female)
Resolution	Up to 4K@60Hz 4:4:4, HDR
Transmission distance	60 meters for both 4K60 and 1080p
HDMI standard	HDMI 2.0
Temperature	-5°C~55°C
Reference humidity	10%~90%
Power supply	DC 5V, 1A
Dimension (W*H*D)	88mm x 38mm x 18mm



Transmitter



Receiver




Wall Plate Extender Kit (60m) with USB-C and HDMI



Provides seamless auto-switching between USB-C and HDMI inputs and supports ultra-high-definition 4K60Hz (4:4:4) signal transmission up to 60 meters over a single CAT cable. Perfect for meeting rooms, classrooms, and conference spaces, this sleek EU 1-gang wall plate combines modern connectivity with plug-and-play

- Supports 4K@60Hz 4:4:4
- 2 inputs: 1x USB-C IN + 1x HDMI IN
- USB-C input supports up to 100W charging (when connected to a PD power supply)
- Extension up to 60 m for 4K/1080p over a single CAT cable - Receiver included
- Automatic / Manual input switching
- Two-way PoC (Power over Cable) – transmitter and receiver can power each other
- Downscaling support
- RS232 control
- **In-wall mount for plaster walls included in the box**

	PART NO.
Wallplate Extender Kit (60m)	VLWALLPLATE1
	For more product info click here

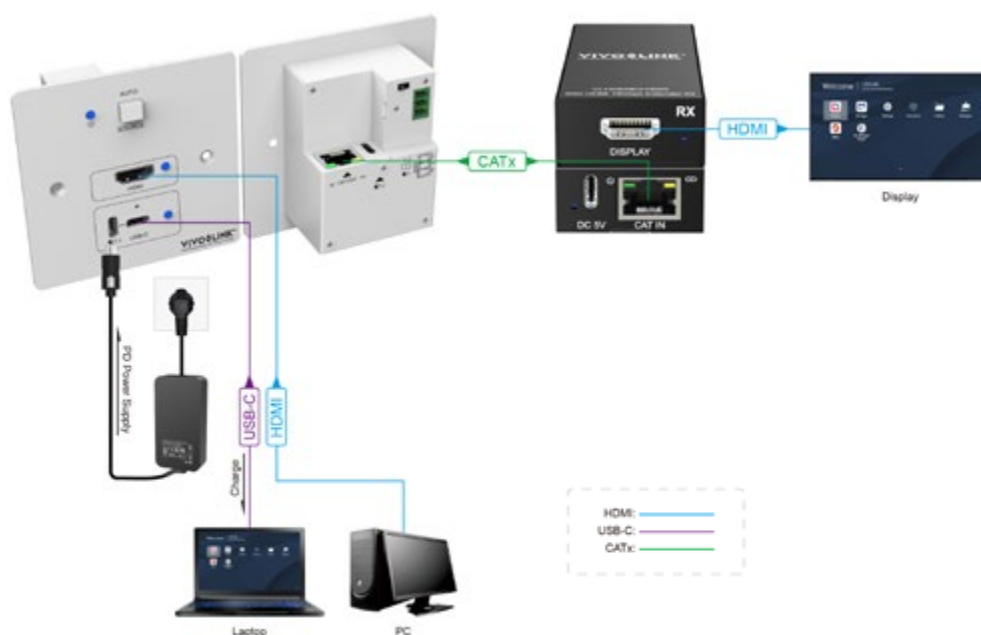

HDBaseT Extender Kit (150m)




Transmitter and Receiver

PART NO.	
HDBaseT extender kit for HDMI - Transmitter and Receiver	VLHDMIEXT150
For more product info click here	

Vivolink VLHDMIEXT150 is a professional HDMI extender kit designed for long-distance signal transmission in meeting rooms, conference centers, and other AV environments. It supports 4K60Hz signals and combines video, audio, control, and power over a single CAT cable – making installation simple and efficient.

- Transmits HDMI signals up to 150m at 1080p and 120m at 4K60Hz via a single CAT5e/6 cable
- HDMI loop-out on transmitter for local monitoring
- Analog stereo audio de-embedding on the receiver
- Supports bi-directional IR, RS-232, and CEC pass-through
- Compatible with HDR, HDR10+, Dolby Vision, and HLG
- Power over Cable (PoC) – requires only one power supply
- Compliant with HDCP 2.2 / 1.4 and DVI 1.0
- Compact design for easy and discreet installation

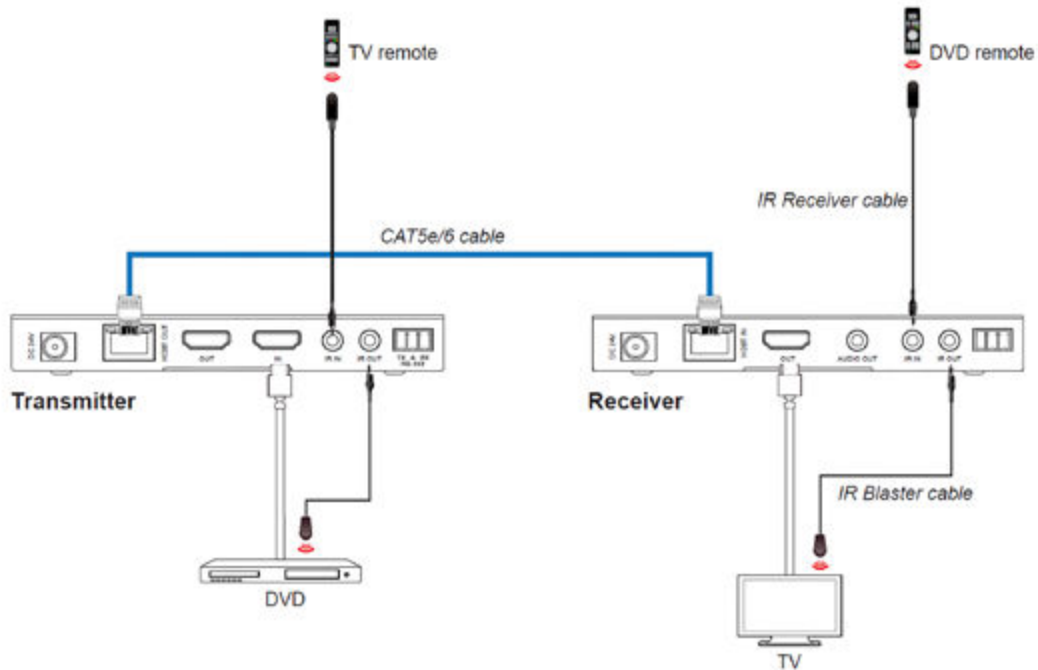

VLHDMIEXT150 - Kit front



VLHDMIEXT150 - Kit Back



OM3 Fiber Extender kit 4K



HDMI over fiber dongle kit 300m

4K fiber extender dongles HDMI 1:1 extension 300m (2km with out HDCP)

Typical installation:

It can be installed in a building with existing fiber network. Long distance 4K transmission to e.g. outdoor digital signage.


Function:

- 4K@60Hz signal extension
- HDCP1.4

Key features:

- Supports 4K HDCP1.4 10.2G 4K@60Hz 4:2:0
- Multimode fiber up to 300m
- Multimode fiber up to 300m (2km without HDCP)
- Powered via USB-A cables (included in the package)

PART NO.	
True 4K Fiber Extender kit 300m	VLHDMIEXTDGL100
For more product info click here	

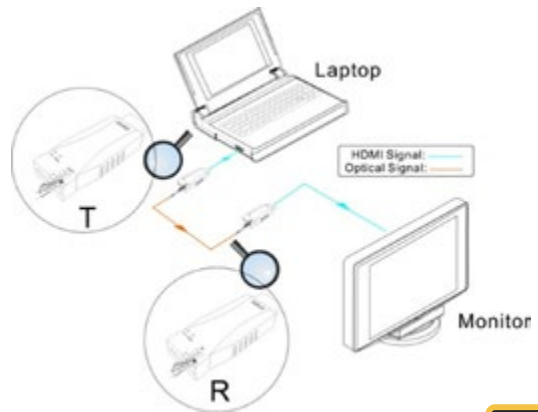

CAT Extender kit FullHD



HDMI over CAT dongle kit 50m

Ultra cost-efficient HDMI extension dongles using a CAT6a cable up to 50m extension. Support power over network cable (PoC) from transmitter to receiver.

Typical installation: It can be installed anywhere to extend HDMI signal up to 50m using a CAT6a cable.
E.g. private installation, info screens in shops or offices.

Function:


- HDMI extender
- Point to point (Tx to Rx) for 50m 1080P@60Hz

Key features:

- Super cost-effective HDMI extender over CAT cable
- USB power cable included in the package



PART NO.	
HDMI over CAT extender 50m	VLHDMIEXTDGL50
For more product info click here	

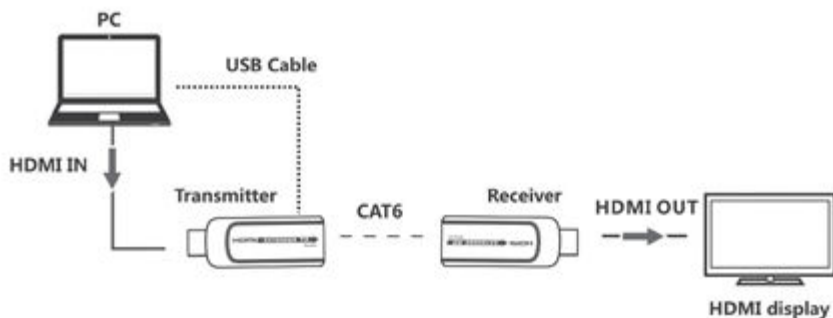

HDMI over IP/PoE 150m 1:253 + IR

1080P
FULL HD


Extend your Full HD HDMI signal up to 150 meters over a single CAT6 cable with this professional Vivolink HDMI over IP extender. Designed for stable transmission in AV installations, it supports HDMI 1.3a, HDCP 1.4 and delivers crystal-clear 1080P@60Hz video with minimal latency (10–30ms).

The system supports IR pass-through from receiver to transmitter, allowing remote control of source devices. Power is flexible via PoE or USB-C, and the robust metal housing ensures reliability in demanding environments such as meeting rooms, digital signage, or educational setups.

- Supports Full HD resolution 1080P@60 Hz
- Power PoE or USB-C
- Maximum transmission distance 150m at CAT6
- Up to 253 Receivers
- Loopout function




PART NO.	
HDMI over IP/PoE Transmitter	VLHDMIEXT3-T
HDMI over IP/PoE Receiver	VLHDMIEXT3-R

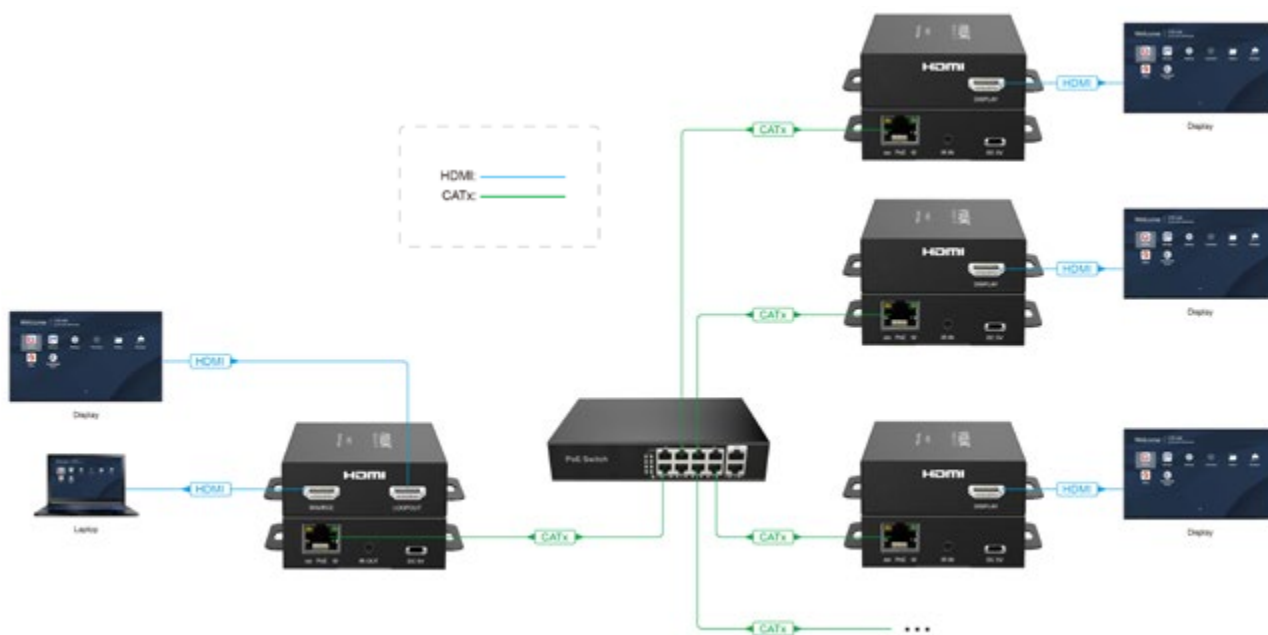
For more product info [click here](#)


AV-over-IP Solutions

Vivolink's AV-over-IP products deliver seamless, high-quality audio and video distribution across standard network infrastructures. Featuring advanced JPEG2000 technology, this system enables versatile and high-performance AV solutions ideal for corporate, education, and digital signage applications.

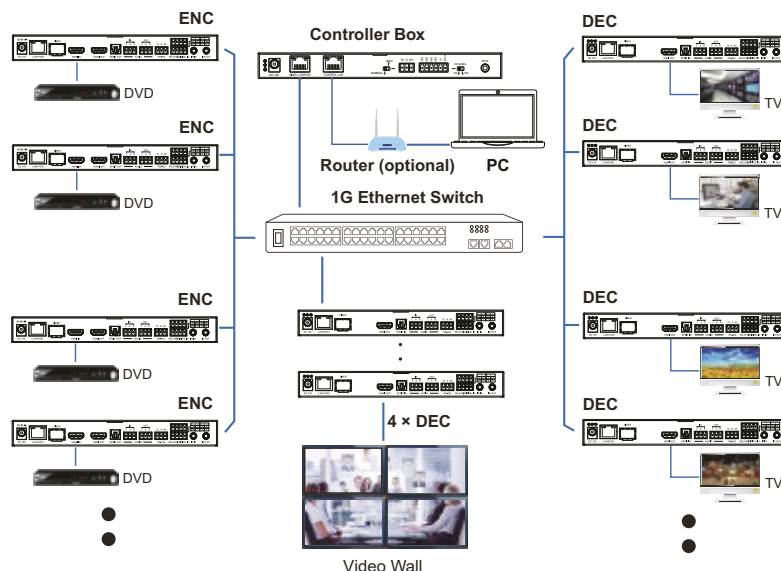

AV-over-IP Encoder - 4K60 JPEG2000

The VLVWIP2000-ENC encoder delivers pristine 4K60 HDR video over 1G Ethernet with audio embedding/extraction, ARC/eARC, USB/KVM, and IR/RS-232 controls. Integrated copper and fiber ports ensure flexible installations, ideal for high-quality, scalable AV distribution setups.

- Supports 4K60 HDR (4:4:4) HDMI input/output
- Integrated copper and fiber network ports in a single unit
- Audio embedding/extracting with ARC/eARC support



PART NO.	
Encoder JPEG200 AV over IP	VLVWIP2000-ENC
For more product info click here	

AV-over-IP Decoder - 4K60 JPEG2000

VLVWIP2000-DEC decoder receives 4K60 HDR streams with minimal latency. It offers ARC/eARC/S-PDIF audio return, USB/KVM controls, and intelligent video wall management. Dual copper and fiber ports provide installation flexibility, making it perfect for versatile AV deployments.

- 4K60 HDR (4:4:4) HDMI video decoding
- Intelligent video wall and matrix management
- ARC/eARC, S/PDIF audio return functionality



PART NO.	
Decoder JPEG200 AV over IP	VLVWIP2000-DEC
For more product info click here	

AV-over-IP Controller

VLVWIP2000-CTL controller manages AV-over-IP networks efficiently. It features dual isolated ports (control/video distribution with PoE), ensuring stable performance. A built-in Web GUI offers intuitive drag-and-drop setup and secure HTTPS/SSH access, simplifying configuration and management.

- Dual network isolation (Control LAN & Video LAN)
- Built-in Web GUI with drag-and-drop functionality
- Supports JPEG2000, IR, RS-232, KVM, GPIO and CEC Controls
- PoE support on Video LAN port (eliminates need for external power supply)



PART NO.	
Controller for Encoder and Decoder	VLVWIP2000-CTL
For more product info click here	

HDBaseT 2.0 KVM Extender Kit

Ideal for a touch screen, a keyboard and a mouse (including 4K HDMI signal)

VL120021 is a HDBaseT 2.0 KVM Extender Set, compliant with HDMI 2.0 & HDCP 2.2. The 4K HDMI Extender set is developed with the latest HDBaseT 2.0 technology to extend uncompressed HDMI video, audio, USB 2.0, control signals and PoC over a single CAT5e/6 cable. It is PoC supported. Ideally designed for smart displays and KVM solutions fitting digital signage markets.

Input (VL120021T)	1 HDMI (19 pin Type-A male), 1 RS232
Output (VL120021T)	1 HDBT (RJ45 female). 1 USB OUT (Type-B)
Input (VL120021R)	1 HDBT (RJ45 female). 3 USB IN (Type-A)
Output (VL120021R)	1 HDMI (19 pin Type-A male)
Signal standard	HDMI 2.0 & HDCP 2.2
HDMI embedded audio	PCM/Dolby Digital/DTS/DTS-HD
EDID management	EDID pass-through
Transmission distance	4K≤100m (Cat6)
Reference humidity	-10°C~55°C
Power supply	Input: 100V~240V AC; Output: DC 12V 2A
Power consumption	18W (max)
Dimension (W*H*D)	4.5"x 0.86" x 3.74", 116mm x 22mm x 95mm
Net weight	198g

- Supports 4K@30Hz resolution
- Compatible with HDMI2.0 and backwards compatible with all previous HDMI standards (e.g. HDMI 1.4), delivers high-resolution AV signal (1080p 3D, 4K@60Hz)
- Up to 100m over single CAT6 cable
- USB 2.0 transfer speed up to 200Mbps
- Ideal for a touch screen, a keyboard and a mouse
- EDID pass-through
- HDCP 2.2 compliant
- Front panel status LEDs for power, link & HDCP
- USB & RS232 control
- Unidirectional PoC (Power over HDBaseT)


PART NO.	
HDBaseT 2.0 KVM extender kit	VL120021
For more product info click here	



Transmitter/back



Receiver/back

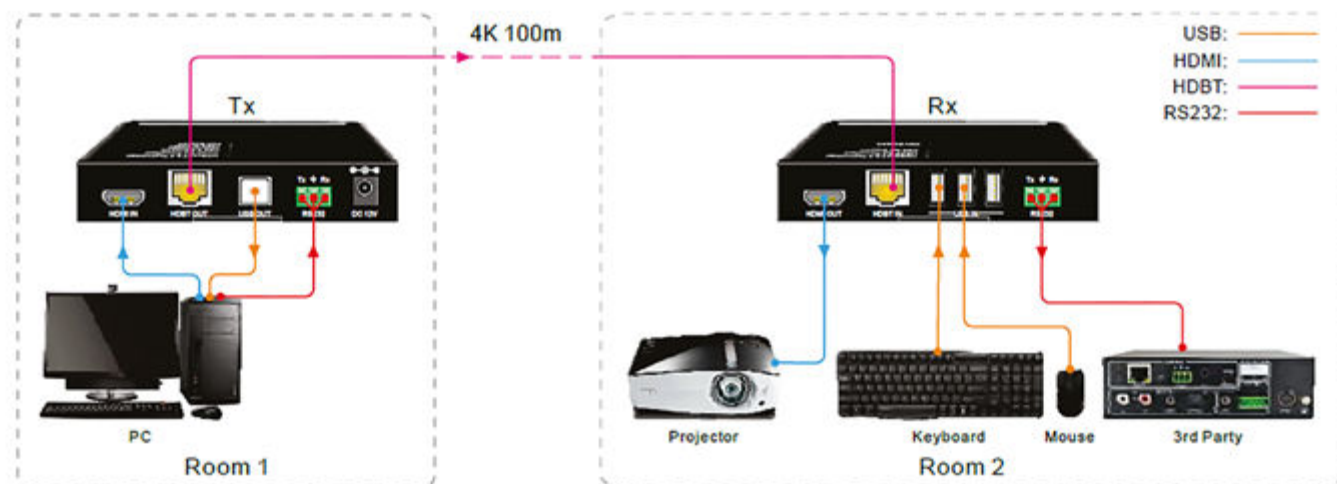

HDBaseT KVM kit (150m) with USB 2.0



HDBaseT Mode: Supports USB 2.0 devices such as cameras and storage. Delivers 4K60 video and audio up to 100 m — ideal for meeting rooms and professional AV setups.

Long Reach Mode: Optimized for HID devices like keyboards, mice, and touch panels. Extends 1080p signals up to 150 m / 4K60 up to 120 m — perfect for long-distance control applications.

	PART NO.
HDBaseT KVM kit (150m)	VLKVM150



For more product info [click here](#)


- Supports 4K@60Hz resolution
- Support 18Gbps video bandwidth & video resolution up to 4K2K@60Hz YUV 4:4:4
- Long reach 150m for 1080P and 120m for 4K transmission
- 2 x USB KVM function supporting USB 2.0 transfer speed up to 400Mbps
- HDCP 2.2 compatible
- With Mode DIP switch to select HDBaseT Mode & Long Reach Mode
- Support bi-directional POC (Power over Cable) function

Input (Transmitter)	1 HDMI (19 pin Type-A male), 1 USB (Type-B), IR IN, IR OUT
Output (Transmitter)	1 HDBT (RJ45 female)
Input (Receiver)	1 HDBT (RJ45 female), 2 USB IN (Type-A), IR IN, IR OUT
Output (Receiver)	1 HDMI (19 pin Type-A male)
Signal standard	HDMI 2.0b & HDCP 2.2
USB Compliance	USB 2.0
Housing	Metal Enclosure
Transmission distance	HDBaseT Mode: 4K60 = 100m / Long Reach Mode: 1080P = 150m -- 4K60 = 120m
Operation Temperature	0°C~40°C
Power supply	IDC 24V/1A; Support bi-directional POC function
Power consumption	13.2W (max)
Dimension (W*H*D)	140mm [W] x 65mm [D] x 18mm [H]
Net weight	249g

Transmitter



Receiver

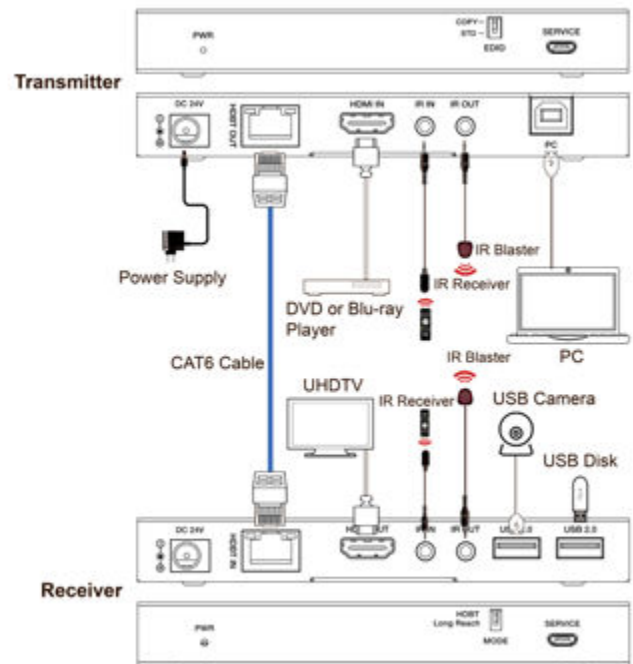

Scaler/Switchers



HDBaseT Seamless Scaler/Switcher 4K w/multi view

VLSC262 is a true 4K presentation switcher with glitch-free source switching.

	PART NO.
4K 6x1 presentation switcher	VLSC262
	For more product info click here

VLSC262 is a seamless 4x1 (+2 selectable inputs) video scaler switcher with 4x HDMI, 1x DisplayPort and 1x USB-C inputs and 1x HDMI, 1x HDBaseT output.


It provides seamless and glitch-free switching with advanced scaling for high quality presentations.

With HDBaseT integration, the unit is able to transmit full HD video up to 230ft/70m.



- Multiview function (can show 4 pictures on one screen)
- True seamless switching
- 6 input 2 output HDBaseT and HDMI mirror
- HDBT output transmission up to 40m@4K and 70m@1080p
- Inputs include 4 HDMI, 1 DP, 1 USB-C (USB-C and DP is optional with 2 HDMI)
- USB-C can provide 60W power charging
- Supports HDMI1.4, HDCP2.2
- Resolution up to 4K/30Hz/4:4:4 with seamless switching
- Microphone/line input and balance/digital audio breakout
- Audio delay function via front panel
- Manual/auto display control
- IR, RS232 and GUI control.

Video input	(4)HDMI IN (1~4), (1) DP, (1) USB-C
Video input connector	(4)Type-A female HDMI, (1) DisplayPort, (1)Type-C USB
Input resolution	HDMI: Up to 4K@30Hz 4:4:4 DP: Up to 4K@30Hz 4:4:4 USB-C: Up to 4K@30Hz 4:4:4
Video output	(1)HDMI, (1) HDBaseT
Video output connector	(1)Type-A female HDMI, (1) RJ45
Output resolution	HDMI: Up to 4K@30Hz 4:4:4 HDBaseT: Up to 4K@30Hz 4:4:4
HDMI standard	Up to 1.4
HDCP version	Up to 2.2
Audio input	(1)LINE, (1) MIC
Audio input connector	(2)3-pin terminal blocks
Frequency response	20Hz ~ 20KHz, ±3dB
Max input level	2.0Vrms ± 0.1
L-R level deviation	< 0.3dB, 1KHz sine at 0dBFS level (or max level before clipping)
Input impedance	>10KΩ
LINE/MIC audio format	PCM 2.0
HDMI/DP audio format	PCM 2.0 48K
Audio output	(1)L+R
Audio output connector	(1)5-pin terminal block
Frequency response	20Hz ~ 20KHz, ±1dB
Max output level	2.0 ± 0.1Vrms
THD+N	< 0.05%, 20Hz ~ 20KHz bandwidth, 1KHz sine at 0dBFS level (or max level)
SNR	>80dB, 20Hz ~ 20KHz bandwidth

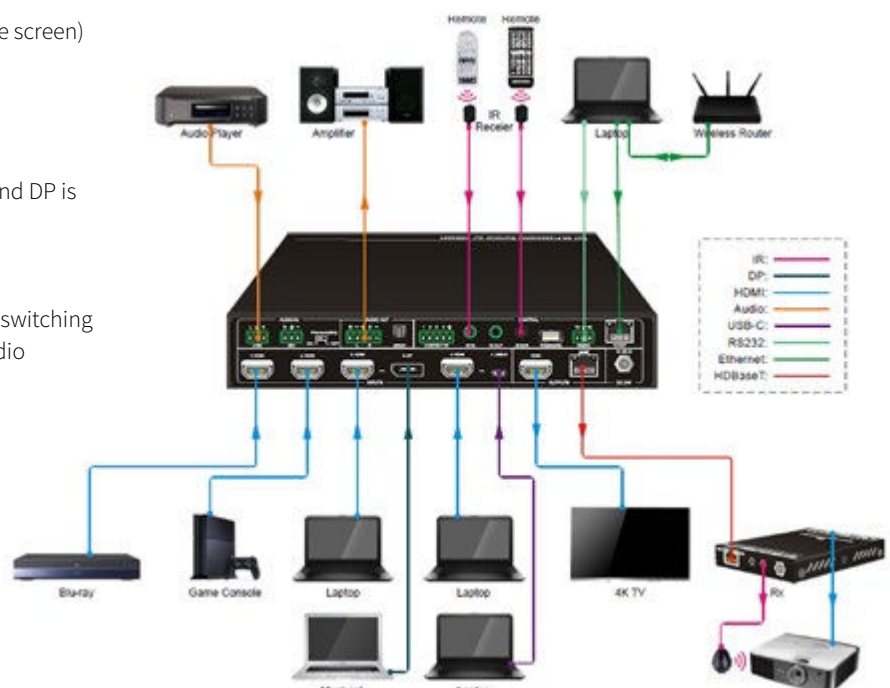


USB-C and HDMI Matrix Presentation Switcher 4x2



The VLUSBCMAT4X2 is a dual-output presentation switcher designed for meeting rooms and professional AV installations. It offers four inputs (2x USB-C and 2x HDMI) and delivers simultaneous output through 2x HDMI. The unit supports flexible control via TCP/IP, RS232, IR, front-panel buttons and sensor integration, making it suitable for automated or manual switching environments. Two balanced audio outputs (5-pin Phoenix) provide straightforward integration with external audio systems. For peripherals, the device includes four USB ports (2x USB-A and 2x USB-C) sharing 3A total, enabling basic KVM functionality. Built on USB 3.2 and HDMI 2.0 standards, it ensures stable 4K connectivity.

- 4x2 matrix with 2 USB-C and 2 HDMI inputs
- Dual HDMI outputs supporting 4K (HDMI 2.0)
- Integrated KVM hub for 4 USB devices (USB-A & USB-C)
- Multiple control options: TCP/IP, RS232, IR, buttons, sensor
- Balanced audio outputs via 5-pin Phoenix
- USB-C ports supporting USB 3.2
- USB-C input supports up to 100W charging for single input or 60W per port when two USB-C inputs are active simultaneously

PART NO.	
USB-C/HDMI 4x2 Switcher	VLUSBCMAT4X2
 For more product info click here	

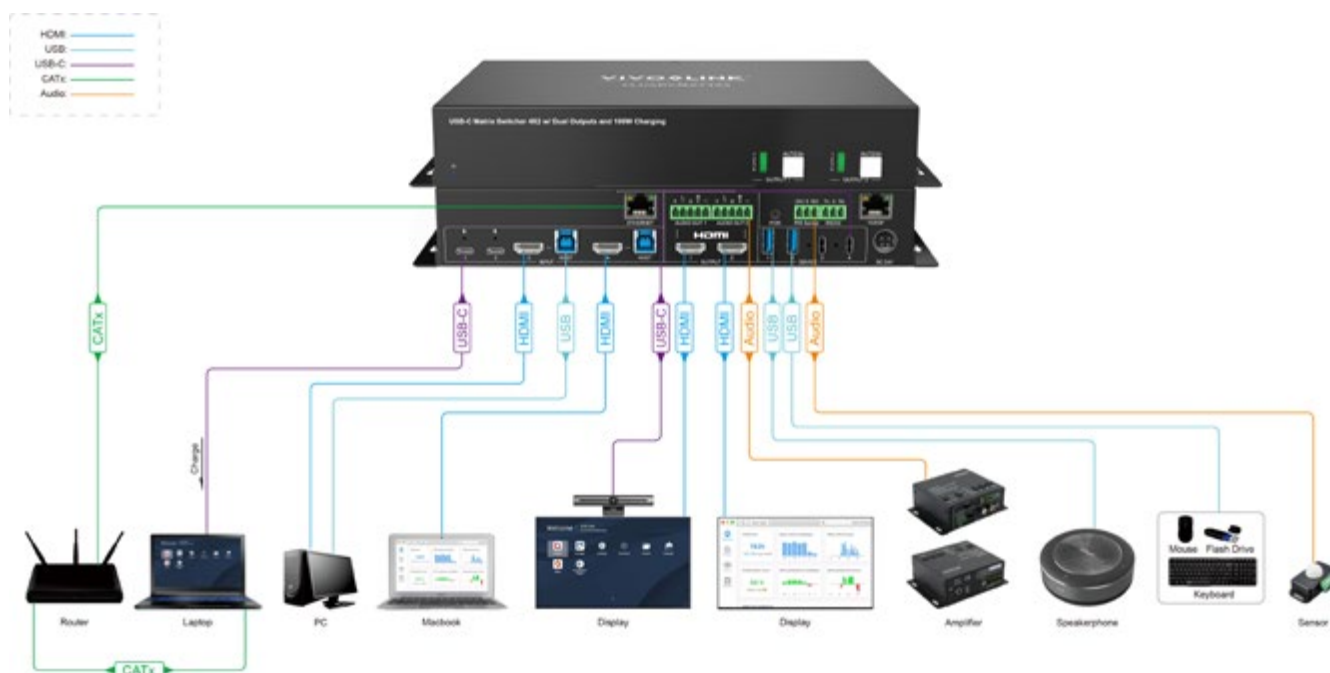

HDBaseT Matrix Switcher



4x4 HDMI 2.0 HDBaseT Matrix Switcher

VLHDMIMAT4X444 is a four-input by four-output HDBaseT and HDMI matrix with HDCP 2.2 and up to 4K/UHD@60Hz video support. It transmits 4K video to distances up to 40 metres and 1080p video to distances up to 70 metres over a single CAT6a Ethernet cable. The four HDBaseT outputs support 24V Power over Cable (PoC) feature, allowing the receivers to draw their power from the matrix over the HDBaseT cable.

	PART NO.
HDBaseT Matrix Switcher	VLHDMIMAT4X444
Receiver for VLHDMIMAT4X444	VLHDMIMAT4X444-R



For more product info [click here](#)


- 4x4 HDBaseT matrix switcher with audio matrix
- Fully compliant with the HDMI 2.0 and HDCP 2.2
- Supports HDMI resolution up to 4K@60Hz 4:4:4, HDR10
- Features four mirrored HDMI outputs for four HDBaseT outputs, and the four HDMI outputs support 4K to 1080p down-scaling
- The four HDBaseT outputs support 24V PoC, allowing the receivers to draw their power from the matrix switcher over the HDBaseT cable
- Transmits 4K signal to the distance up to 40 metres and 1080p signal to the distance up to 70 metres over a single CAT6a Ethernet cable

Input Connector	(4) Type-A female HDMI
Output	(4) HDBaseT, (4) HDMI
HDMI Output Resolution	Up to 4Kx2K@60Hz 4:4:4, HDR10, 1080p 3D. Supports 4K to 1080p down-scaling.
HDBaseT Output Resolution	Up to 4Kx2K@60Hz 4:2:0
HDMI Audio Signal	LPCM 7.1 audio, Dolby Atmos®, Dolby® TrueHD, Dolby Digital® Plus, DTS:X™, and DTS-HD® Master Audio™ pass-through
Output	(4) Stereo analogue L+R audio, (4) Digital SPDIF audio
Digital SPDIF Audio Format	Supports PCM, Dolby Digital, DTS, DTS-HD
Local Audio Sampling Rate	Supports 44.1KHz, 48KHz, 96KHz
Frequency Response	20Hz ~ 20KHz, ±3dB
Control port	(4) IR IN, (1) IR ALL IN, (4) IR OUT, (1) IR ALL OUT, (1) IR EYE (5) RS232, (1) FIRWARE, (1) TCP/IP
Transmission Mode	HDBaseT
Transmission Distance	1080p ≤ 230 feet (70 metres), 4K@60Hz ≤ 131 feet (40 metres)
Bandwidth	18Gbps
Operation Temperature	-5°C ~ +55°C
Storage Temperature	-25°C ~ +70°C
Relative Humidity	10% ~ 90%
External Power Supply	100V~240V AC, 50/60Hz
Power Consumption	65W (Max)
Dimension (W*H*D)	436.4mm x 44mm x 356.6mm
Net Weight	3.3kg

Front



Back

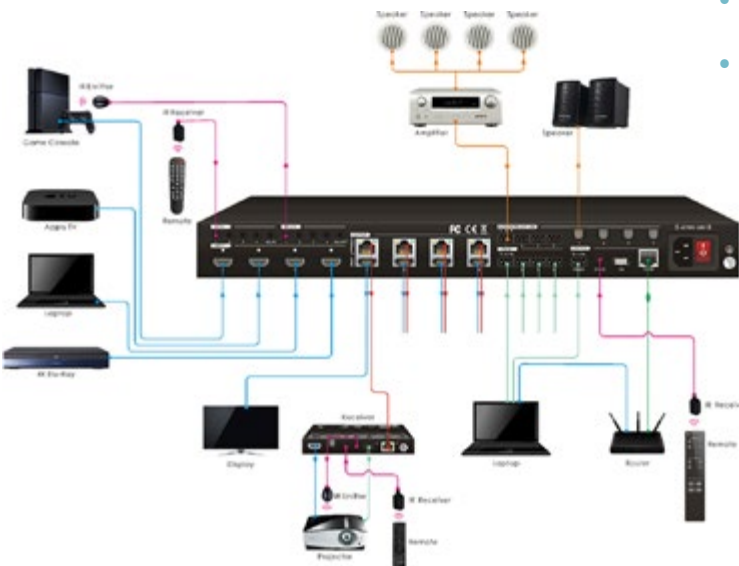

- Supports audio matrix. Provides four digital SPDIF audio outputs and four analogue L+R audio outputs for HDMI input audio de-embedding and HDBaseT output audio de-embedding. Moreover, the four digital SPDIF audio outputs supports ARC audio output from receivers
- Volume adjustment for analogue L+R audio outputs
- Supports comprehensive EDID management and advanced HDC handling
- Controllable via front panel buttons, RS232 local and pass-through, IR local and pass-through, CEC, and TCP/IP (built-in GUI)



VLHDMIMAT4X444-R

HDMI Matrix Switcher

HDMI 8x8 4K Matrix Switcher with Audio Matrix/ Downscaling

VLHDMIMAT8X8 is a professional 8x8 HDMI 2.0 Matrix Switcher with Audio Matrix. It includes 8 HDMI inputs, 8 HDMI outputs and the last four outputs with down-scaling function, which is designed for switching four HDMI2.0 and HDCP2.3 compliant signals. It also features 8 SPDIF and 8 analogue audio outputs for audio matrix. The matrix switcher features comprehensive EDID management and advanced HDCP handling to ensure maximum functionality with a wide range of video sources.


The matrix switcher not only supports bi-directional IR, RS232 extension, but also has IR, RS232, and TCP/IP control options.

PART NO.	
HDMI 2.0 8x8, Matrix switcher	VLHDMIMAT8X8
For more product info click here	

- 8x8 HDMI 2.0 Matrix Switcher
- Supports 4K@60Hz 4:4:4, HDR, HDCP2.3 compliant
- Audio Matrix, audio out can be de-embedded from arbitrary input or output
- Individual volume adjustment on each L+R output
- Supports 4K to 1080p down-scaling up to 4 outputs
- HDMI out provides 2.5W to power Active Optical Cable (AOC)
- HDMI Output support up to 5V500mA for AOC cable
- Controllable by front panel, IR, RS232 and TCP/IP



Video	
HDMI output resolution	Up to 4K@60Hz 4:4:4, HDR10 and Dolby Vision
HDMI output	Supports up to 5V500mA for AoC cable
HDMI version	Up to 2.0
HDCP version	Up to 2.3
HDMI audio signal	LPCM 7.1 audio, Dolby Atmos®, Dolby® TrueHD, Dolby Digital® Plus, DTS:X™, and DTS-HD® Master Audio™ pass-through.
Digital audio output	
Output	(8) Digital SPDIF audio
Output connector	(8) Toslink connector
Digital SPDIF audio format	Supports PCM, Dolby Digital, DTS, DTS-HD
Frequency response	20Hz – 20KHz,±1dB
Max output level	±0.05dBFS
Analogue audio output	
Output	(8) Analog L/R Audio
Output connector	(8) L&R (RCA)
Digital SPDIF audio format	PCM 2CH
Frequency response	20 Hz to 20 kHz, ±1dB
Control	
Control port	(1) FIRWARE, (1) IR EYE, (1) RS232, (1) TCP/IP,
Control connector	(1) USB-A, (1) 3.5mm jack, (1) 3-pin terminal block, (1) RJ45
General	
Bandwidth	18Gbps
Power consumption	24W
Dimension (W*H*D)	436.4mm*44mm*236mm
Net weight	3kg

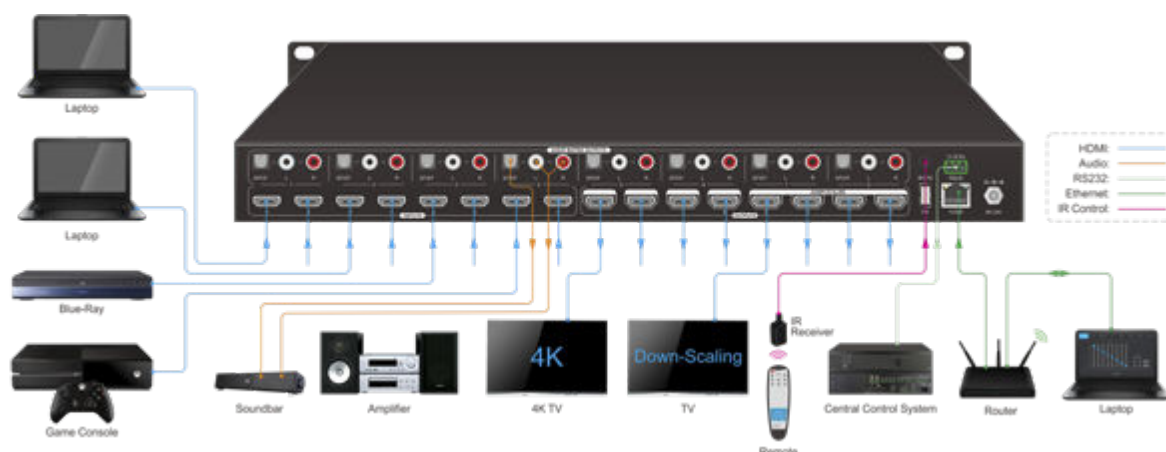

HDMI Matrix Switcher



HDMI 4x4 4K Matrix Switcher w/GUI and RS232 control

VLHDMIMAT4x4 is a 4K HDR capable 4x4 HDMI Matrix Switcher that features 18Gbps bandwidth and HDCP2.2 on all inputs and outputs.

It is fully compliant with HDMI2.0 standard and backward compatible with old HDMI1.4 sources and displays. It provides 4 coaxial ports for breakout audio from corresponding HDMI outputs.

	PART NO.
HDMI 4x4 4K matrix switcher	VLHDMIMAT4X4
	 For more product info click here


Back



Front

Input signal	4xHDMI
Input connector	Female Type-A HDMI
Output signal	4xHDMI; 4xSPDIF audio
Output connector	Female Type-A HDMI; COAX connector
Control signal	1xIR IN; 1xTCP/IP; 1xRS232
Control connector	3.5mm minijack; female RJ45; 3-pin pluggable terminal block
Video signal	HDMI2.0 & HDCP2.2
Audio signal	Dolby Digital, DTS, DTS-HD
General	
EDID management	Built-in EDID data and manual EDID management
Resolution range	640x480@60Hz~4K@60Hz 4:4:4, 1080P 3D
HDMI cable length	≤5m
Power supply	24VDC, 1.25A
Power consumption	14W (Max)
Dimension (WxHxD)	437.0mm x 44.0mm x 236.5mm
Weight	1.75kg
Temperature	-10°C~ 55°C
Reference humidity	10%~90%

- Supports 18Gbps bandwidth for 4K@60Hz 4:4:4 8bit
- HDCP2.2 supported to ensure compatibility with latest contents
- Deep colour formats and HDR capability
- HD audio supported up to DTS:X and Dolby Atmos
- Smart EDID management for optimum resolution
- Controllable via front panel button, IR, RS232 and TCP/IP
- Built-in GUI programme for matrix setup and control over LAN

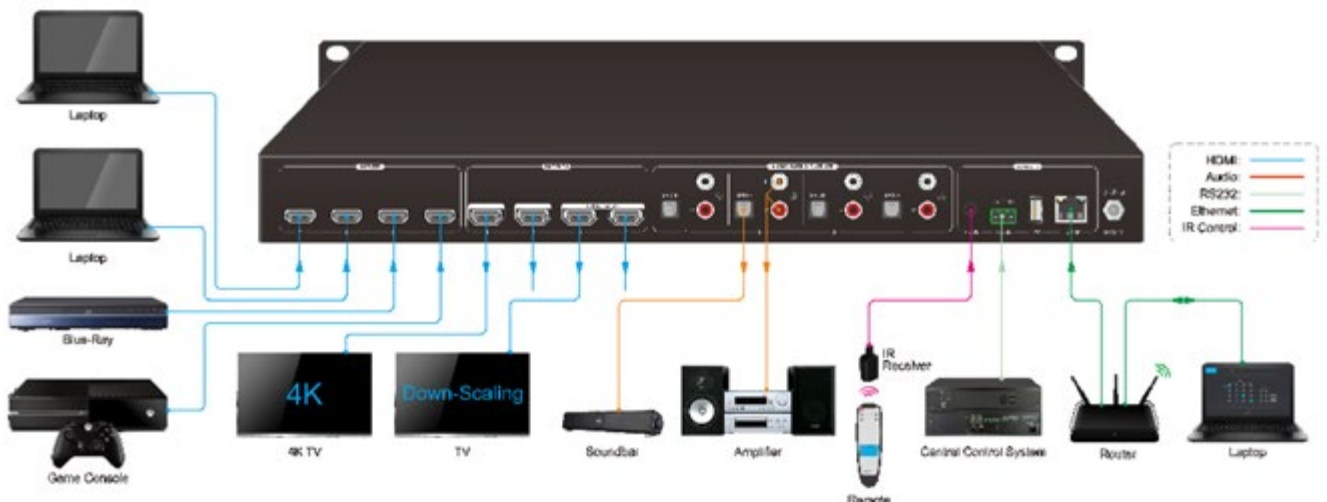

HDMI 4x2 4K Matrix Switcher w/GUI and RS232 control

VLHDMIMAT4X2RS is a 4K HDR Matrix Switcher with 4 inputs and 2 outputs supporting 18Gbps bandwidth and HDCP2.2 on all inputs and outputs. It is fully compliant with HDMI2.0 standard and backward compatible with old HDMI1.4 sources and displays. SPDIF and 3.5mm audio breakout audio from corresponding HDMI outputs.


	PART NO.
HDMI 4x2 4K matrix switcher	VLHDMIMAT4x2RS

For more product info [click here](#)



- Supports 18Gbps bandwidth for 4K@60Hz 4:4:4 8bit
- HDCP2.2 supported to ensure compatibility with latest contents
- Deep colour formats and HDR capability
- HD audio supported up to DTS:X and Dolby Atmos
- Smart EDID management for optimum resolution
- Controllable via front panel button, IR, RS232
- Built-in GUI programme for matrix setup over LAN
- Telnet control is not supported

Video input	(4) HDMI
Video input connector	(4) Type-A female HDMI
Video input video resolution	Up to 4K@60Hz 4:4:4 8bit
HDMI audio format	Supports Dolby Atmos, Dolby TrueHD, Dolby Digital Plus, Dolby Digital, DTS-X, DTS-HD Master Audio, DTS 5.1, 2 - 8Ch PCM 32-192kHz 16-24 bits; 2 - 8Ch PCM 32-192kHz 16-24 bits.
HDMI input cable	4K@60Hz 4:4:4 ≤ 3metres, other ≤ 5metres
Video output	(2) HDMI
Video output connector	(2) Type-A Female HDMI
Video output video resolution	OUT A: Up to 4K@60Hz 4:4:4 8bit, HDR10, Dolby Vision, supports colour space 4:2:2/4:2:0 to 4:4:4, 4K to 1080p down-scaling. OUT B: Up to 4K@60Hz 4:4:4 8bit, HDR, Dolby Vision
HDMI output cable	≤ 5 metres
HDMI version	Up to 2.0
HDCP version	Up to 2.2
Audio output	(1) Digital SPDIF audio, (1) 3.5mm jack
Control port	(1) EDID Switch, (1) FW, (1) RS232, (1) IR IN, (1) TCP/IP
Control connector	(1) 4-pin DIP Switch, (1) Micro-USB, (1) 3-pin terminal block, (1) 3.5mm jack, (1) RJ45
Bandwidth	18Gbps
External power supply	Input: AC 100~240V, 50/60Hz; Output: 12V DC 1A
Power consumption	7.5W (Max)
Dimension (W*H*D)	200mm x 28.5mm x 100mm

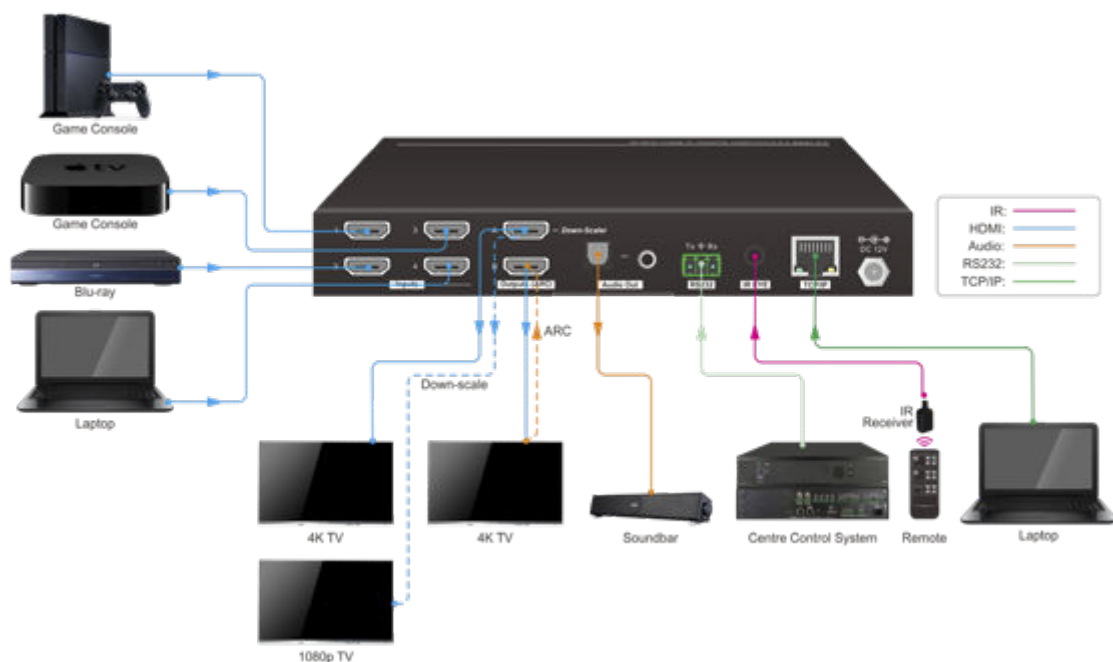

3x1 HDMI Switcher 4K



HDMI 2.0 switcher 3x1 4K@60Hz with auto switching


VLHDMISW131 is a 3x1 ultra small 4K@60Hz HDMI switcher that is powered via HDMI cable. Supports auto switching and is easy to hide behind a monitor.

	PART NO.
HDMI switcher 3x1	VLSW131
	For more product info click here



Input	(3) HDMI
Input connector	(3) Female type-A HDMI
HDMI input resolution	Up to 4K@60Hz 4:4:4
HDMI standard	2.0
HDCP version	2.2
Output	(1) HDMI
Output connector	(1) Female type-A HDMI
HDMI output resolution	Up to 4K@60Hz 4:4:4
HDMI standard	2.0
HDCP version	2.2
HDMI Audio format	Supports LPCM 7.1 audio, Dolby Atmos®, Dolby® TrueHD, Dolby Digital® Plus, DTS:X™, and DTS-HD® Master Audio™ passthrough
Bandwidth	18Gbps
Operation temperature	-5°~ +55°
Storage temperature	-25°C~ +70°C
Relative humidity	10%-90%
Power supply	Powered by HDMI input source.
Power consumption	0,1W (Max)
Dimension (W*H*D)	105mm x 55mm x 18mm
Net weight	150g

- Powered by the HDMI input source and no need of any external power supply (simplifying the installation)
- Supports video resolution up to 4Kx2K@60Hz 4:4:4 and 1080P
- Supports HDR 10 and Dolby Vision
- 18Gbps high bandwidth
- Fully compliant with the HDMI 2.0 and HDCP 2.2 specifications
- Controlled by IR remote
- Supports CEC pass-through
- Four LEDs to indicate the current operating status

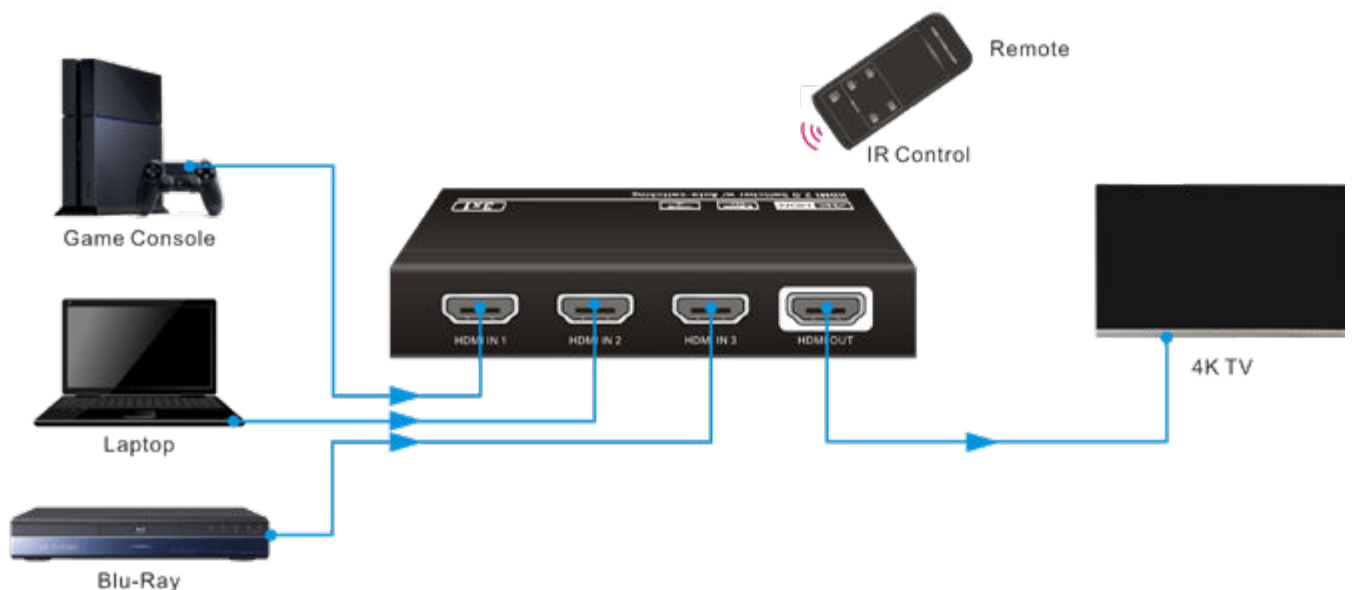

4x1 HDMI Switcher 4K



HDMI 2.0 switcher 4x1 4K@60Hz ARC

VLHDMISW141 is a 4x1 ultra slim 4K@60Hz HDMI switcher that supports ARC and de-embedded analogue audio output.

	PART NO.
HDMI switcher 4x1	VLSW141H




For more product info [click here](#)



- HDMI switcher with 4 HDMI inputs and one HDMI output
- Supports video resolution up to 4K@60Hz 4:4:4 HDR
- 18Gbps high bandwidth
- Fully compliant with the HDMI 2.0 and HDCP2.2 specifications
- Auto switch on active video signal
- RS232 reply on source input status
- Supports audio return channel (ARC)
- Advanced EDID management: multiple preset and user defined allowed
- Controllable via RS232 and IR
- Supports CEC
- Provides seven LEDs to indicate the current operating status and to assist troubleshooting an installation
- Firmware upgrade by Micro-USB port
- RS232 control and audio line out to active speakers

Input	(4) HDMI
Input connector	(4) Female type-A HDMI
HDMI input resolution	Up to 4K@60Hz 4:4:4
HDMI standard	2.0
HDCP version	2.2
Output	(1) HDMI
Output connector	(1) Female type-A HDMI
HDMI output resolution	Up to 4K@60Hz 4:4:4
HDMI standard	2.0
HDCP version	2.2
Audio output	(1) AUDIO
Output connector	(1) 3.5mm mini stereo audio jack
Audio format	PCM
Audio output impedance	70 Ohms
Frequency response	20Hz to 20kHz, ±3dB
Control	(1) IR IN; (1) RS232
Control connector	(2) 3.5mm mini jack
Bandwidth	18Gbps
Operation temperature	-10°~ +55°
Storage temperature	-25°C~ +70°C
Relative humidity	10%-90%
Power supply	Input:100V~240V AC; Output: 5V DC 1A
Power consumption	5W(Max)
Dimension (W*H*D)	194mm x 12mm x 81mm
Net weight	180g

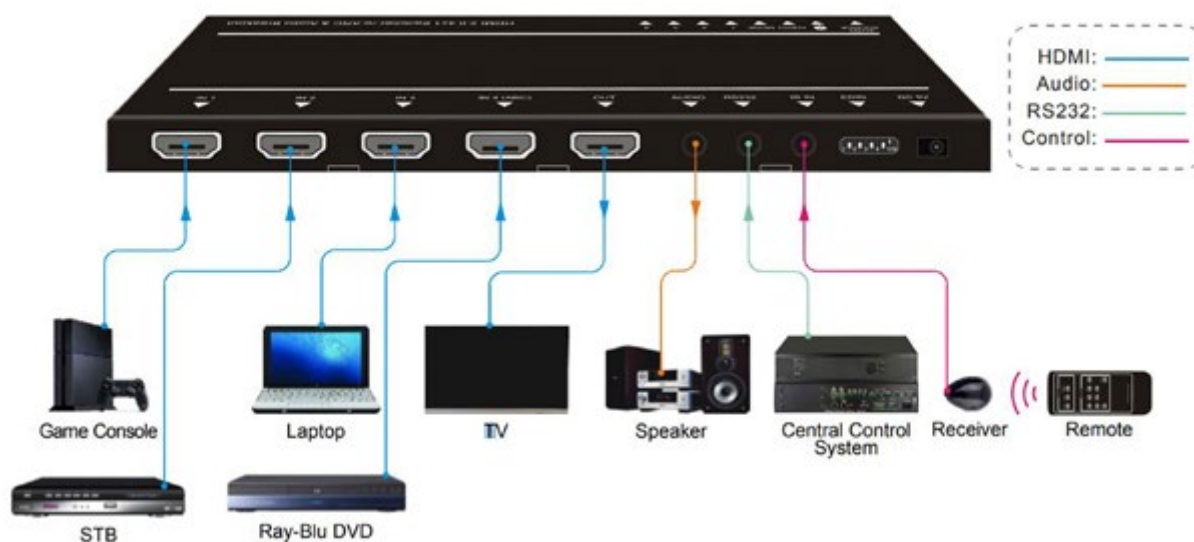


3x1 HDMI Switcher 8K



Boost your AV setup with the Vivolink VLSW131-8K HDMI 3x1 Switch. Connect up to three sources and switch smoothly to one 8K@60Hz display with HDR and Dolby Vision. The unit is powered directly from the HDMI input, eliminating external PSU and reducing cable clutter. Includes IR control, LED input indicators, multichannel audio pass-through, 40 Gbps bandwidth and full HDCP 2.3 support.

- 8K@60Hz Support – Supports 8K video with HDR and Dolby Vision.
- 3x1 Switching – Auto or manual selection between three HDMI sources.
- HDMI-Powered – Powered directly from the HDMI 5V line, no external PSU.
- Easy Control & Status – Includes IR remote and LED indicators for input status.

	PART NO.
3-Port HDMI Switcher 8K	VLSW131-8K
	For more product info click here

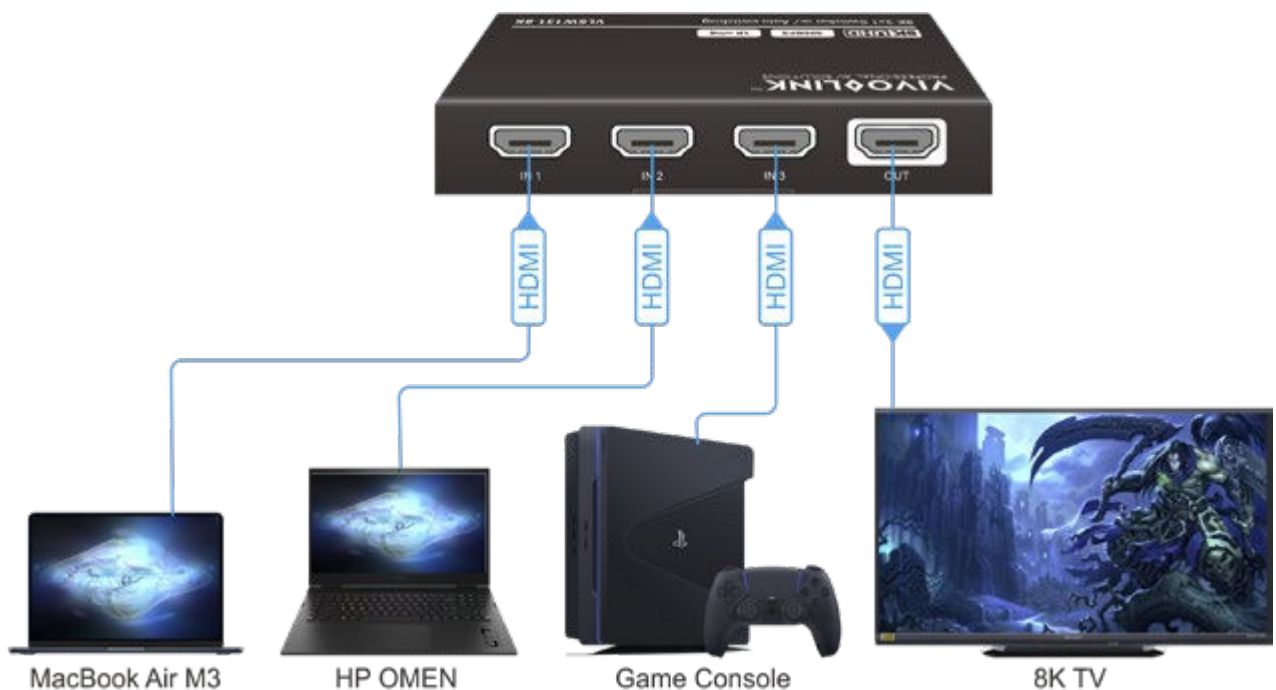

4x1 HDMI Switcher 8K



High-performance 4x1 HDMI switch with support for up to 8K@60Hz 4:2:0 HDR video. With 40Gbps bandwidth and full HDMI 2.1 / HDCP 2.3 compliance, it ensures superior image quality and compatibility.

Includes advanced EDID management, eARC support, analogue audio de-embedding, and control via RS232 and IR. Features CEC pass-through and LED indicators for easy installation and diagnostics.

- 4x HDMI inputs and 1x HDMI output
- Supports video up to 8K@60Hz 4:2:0 HDR
- 40Gbps high bandwidth – HDMI 2.1 & HDCP 2.3 compliant
- eARC support and analogue audio de-embedding
- Advanced EDID management – presets & user defined
- Control via RS232 and IR
- Supports CEC pass-through
- Status LEDs for input and troubleshooting


Front



Back



	PART NO.
4-Port HDMI Switcher 8K	VLSW141H-8K
	For more product info click here

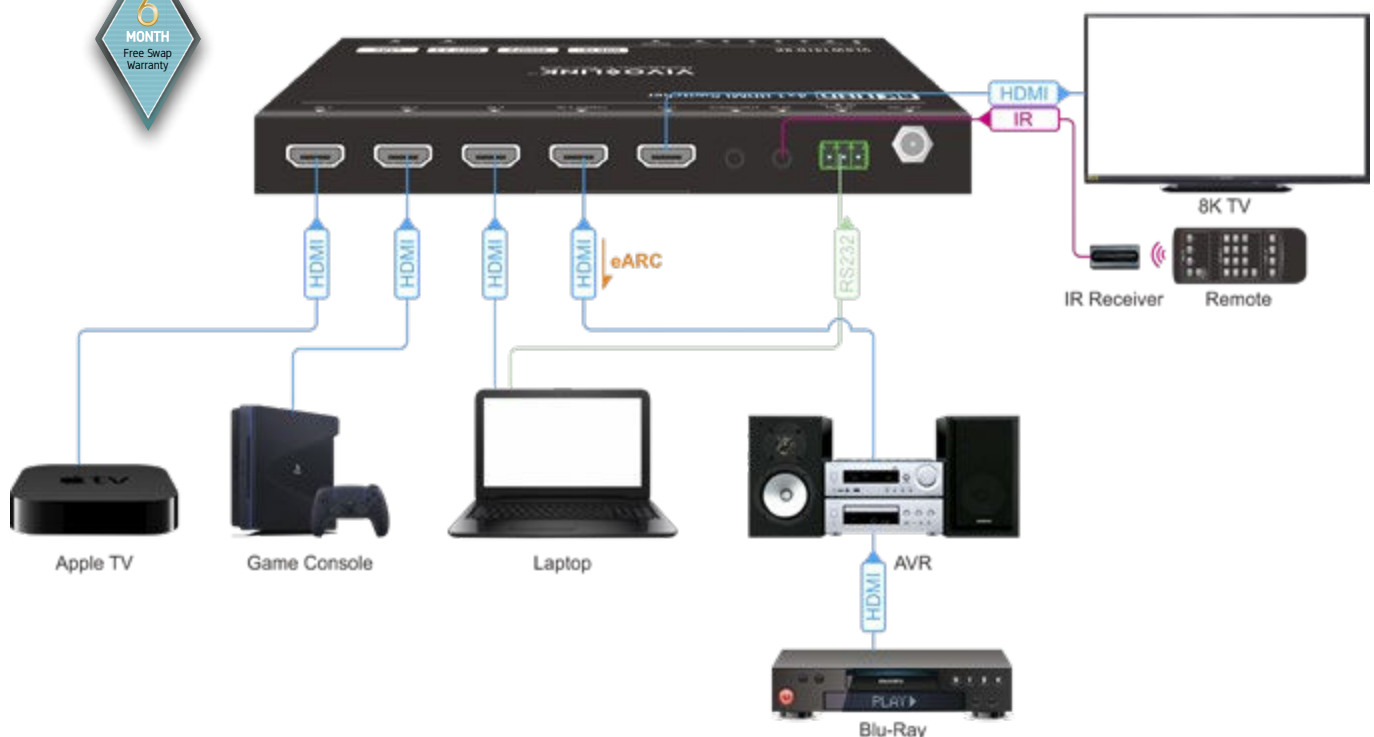

4K HDMI Video Wall Processor

1080P
FULL HD

1x4 screen or cascade
up to 16 screens

4K@60Hz 4:4:4 18Gbps


PART NO.	
Video wall processor 1x4	VLVW1X4
 For more product info click here	



Input	(1) HDMI IN
Input connector	(1) 19-pin type-A female HDMI
Resolution	Up to 4K@60Hz 4:4:4
Output	(4) HDMI OUT
Output connector	(1) 19-pin type-A female HDMI
Resolution	1920x1080p@60Hz
HDMI input version	Up to HDMI 2.0b
HDCP input version	Up to HDCP 2.2
Audio format	Supports PCM2.0
Power supply	Input: 100VAC~240VAC, 50/60Hz; Output: 12VDC 1A
Power consumption	11W (Max)
Operation temperature	-5° to +55° (+23° to +131°F)
Storage temperature	-25° to +70° (-13° to +158°F)
Relative humidity	10% to 90%, Non-condensing
Dimensions (W*H*D)	210mm x 18mm x 110mm
Net weight	550g

This Video Wall Processor has 1 HDMI input and 4 HDMI outputs. HDMI input supports resolutions up to 4Kx2K@60Hz 4:4:4 and output resolution is fixed to be 1920x1080p@60Hz. It supports 9 video wall modes, which can be selected via front panel button and IR remote.

- HDMI input up to 4Kx2K@60Hz 4:4:4
- HDCP 2.2 and 1.x compliant
- Four HDMI output resolution fixed to be 1920x1080p
- Built in automatic up & down-scaling to 1080p output
- Controlled by front panel button and IR remote
- Nine video wall modes (1x1, 1x2, 1x3, 1x4, 2x1, 3x1, 4x1, 2x2, 2x2 Rotation)
- Cascadable for larger system
- Mute & Unmute optional for audio output

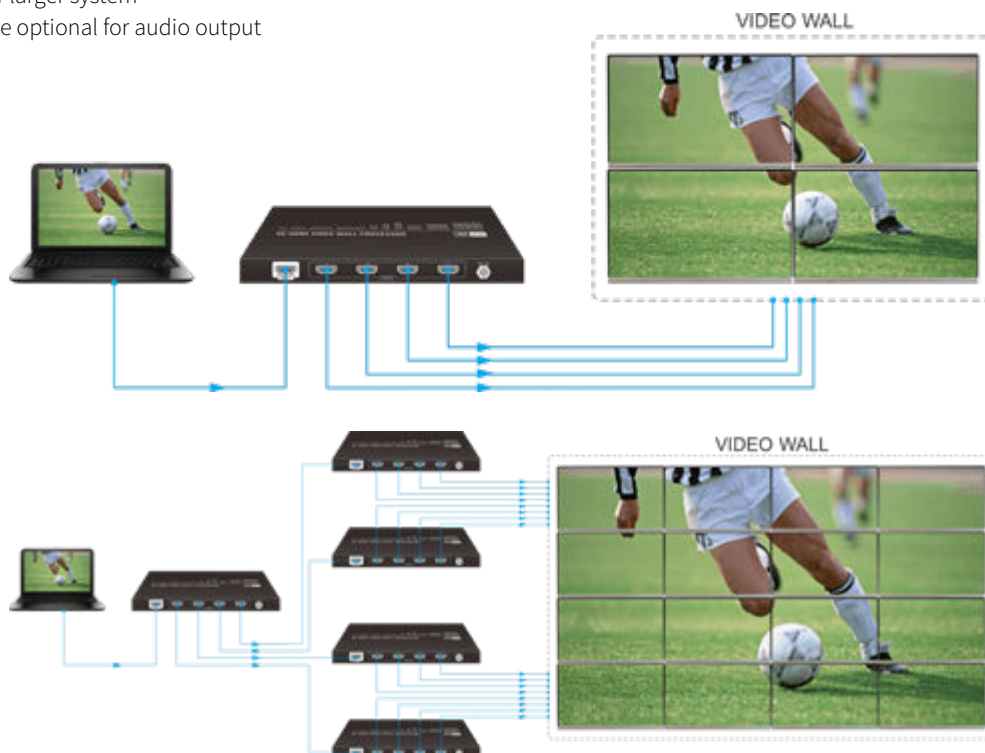

HDMI Splitter 2x8




4K@60Hz 4:4:4 18Gbps.

2 source inputs selection, 8 HDMI 2.0 HDCP 2.2 outputs, volume control and turn on/off display. Typical installations: In store for signal distribution to eight monitors and shop front demo monitors.

PART NO.	
HDMI 2x8 splitter	VLHDMISP2X8
 For more product info click here	

- HDMI 8 outputs splitter with 2 sources selection
- Supports HDMI 2.0, HDCP 2.2 compliant
- Digital Toslink and Analogue L+R for audio de-embedding
- Built-in signal equalizer, provides capability to use a longer range HDMI cable
- Comprehensive EDID management, lowest/highest resolution can be chosen on the front panel while having 14 built-in preset EDIDs for various application
- Turn ON/OFF displays and adjustable volume via CEC commands by front panel buttons
- Analogue audio out and full 4K support

Input	(2) HDMI
Input connector	(2) Female type-A HDMI
HDMI input resolution	Up to 4K@60Hz 4:4:4 8bit
HDMI standard	2.0
HDCP version	2.2
CEC	Supported
Output	(8) HDMI
Output connector	(8) Female type-A HDMI
HDMI output resolution	Up to 4K@60Hz 4:4:4 8bit
HDMI standard	2.0
CEC	Supported
De-embedded output	(1) AUDIO OUT; (1) SPDIF OUT
Output connector	(1) RCA (L/R) jack; (1) Toslink connector
HDMI audio format	LPCM 7.1 audio, Dolby Atmos®, Dolby® TrueHD, Dolby Digital® Plus, DTS:X™, and DTS-HD® Master Audio™ pass-through.
Stereo analogue L/R audio format	PCM
Toslink digital audio format	PCM, Dolby Digital, DTS, DTS-HD
Control part	(5) Control buttons; (1) EDID 3-pin DIP switch; (1) EDID 4-pin DIP switch; (1) Micro-USB port
Bandwidth	18Gbps
Power supply	Input: 100V~240V AC; Output: 12V DC 1A
Dimension (W*H*D)	324mm x 20mm x 100mm

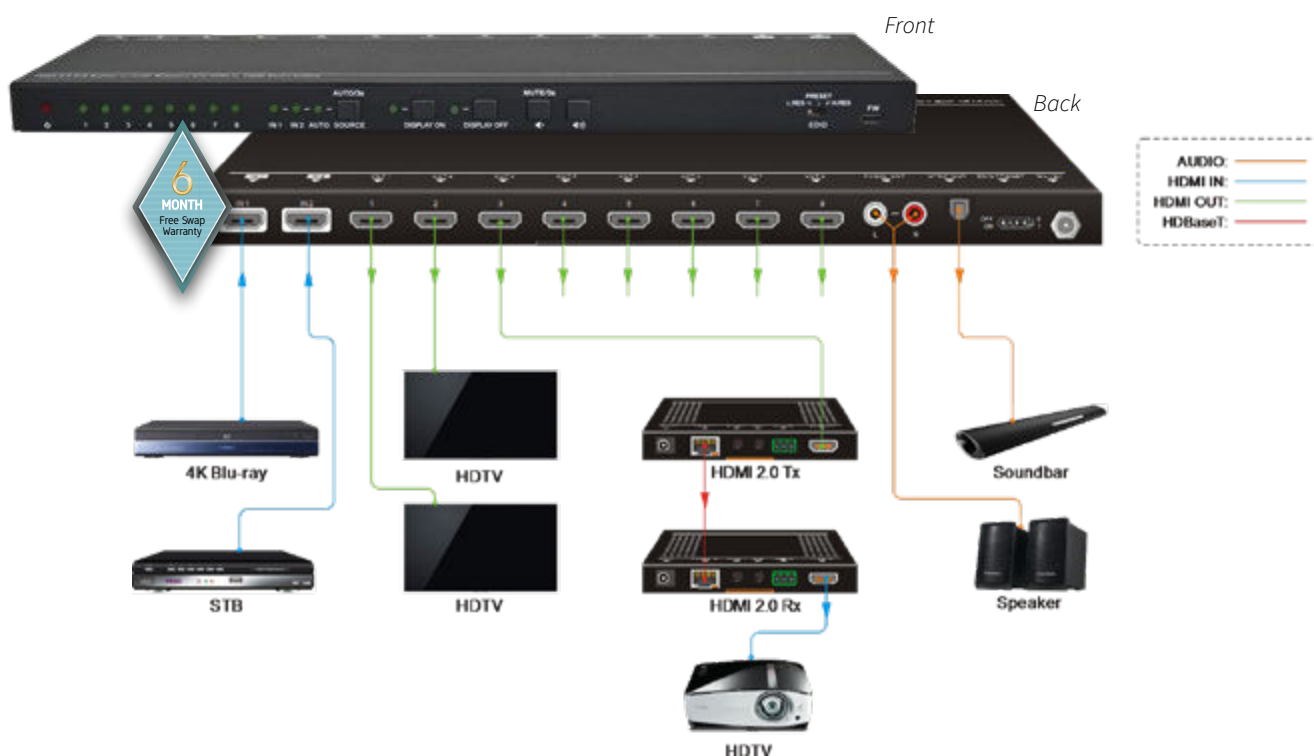

HDMI Splitter 1x4



4K@60Hz 4:4:4 18Gbps with 4K to 1080P Downscaling

VLHDMISP1X4 is an ultra slim 1x4 4K@60Hz HDMI splitter that supports different output resolution, like downscaling to 1080P on one output. Built-in equalizer for signal enhancement, 18Gbps high bandwidth.


PART NO.	
HDMI splitter 4K	VLHDMISP1X4
For more product info click here	

- Supports HDMI 2.0 and the video resolution up to 4K@60Hz 4:4:4
- HDMI input supports HDCP 2.2
- Supports video resolution down-scaling
- 18Gbps high bandwidth
- Advanced EDID management (multiple built-in EDID settings)
- Built-in equalizer for signal enhancement
- Supports CEC pass-through
- Provides LEDs to indicate the current operating status
- Firmware upgrade by Micro-USB port
- HDMI 2.0 1x2 Splitter with 4K to 1080P Down-scaling
- Built-in equalizer for signal enhancement
- 18Gbps high bandwidth

Input	(1) HDMI
Input connector	(1) Type-A female HDMI
HDMI input resolution	Up to 4K@60Hz 4:4:4 8bit
HDMI standard	2.0
HDCP version	2.2, 1.4 compliant
CEC	Supported
Output	(4) HDMI
Output connector	(4) Type-A female HDMI
HDMI output resolution	Up to 4K@60Hz 4:4:4 8bit
HDMI standard	2.0
HDCP version	2.2, 1.4 compliant
CEC	Supported
Control part	(1) EDID 4-pin DIP switch, (1) Micro-USB port
Bandwidth	18Gbps
HDMI 2.0 cable length	4K@60Hz 4:4:4 ≤ 5m, 4K@60Hz 4:2:0 ≤ 15m, 1080P ≤ 20m
Operation temperature	-10° ~ +55°
Storage temperature	-25° ~ +70°
Relative humidity	10%-90%
Power supply	Input:100V~240V AC, Output: 5V DC 1A
Power consumption	2.5W (Max)
Dimensions (W*H*D)	142mm x 17.6mm x 70.4mm
Net weight	260g

Front

Back

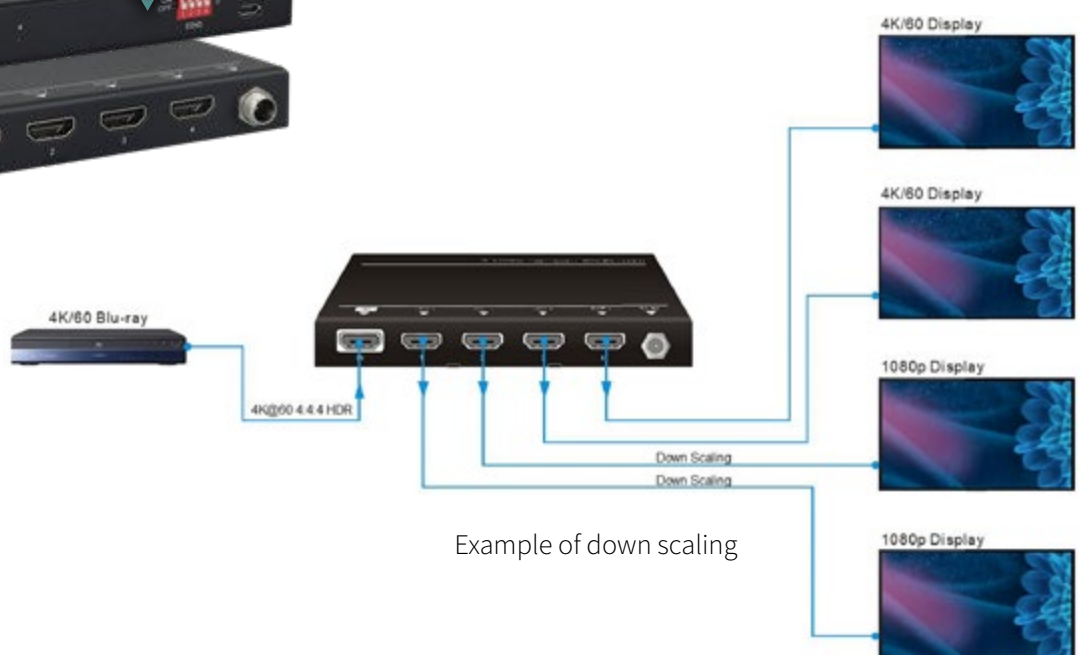

Example of down scaling

HDMI Splitter 1x4

8K@60Hz with 8K/4K to 1080P Down-scaling



VLHDMISP1X4-8K is an ultra slim 1x4 8K@60Hz HDMI splitter that supports different output resolution, like downscaling to 1080P on one output.

	PART NO.
HDMI splitter 8K	VLHDMISP1X4-8K
	For more product info click here

- Supports HDMI V2.1 and the video resolution up to 8K@60Hz 4:4:4.
- HDMI input supports HDCP 2.3 and the outputs support HDCP Active or HDCP Passive mode.
- Supports video resolution down-scaling, the 8K/4K input can be automatically degraded to 1080p output for compatibility with 1080p display.
- 48Gbps high bandwidth.
- Advanced EDID management: multiple built-in EDID and user defined settings can be selected.
- Supports ALLM, VRR and audio de-embedding
- Supports CEC pass-through.
- Provides LEDs to indicate the current operating status.
- Firmware upgrade by USB-C port

Input	(1) HDMI
Input connector	(1) Type-A female HDMI
HDMI input resolution	Up to 8K@60Hz 4:4:4 8bit
HDMI standard	2.1
HDCP version	2.3, 2.2, 1.4 compliant
CEC	Supported
Output	(4) HDMI
Output connector	(4) Type-A female HDMI
HDMI output resolution	Up to 8K@60Hz 4:4:4 8bit
HDMI standard	2.1
HDCP version	2.3, 2.2, 1.4 compliant
CEC	Supported
Control part	(1) EDID 4-pin DIP switch, (1) USB-C port
Bandwidth	48Gbps
HDMI 2.0 cable length	8K@60Hz 4:4:4 ≤ 3m, 4K@60Hz 4:4:4 ≤ 5m, 4K@60Hz 4:2:0 ≤ 10m, 1080p ≤ 15m
Operation temperature	-5° to +55°C (+23° to +131°F)
Storage temperature	-25 to +70°C (-13° to +158°F)
Relative humidity	10% to 90%, Non-condensing
Power supply	Input:100V~240V AC, Output: DC 12V 1A
Power consumption	5W (Max)
Dimensions (W*H*D)	142.0mm x 17.6mm x 70.4mm
Net weight	225g



HDMI splitter 1x2



4K@60Hz 4:4:4 18Gbps with 4K to 1080P
Down-scaling

	PART NO.
HDMI splitter	VLHDMISP1X2



For more product
info [click here](#)




VLHDMISP1X2 is an ultra slim 1x2 4K@60Hz HDMI splitter that supports different output resolution, like downscaling to 1080P on one output. Built-in equalizer for signal enhancement, 18Gbps high bandwidth.

Input	(1) HDMI
Input connector	(1) Type-A female HDMI
HDMI input resolution	Up to 4K@60Hz 4:4:4 8bit
HDMI standard	2.0
HDCP version	2.2, 1.4 compliant
CEC	Supported
Output	(2) HDMI
Output connector	(2) Type-A female HDMI
HDMI output resolution	Up to 4K@60Hz 4:4:4 8bit
HDMI standard	2.0
HDCP version	2.2, 1.4 compliant
CEC	Supported
Control part	(1) EDID 4-pin DIP switch, (1) Micro-USB port
Bandwidth	18Gbps
HDMI 2.0 cable length	4K@60Hz 4:4:4 ≤ 5m, 4K@60Hz 4:2:0 ≤ 15m, 1080P ≤ 20m
Operation temperature	-10°C ~ +55°C
Storage temperature	-25°C ~ +70°C
Relative humidity	10%-90%
Power supply	Input:100V~240V AC; Output: 5V DC 1A
Power consumption	1.5W (Max)
Dimensions (W*H*D)	96.0mm x 17.6mm x 70.4mm
Net weight	185g

- Supports HDMI 2.0 and the video resolution up to 4K@60Hz 4:4:4
- HDMI input supports HDCP 2.2
- Supports video resolution downscaling
- 18Gbps high bandwidth

- Advanced EDID management (multiple built-in EDID settings)
- Built-in equalizer for signal enhancement
- Supports CEC pass-through
- Provides LEDs to indicate the current operating status
- Firmware upgrade by Micro-USB port

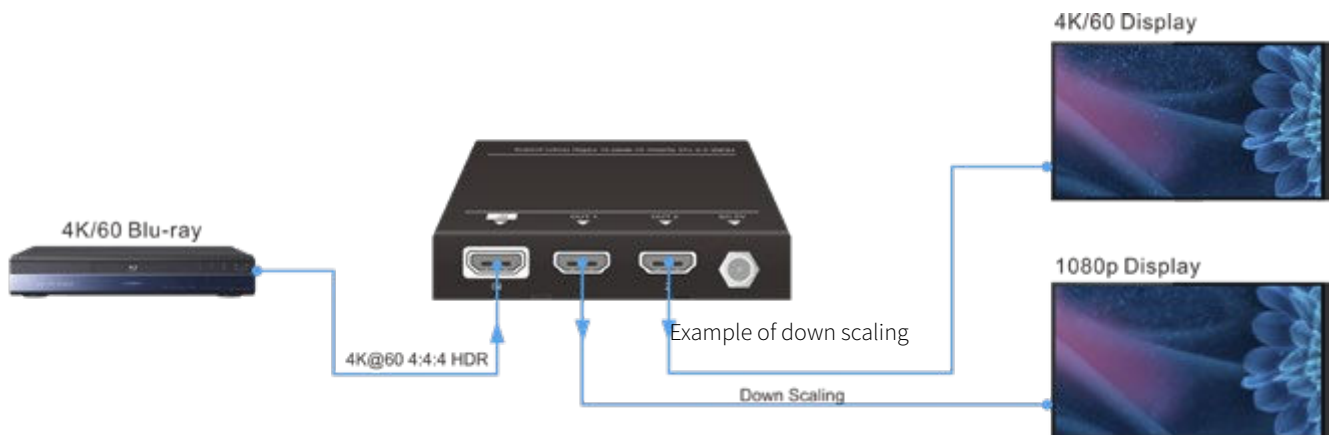

HDMI Splitter 1x2



8K@60Hz with 8K/4K to 1080P Down-scaling

	PART NO.
HDMI splitter 8K	VLHDMISP1X2-8K
	For more product info click here

VLHDMISP1X2-8K is a slim 1x2 8K@60Hz HDMI splitter that supports different output resolution, like downscaling to 1080P on one output. Built-in equalizer for signal enhancement, 48Gbps high bandwidth.

- Supports HDMI 2.0 and the video resolution up to 4K@60Hz 4:4:4
- HDMI input supports HDCP 2.3
- Supports video resolution down-scaling
- 48Gbps high bandwidth
- Advanced EDID management (multiple built-in EDID settings)
- Built-in equalizer for signal enhancement
- Supports CEC pass-through
- Provides LEDs to indicate the current operating status
- DIP switch on box to control signal source resolution
- Firmware upgrade by USB-C port

Input	(1) HDMI
Input connector	(1) Type-A female HDMI
HDMI input resolution	Up to 8K@60Hz 4:4:4 8bit
HDMI standard	2.1
HDCP version	2.3, 2.2, 1.4 compliant
CEC	Supported
Output	(2) HDMI
Output connector	(2) Type-A female HDMI
HDMI output resolution	Up to 8K@60Hz 4:4:4 8bit
HDMI standard	2.1
HDCP version	2.3, 2.2, 1.4 compliant
CEC	Supported
Control part	(1) EDID 4-pin DIP switch, (1) USB-C port
Bandwidth	48Gbps
HDMI 2.0 cable length	8K@60Hz 4:4:4 ≤ 3m, 4K@60Hz 4:4:4 ≤ 5m, 4K@60Hz 4:2:0 ≤ 10m, 1080p ≤ 15m
Operation temperature	-5 to +55°C (+23° to +131°F)
Storage temperature	-25 to +70°C (-13° to +158°F)
Relative humidity	10% to 90%, Non-condensing
Power supply	Input:100V~240V AC; Output: 12V DC 1A
Power consumption	4W (Max)
Dimensions (W*H*D)	96.0mm x 17.6mm x 70.4mm
Net weight	155g



HDBaseT Splitter



VLHDBSP1X4 is a 4K HDBaseT splitter with 4 HDBaseT plus 1 HDMI output. It distributes HDMI signal via a CAT cable up to 70m and supports PoC to receiver unit. It also supports IR control and RS232 pass-through to control the remote displays.

	PART NO.
HDBaseT splitter	VLHDBSP1X4V2
Infrared sender and receiver kit	VL120024
Receiver for VLHDBSP1X4V2	VLHDMIMAT4X444-R



For more product info [click here](#)


- Support HDMI 2.0, video resolutions up to 4K@60Hz 4:4:4
- Distribute one UHD/4K HDMI signal to four HDBaseT outputs and one loop HDMI output
- Supports cascade connection, distribute video signal to multiple video displays
- Maximum transmission distance is up to 40m for 4K, and 70m for 1080p.
- Supports video resolution down-scaling, 4K input can be automatically downgraded to 1080 output
- Supports audio de-embedding
- Each HDBaseT output supports IR pass-through
- Support RS232 and IR cascade control
- Support 24V PoC, the HDBaseT receiver can be powered by HDBaseT splitter

Input	1xHDMI (HDMI female), 1xRS232(3P captive screw connector), 1xIR (3.5mm minijack)
Output	1xHDMI (HDMI female), 4xHDBaseT (RJ45), 1xRS232 (3P captive screw connector), 1xIR (3.5mm minijack), 1xIR LOOP (3.5mm minijack), 1xRS232 LOOP (3P captive screw connector)
Gain	0dB
Bandwidth	18Gbps
Transmission distance	230ft (70m max)
Resolution	1080p, 3D & 4K
HDMI standard	Supports HDMI1.4 & HDCP
CMMR	>90dB@20Hz-20KHz
Frequency response	20Hz-20KHz
Control	IR & RS232
Power supply	24V DC; 48W
Temperature	0°C~50°C
Humidity	10%~90%
Chassis dimensions (W*H*D)	220mm x 44mm x 66mm



Back

Front

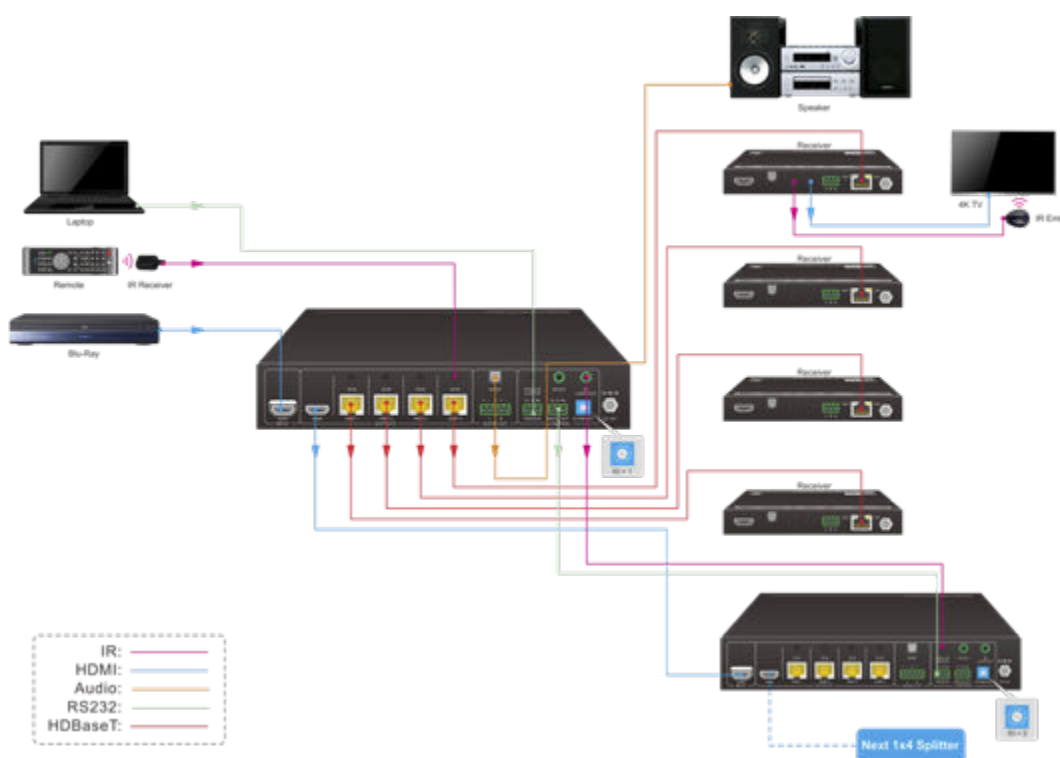

HDMI Signal Management

HDMI EDID emulator



VLHDMICTL2 is a very useful HDMI EDID manager.

VLHDMICTL2 can be used to control signal resolutions and sound settings from signal sources. The settings can easily be configured via DIP switches in the front. HDCP control via DIP switch can improve compatibility when several of the products are connected.

The CEC pass-through can be turned on/off by DIP switch.

Input	1xHDMI In (19-pin type-A female)
Output	1xHDMI Out (19-pin type-A female)
Signal standard	HDMI2.0
Bandwidth	18 Gbps
EDID management	Support pass-through EDID
Transmission distance	4K@60Hz≤15m 1080P≤20m
Dimensions (W*H*D)	59mm x 18mm x 69mm

	PART NO.
HDMI EDID emulator	VLHDMICTL2
	 For more product info click here

- Supports HDMI2.0 & HDCP2.2
- EDID management via DIP switches
- HDCP management
- CEC pass-through control
- Powered over HDMI or USB
- Optional: USB-C DC power input (not needed)



Mini HDMI Signal Generator



HDMI signal generator or display emulator

- Used as HDMI signal generator or display emulator (signal analyzer)
- Supports 4K@60Hz 4:4:4, 4K@60Hz 4:2:0, 4K@30Hz 4:4:4, or 1080p@60Hz video signal output
- HDMI input supports HDCP 2.2
- Supports HDCP OFF, HDCP 1.4 or HDCP 2.2 output.
- Supports four different test patterns for HDCP version.
- LEDs show signal and HDCP status
- USB Power cable and HDMI female to female adapter included




HDMI female/female adapter included

PART NO.	
Mini HDMI Signal Generator	VLTOOL1
 For more product info click here	



Input	(1) HDMI
Input connector	(1) HDMI
HDMI input resolution	Up to 4K@60Hz 4:4:4 8bit
HDMI standard	2.0
HDCP version	2.2, 1.4
Power input	Micro-USB port
Output	(1) HDMI
Output connector	(1) HDMI
HDMI output resolution	Up to 4K@60Hz 4:4:4 8bit
HDMI standard	2.0
HDCP version	2.2, 1.4 compliant
Control part	(1) EDID 4-pin DIP switch, (1) Micro-USB port
Operation temperature	-5°C ~ +55°C
Storage temperature	-25°C ~ +70°C
Relative humidity	10%-90%
Power supply	Input:100V~240V AC; Output: 5V DC 1A
Power consumption	2W (Max)
Dimensions (W*H*D)	75mm x 22mm x 19mm
Net weight	65g

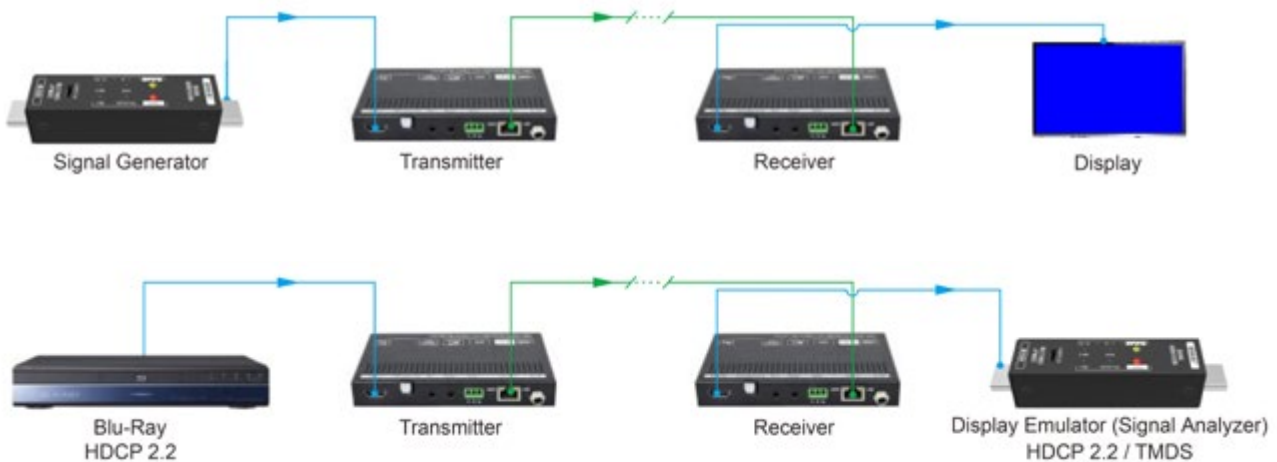


Network Serial Port Expander TCP/IP to RS232/485

Network Serial Port Expander Easily connect IP-based control systems with RS232/RS485 AV equipment. The VLEXT100 enables TCP/IP or UDP control of serial devices, making integration with modern control systems seamless.

	PART NO.
Network Serial Port Expander	VLEXT100
	 For more product info click here

- Supports RS-232/RS-485, TCP/UDP protocols
- Dual power: 12–24V DC or PoE
- Web-based setup via built-in server
- 100M Ethernet, GPIO, and IR output
- Compact metal housing with ESD protection
- Ultra-low power usage: only 0.48W

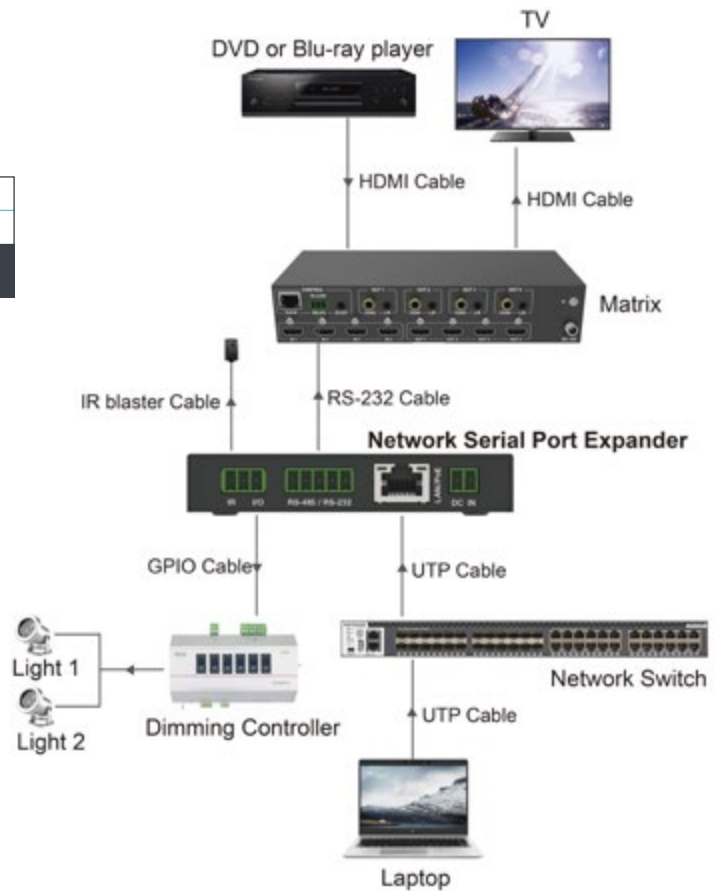

Audio

HDMI Audio De-embedder



	PART NO.
Audio de-embedder	VL120008
	For more product info click here

VL120008 is an HDMI audio de-embedder, which separates sound from the HDMI source. Audio out via RCA, balanced audio and Digital Coax (SPDIF)

Typical installation:

Box is used to separate sound from HDMI signal. E.g. picture to monitor and sound to audio system / active speakers like VLSP60AW.

- Ultra HD 4K (3840 x 2160@30Hz) and 1080p Full HD
- Re-clocking and re-shaping HDMI signal
- Supports: HDMI/MHL dual mode input (input 1)
- 1xHDMI output + Audio analogue/SPDIF output
- Supports audio formats: PCM, Dolby Digital and DTS Digital Surround




Back



Front

Input	1xHDMI
Input connector	1x19-pin type-A female HDMI 2.0, HDCP2.2
Output	1xHDMI
Output connector	1x19-pin type-A female HDMI 2.0, HDCP1.4
Output	1xStereo balanced audio L/R; 1xAnalogue audio L+R; 1xCOAX
Output connector	1x5-Pin phoenix connector; 1xRCA; 1xCoaxial audio connector
Audio format	Support Dolby D (True HD)/ DTS (HD-Master Audio)/ PCM
Max data rate	18Gbit/s
Max resolution	4K@60Hz 4:4:4
Temperature	-10°C~55°C
Reference humidity	10%~90%
Power consumption	3W (max)
Power supply	Input: 100VAC~240VAC, 50/60Hz; Output: 12VDC 1A
Dimensions (W*H*D)	129mm x 21.5mm x 77mm
Net weight	244g

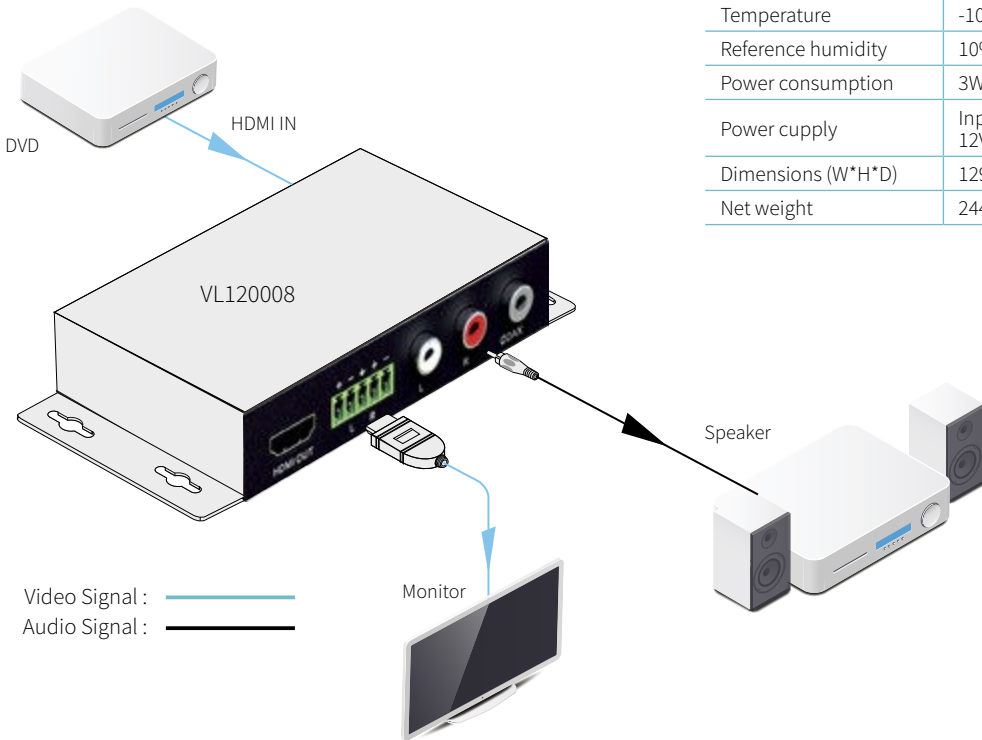

Audio Extender Kit

PART NO.	
Audio extender kit	VLEXTA170
	For more product info click here

VLEXTA170 is an audio extender, including transmitter & receiver. It distributes audio signal via CAT cable at 100m with PoC function from Rx to Tx. It provides TOSLINK/COAX/STEREO audio inputs.




Front

Back

Input	1xTOSLINK, 1xCOAX, 1xSTEREO
Output	1xTP (RJ45), connected to TP IN of RX
Input	1xTP (RJ45), connected to TP OUT of TX
Outputs	1xTOSLINK, 1xCOAX, 1xL+R
Digital audio format	Dolby D (True HD)/ DTS (HD-Master Audio)/ PCM
Channel count	From 2-8 (2.0 to 7.1)
Sample rates	32 kHz, 44.1 kHz, 48 kHz, 88.2 kHz, 96 kHz, 176.4 kHz and 192 kHz
Analogue audio format	Supports stereo mode
Audio input selection	DIP switch for three mode
Transmission distance	100m
PoC	RX to TX
Temperature	0°C~ +50°C
Humidity	10%~90%
Power supply	Input: 100VAC~240VAC, 50/60Hz. Output: DC 12V, 1A
Chassis dimension (W*H*D)	TX: 88mm x 21.5mm x 80mm RX: 88mm x 21.5mm x 80mm

- 3 selectable audio inputs
- Power over Cable (PoC), from Rx to Tx
- 100m audio transmission
- 3 audio synchronized outputs

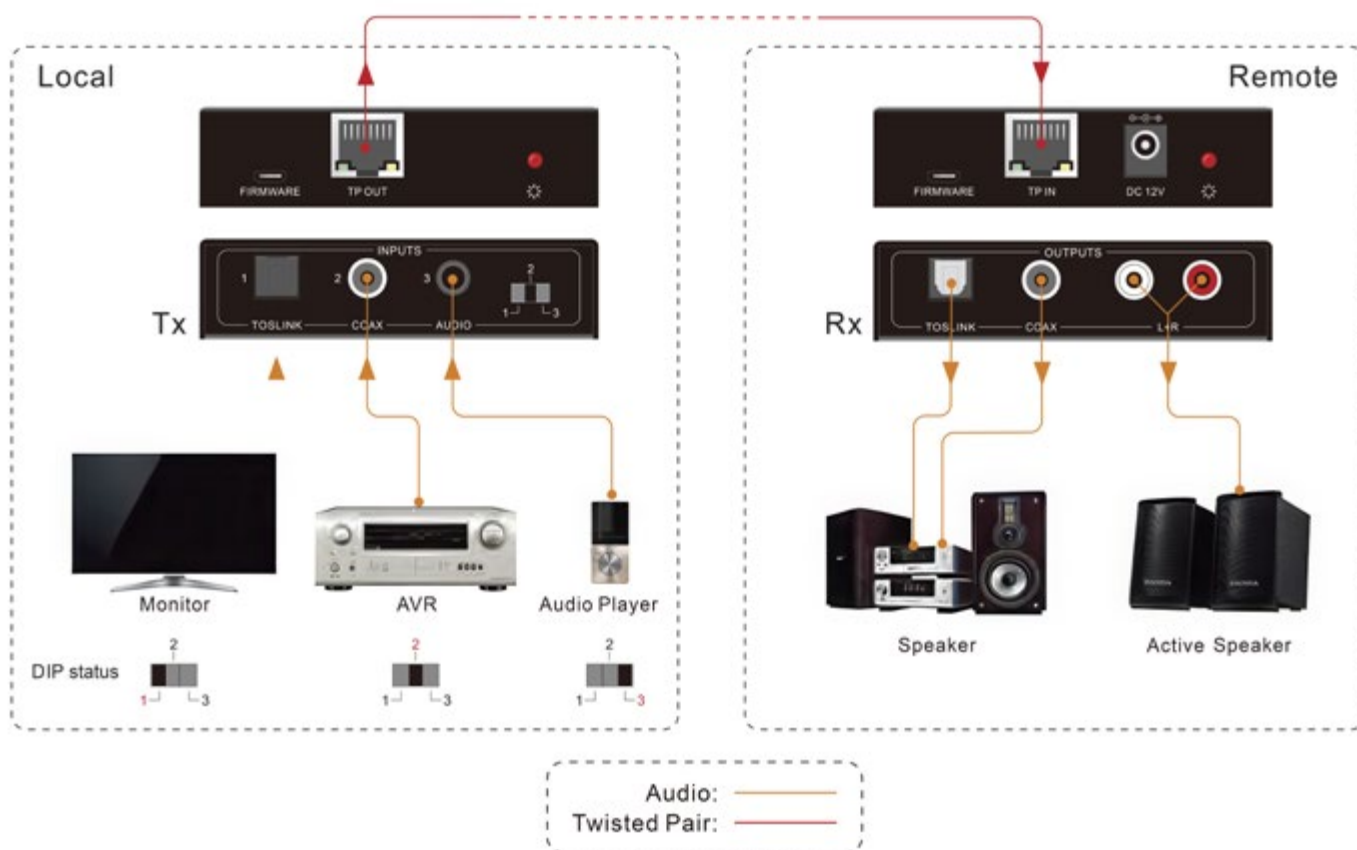


Audio Amplifier 2x50W

VL120005 is a digital amplifier with 3 inputs. With 2x 50W@8 Ohm as default output, it can also be switched to 1x 100W@4 Ohm by bridge connection.

- 2 analogue and 1 optical digital inputs
- Stereo and bridge output modes selectable
- Bass, Treble & Volume adjustable
- Loop output to cascade to another amplifier
- Locking power connector
- Controlable via buttons; RS232, IR and TCP/IP

	PART NO.
Audio amplifier 2x50W	VL120005
	 For more product info click here

Audio input	2 stereo (L+R RCA, 3.5mm jack) >10K Ω 1 digital audio (SPDIF fiber connector)
Audio output	1 amplifier (4P captive screw connector) 1 stereo loop out (3.5mm jack)
Output type	Constant resistance 4 Ω /8 Ω
Power output	2x50W / 1x100W (bridge)
Voltage gain	32dB
Frequency response	20Hz~20KHz
CMRR	>80dB@20Hz to 20KHz
SNR	85dB (max)
Stereo channel separation	>80dB@20Hz to 20KHz
Bandwidth	20Hz~25KHz
THD+noise	<0.01%@1KHz
Control	Buttons, RS232, TCP/IP, optional IR remote
Power supply	DC33V, 4A
Chassis dimension (W*H*D)	148mm x 44mm x 160mm

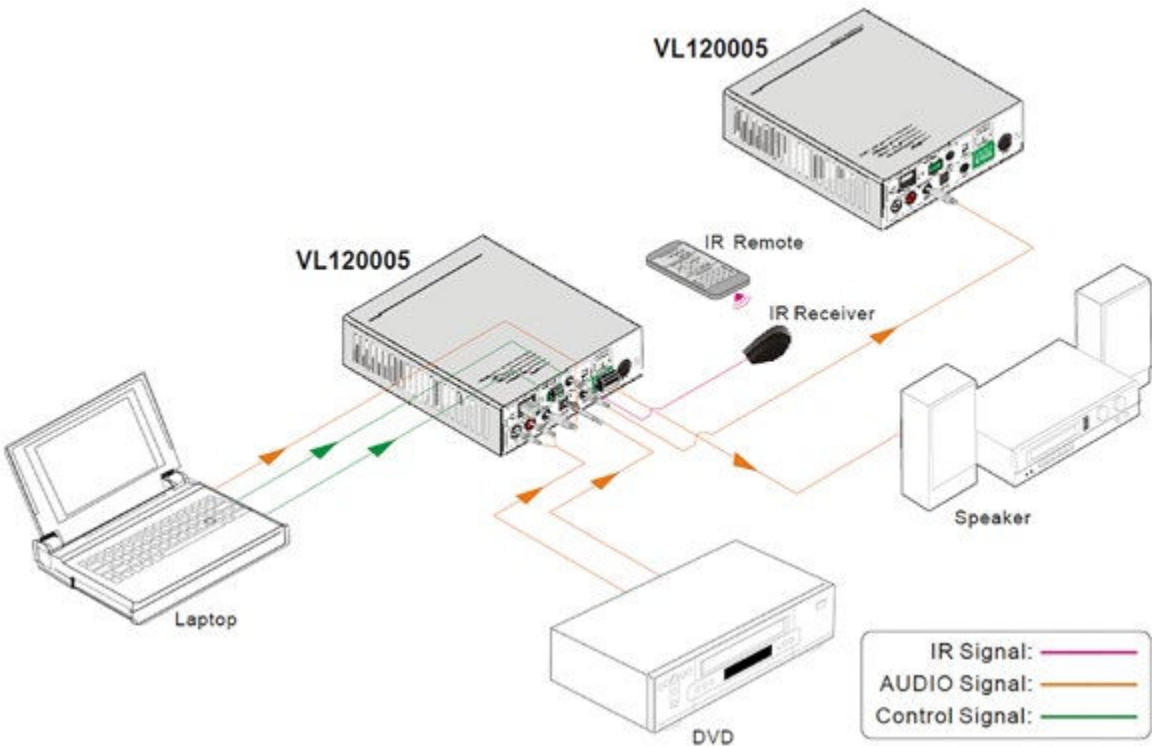

Audio Amplifier 2x20W

VL120004 is a digital amplifier (Class-D) with 2 line & 1 microphone inputs, which supports EQ control and microphone mixing. With 2x 20W@4 Ohm as default output, it can be switched to 1x40W@8 Ohm by bridge connection.

	PART NO.
Audio amplifier 2x20W	VL120004
IR Kit	VL120004 IR KIT
	For more product info click here

- 2 switchable analogue audio inputs
- One 3-level microphone input with mixer function
- Stereo, Dual mono & Bridge output mode selectable
- Bass, Treble & Volume adjustable
- Loop output to cascade to another VL120004
- Locking power adapter
- Controlable via button, RS232 (optional IR via IR-VL120004)


Back



Front



Audio input	2 stereo (L+R RCA, 3.5mm jack) 1 microphone (3P captive screw connector)
Audio output	1 amplifier (4P captive screw connector) 1 stereo loop out (3.5mm jack)
Output type	Constant resistance 4Ω/8Ω
Power output	2x20W / 1x40W (bridge)
Voltage gain	32dB
Frequency response	20Hz~20KHz
CMRR	>70dB@20Hz to 20KHz
SNR	80dB (max)
Stereo channel separation	>75dB@20Hz to 20KHz
Bandwidth	20Hz~25KHz
THD+noise	<1%@1KHz
Control	Buttons, RS232, optional IR remote
Power supply	DC24V, 2.5A
Chassis dimension (W*H*D)	96mm x 38mm x 87mm

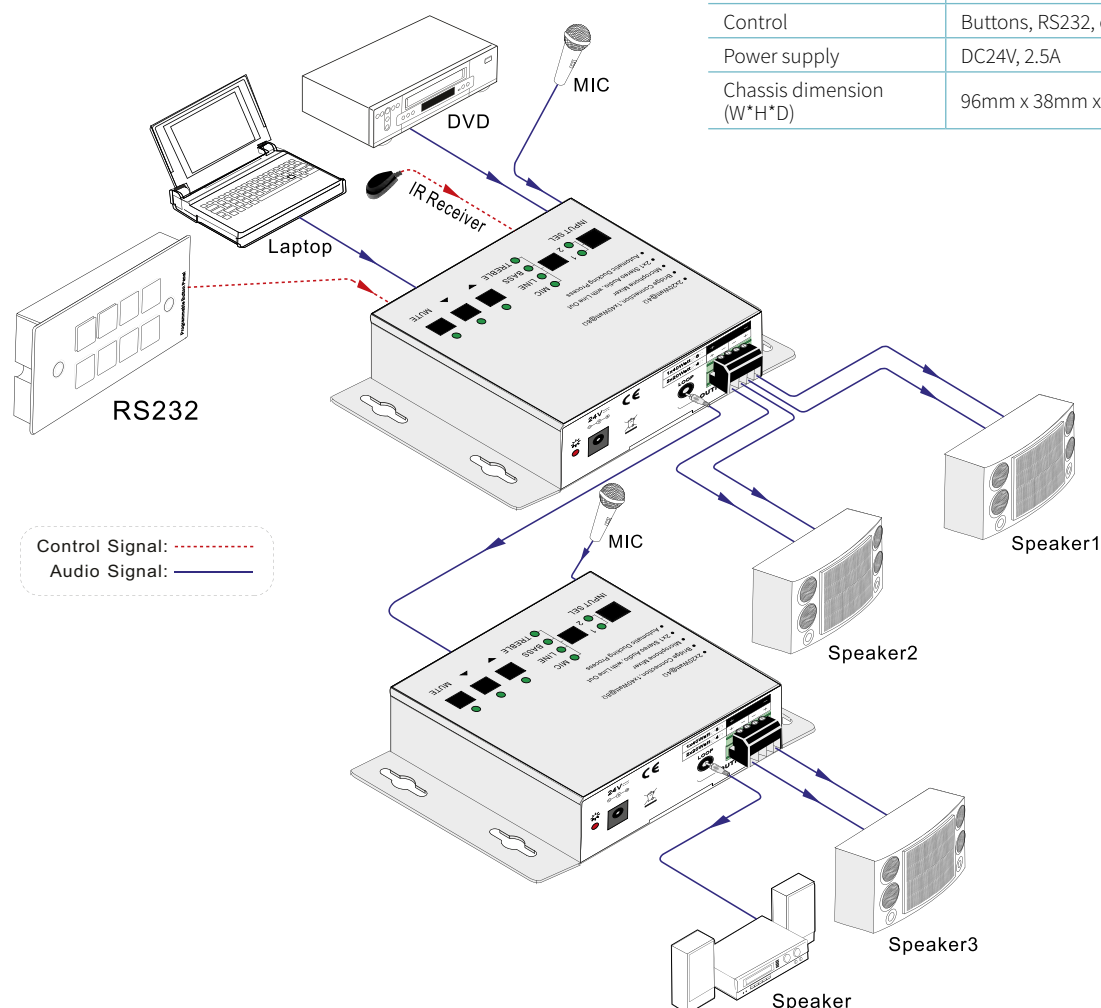





Speaker Wall Mount

Vivolink speaker mount is a universal wall mount for speakers up to 15kg. The clamps are with rubber, and speaker is securely fixed to the mount with a side tension screw. There are optional screw holes in the mount so the speaker can be secured with a screw. There are two mounts in the box.

	PART NO.
Speaker Wall Mount set	VLMS15
 For more product info click here	

- Fit speakers with widths from 135mm to 275mm
- Weight up to 15kg
- Colour: black
- Material steel
- Tilt range: +8°~-8°
- Swivel range: +90°~-90°

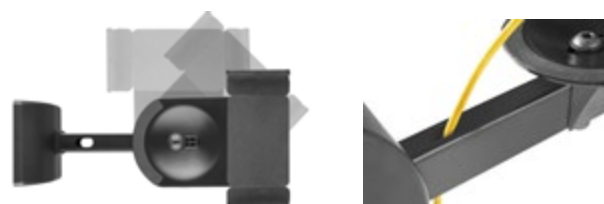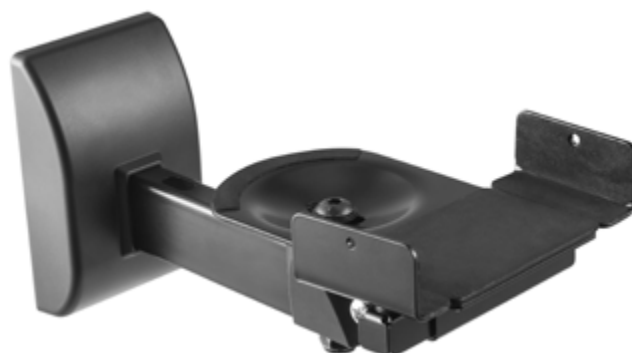

Minijack stereo [3,5mm] 2 x XLR male

Suitable for speaker VLSP70

	PART NO.
Minijack stereo [3,5mm] 2 x XLR male 10m	PROMJXLR10
Minijack stereo [3,5mm] 2 x XLR male 15m	PROMJXLR15
 For more product info click here	





Mount suitable for Sonos ERA series

This wall mount is designed exclusively for Sonos Era, providing an ideal audio experience from every corner of the room. Its tilting and swivel angle adjustability provides the users with an optimal listening angle.

Effortless installation and cable management ensure a seamless, clutter-free look that blends with any home decor while taking your Sonos Era to new auditory heights.

Typical places for installation:

- Living room
- Board room
- Cantina
- Meeting rooms



Typical places for installation:

- Living room
- Board room
- Cantina
- Meeting rooms



PART NO.	
Wall mount for Sonos ERA100 white	VLMS-P-E100W
Wall mount for Sonos ERA100 black	VLMS-P-E100B

 For more product info [click here](#)

PART NO.	
Wall mount for Sonos ERA300 white	VLMS-P-E300W
Wall mount for Sonos ERA300 black	VLMS-P-E300B

 For more product info [click here](#)



Floor stand suitable for Sonos ERA series



	PART NO.
Floor stand for Sonos ERA100 white	VLFSPP-E100W
Floor stand for Sonos ERA100 black	VLFSPP-E100B

 For more product info [click here](#)



	PART NO.
Floor stand for Sonos ERA300 white	VLFSPP-E300W
Floor stand for Sonos ERA300 black	VLFSPP-E300B

 For more product info [click here](#)



Vivolink X10

Bring Sound to Life.
Unleash powerful sound
wherever you go

	PART NO.
X10 Bluetooth Portable Speaker	X10
	 For more product info click here

- 60W powerful audio output
- 80Hz–18kHz frequency response
- Up to 8 hours playtime (varies by volume and content)
- Bluetooth 5.0 connectivity
- USB-C fast charging, approx. 3 hours
- 1.22 kg portable and durable design

The Vivolink X10 is a compact yet powerful portable speaker designed to deliver rich, dynamic audio wherever you go. With a strong 60W output and an 80Hz–18kHz frequency response, it provides clear highs, detailed mids and deep, energetic bass. Bluetooth 5.0 ensures stable and efficient wireless connectivity, while the built-in lithium-ion battery offers up to 8 hours of playtime depending on volume and content. Fast USB-C charging brings the unit back to full power in approximately 3 hours. Weighing just 1.22 kg, the X10 combines durability, portability and high-quality sound for indoor and outdoor use.

Vivolink X10 – your sound, anywhere.



X10
Bring Sound to Life

Studio Active Speaker

Vivolink Studio 70 is a 2-way, bi-amplified studio grade speaker that delivers crystal clear and detailed sound for high-end installations. The XLR balanced input and Jack input opens up for many type of installations and usage.


Typical usage:

- Luxurious board rooms
- Sport bars
- Home theatre
- Studios



	PART NO.
Studio 70 Active Speaker	VLSP70
	 For more product info click here

- 70W Peak
- 2-way bi-amplified studio grade speaker
- Woofer 5.25" fiberglass cone
- Tweeter 1" neodymium soft dome
- Frequency Range: 55Hz-20kHz
- Colour: Black
- Input: XLR (3pin), 6,35mm/1/4" TSR 10Kohm balanced/unbalanced
- Magnetically shielded: Yes
- Dimensions (HxWxD): 277mm x 186mm x 254mm

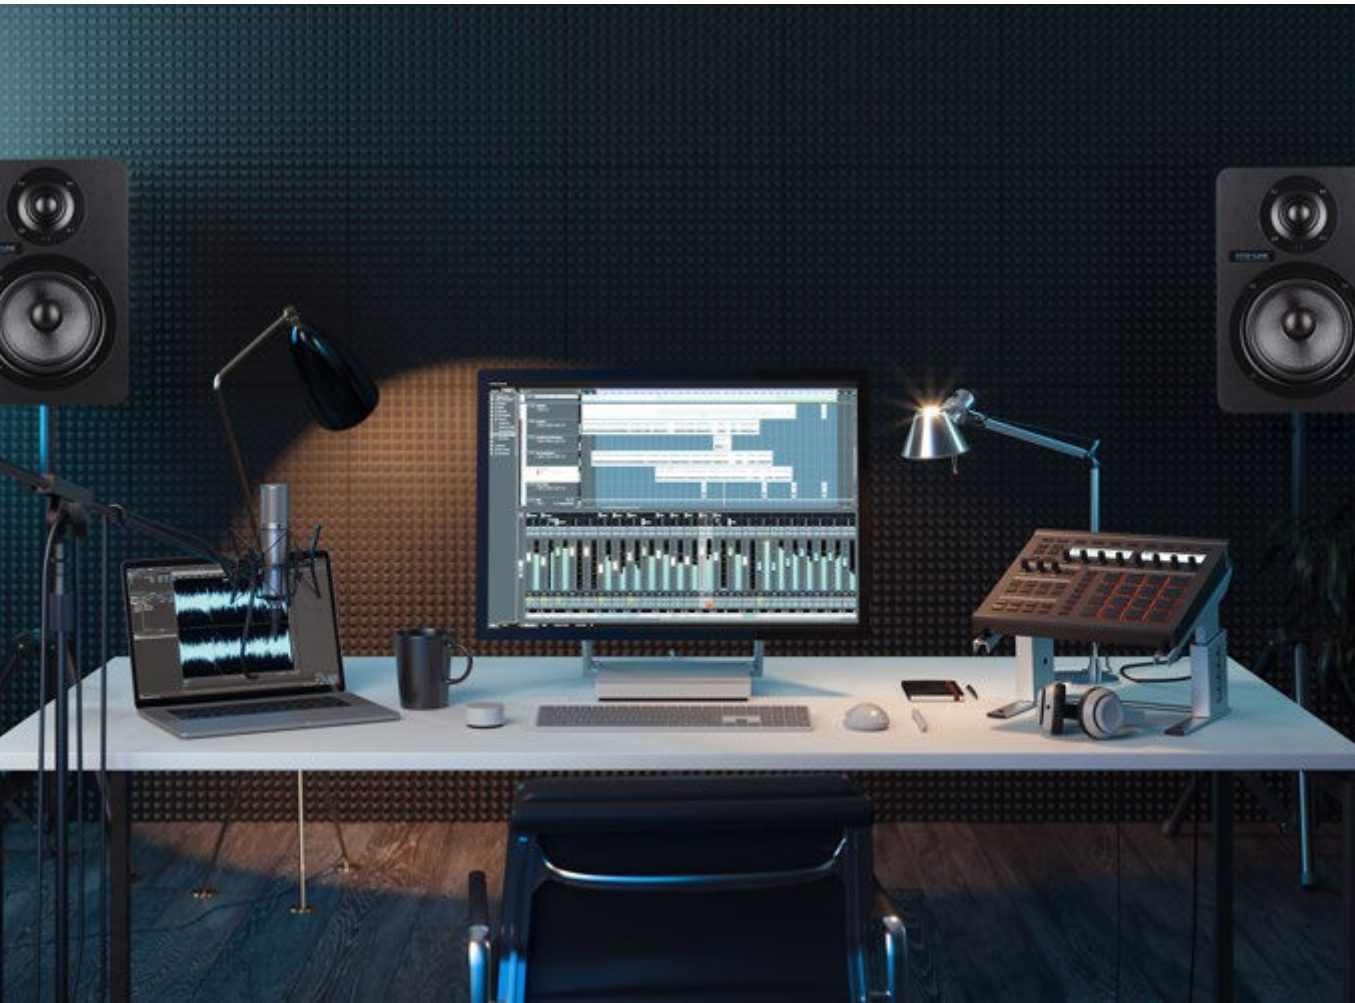

Active Speaker Sets

Vivolink Active Speaker Set is ideal for meeting rooms, schools and auditoriums.



PART NO.	
Active Speaker Set 50W	VLSP61AW
 For more product info click here	

- Power capacity: 2x50Watts
- 2-way active speaker
- For rooms up to 80m²
- Frequency range: 80Hz-20kHz
- Impedance: 8 Ohm
- Sensitivity: 90dB
- Woofers: 6½" polypropylene cone
- Tweeter: 1"
- Colour: White
- Magnetically shielded: No
- Mounting: U-bracket
- Standby mode
- Dimension (HxWxD): 288mm x 215mm x 193mm



PART NO.	
Active Speaker Set 30W White	VLSP65AW
 For more product info click here	

- Power capacity: 2x 30Watts
- 2-way active speaker
- For rooms up to 50m²
- Frequency Range: 80Hz-20kHz
- Impedance: 8 Ohm
- Sensitivity: 90dB
- Colour: White, Black
- Woofers: 6½" polypropylene cone
- Tweeter: 1"
- Magnetically shielded: No
- Mounting: U-bracket
- Standby mode
- Dimensions (HxWxD): 288mm x 215mm x 193mm



PART NO.	
Active Speaker Set 30W Black	VLSP65AB
 For more product info click here	

Same specifications as VLSP65AW, in black colour.



PART NO.	
Active Speaker Set 30W White	VLSP60AW
 For more product info click here	

- Power capacity: 2x30Watts
- 2-way active speaker
- For rooms up to 50m²
- Frequency range: 100Hz-20kHz
- Impedance: 4 Ohm
- Sensitivity: 88dB
- Woofers: 5¼" polypropylene cone
- Tweeter: ½"
- Colour: White
- Magnetically shielded: Yes
- Mounting: U-bracket
- Standby mode
- Dimensions (HxWxD): 240mm x 178mm x 162mm

Weather-Proof Speaker – Can be used indoor and Outdoor

The Vivolink Weather-Proof Speaker delivers balanced, detailed sound from its sleek 2-way 6.5" design. Its IP65-rated cabinet ensures reliable performance in covered outdoor areas, while its clean look fits perfectly indoors in cafés, cantinas, or living rooms. Easy to mount and built for consistent, even coverage—Vivolink brings professional audio to any space. Can be mounted in ceiling or on the wall.

- IP65 class cabinet
- 2-Way 6.5" wall mount speaker
- Frequency response: 50Hz - 20kHz
- Woofer: 6.5" polypropylene
- Tweeter: 1" silkdome
- Power: 40W @ 8 ohm
- Transformer tapings: 40W/30W/20W10W(100V)
- Sensitivity: (1W/1m): 87 dB SPL
- Grill feature: aluminum grill
- Dimensions: 290 x 204 x 202mm (dimension without bracket)
- Dispersion angle: 120°
- Weight: 2.9kgs

PART NO.	
Active Subwoofer 50W	VLSPD60B
 For more product info click here	



Active Subwoofer 50W

Vivolink Active Subwoofer is a perfect match to all Vivolink speakers. It is designed to be mounted over ceiling or under furniture.

Ideal for meeting rooms, hotels and auditoriums.

- For rooms up to 200m2
- Power effect for subwoofer: 50 Watts
- Power effect for passive ceiling speakers: (VLSPMTC60WT) 2x25Watts
- Inputs: 100V, Balanced in and RCA line in
- Outputs: RCA line out and Speaker out 2x 25W
- Line out for active speakers (VLSP60/65/61/70)
- Frequency range: 80Hz-20kHz
- Impedance: 8 Ohm

PART NO.	
Active Subwoofer 50W	VLSPSUB100
 For more product info click here	

Power supply	AC230V, 50Hz
Amplifier	Class D
Standby function	Yes
Frequency response (Subwoofer)	40Hz-200Hz
Frequency response (Satelite)	80Hz-20KHz
Power Handling@8Ohm	RMS 50W (Subwoofer) Mono
Power Handling@8Ohm	RMS 2x25W (Surround) Stereo
Crossover	50Hz to 200Hz(Subwoofer)
Phase	0/180° (Subwoofer)
Controls	Crossover, Phase, Bass, Treble
2 x Volume control	Sattelite speakers & Subwoofer
Subwoofer	8"
Impedance	8 Ohm
Dimension without mounting	540x400x140mm
Dimension with mounting bracket	540x416x163mm



Ceiling Speakers 2-Way low impedance or 100v input

Vivolink 2-way 100V frameless ceiling speakers with magnetic grill. Easy to install. This discreet and stylish loudspeaker has a 6.5" PP cone woofer and 0.5" tweeter. It can be used as 100V volume tappings and an 8 Ohm option.

Mount into suspended or false ceilings using the 4 "dog-ear" mounts to achieve a discreet, high-quality sound installation.

- 6.5" 2-way magnet grill ceiling speaker
- **Speaker diameter/height: 224mm x 92mm**
- Transformer: 20W-15W-10W-8 Ohm/100V
- Easy to install
- Tweeter can be adjusted in all directions
- Ideal for commercial sound applications



VLSMTC60WT

	PART NO.
Ceiling Speakers set	VLSMTC60WT
Ceiling mount re-enforcement	VLSMTC-mount
	 For more product info click here

VLSMTC-mount



Vivolink In-Ceiling Speaker with Backbox

Ideal for commercial audio installations. The integrated backbox delivers rich, powerful bass, while the adjustable tweeter ensures precise sound direction and optimal coverage.

- 2-Way 6.5" in-ceiling speaker with plastic back can
- Frequency response: 45Hz - 20kHz
- Woofer: 6.5" polypropylene and Tweeter: 1" silk dome
- Transformer tapping's: 40W/20W/10W/ 5W/2.5W(100V/70V)
- Power: 40W @ 8 ohm
- Grill feature: Frameless magnetic grill
- Plastic back cover (back can) included
- **Dimensions: Diameter/Height: 232mm x 170 mm**
- Tweeter can be adjusted in all directions
- Ideal for commercial sound applications
- Color: white

	PART NO.
Ceiling Speaker one pcs.	VLSPMTC60TC
 For more product info click here	



Vivolink In-Wall Speaker pair

Deliver rich, powerful sound with a sleek, discreet design. Perfect for living rooms, boardrooms, and commercial spaces where high-quality audio should be heard—not seen.

- 2-Way 6.5" in-wall speaker
- Frequency response: 45Hz - 20kHz
- Woofer: 6.5" Kevlar cone
- Tweeter: 1" titanium dome tweeter
- Power: 40W @ 8 ohm
- Sensitivity: (1W/1m): 89 dB SPL
- Grill feature: Frameless magnetic grill
- **Dimensions: 320 x 220 x 102mm**
- Color: white
- Weight: 2.2kgs

	PART NO.
In-Wall Speaker pair (two pcs.)	VLSPIW60W
 For more product info click here	





Vivolink AudioPack

Complete audio solution bundle for professional installations

	PART NO.
1 x Active Subwoofer and Two Ceiling speakers	AUDIOPACK2
1 x Active Subwoofer and Four Ceiling Speakers	AUDIOPACK4
Ceiling mount re-enforcement	VLSPMTC-mount
	 For more product info click here

- Includes 1x Active Subwoofer 50W (VLSPSUB100) and 2x or 4x 6.5" Ceiling Speakers (VLSPMTC60WT)
- Perfect match for meeting rooms, hotels, classrooms, and auditoriums up to 200m²
- Subwoofer delivers 50W mono power and 2x25W stereo output for passive ceiling speakers

- Frameless ceiling speakers with magnetic grills and adjustable tweeters
- Supports both 100V volume tapings (20/15/10W) and 8 Ohm operation
- Multiple inputs: RCA line-in, balanced input, and 100V input – plus RCA line-out for expansion
- Designed for mounting above ceilings or discreet placement under furniture
- Optional accessories: Speaker cable and ceiling mount reinforcement (VLSPMTC-mount)



Meetings Made Easy

4K in-line HDMI controller



Makes presentations easy

	PART NO.
HDMI in-line controller	VLHDMICTL1-MME
	For more product info click here


Enter meeting room or connect cable to your computer and everything starts up automatically for you. And when you leave the room everything switches off for you. Truly automated, simple operation supporting 4K resolution.

In detail: When you enter the room, the projector/monitor will turn on and the screen will go down. When you leave the room, the projector/monitor will turn off and the screen will go up again.

- 18G in-line HDMI controller
- Designed for automatic system control in small meeting rooms and huddle spaces
- Supports up to 4K@60Hz 4:4:4 HDR10 and Dolby Vision, HDCP 2.2 compliant
- HDCP pass-through or converted to HDCP 1.4 for better compatibility
- Supports 4K and 1080p down-scaling
- Comprehensive EDID management with 8 EDID Options (Including Auto & HDR) for various application
- Automation display control via CEC, RS-232 and IR
- Contact closure input for connections with a variety of devices, such as sensor and switch
- Relay control for device like projection screen
- Built-in signal equalizer, provides capability to use longer range HDMI cable



Front

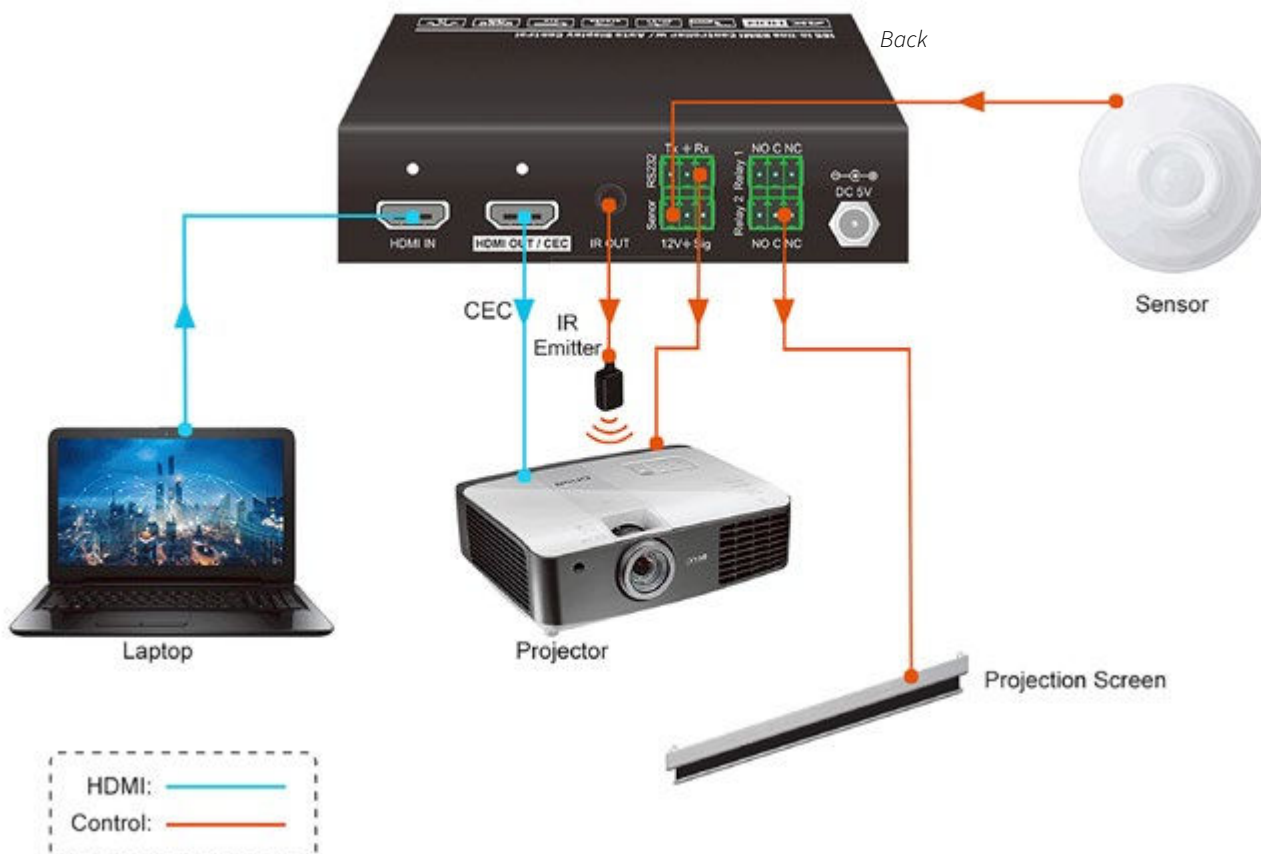

Control Module & Wall Plates

VLCP8B is a centralised module to control projector, LCD monitors and other devices.

Users can add RS232 sync code into the module through computer software, or choose IR learning - or copy the programme by the module copy function.

The 8 keys on the module can be set individually.

The number of keys could be increased by extending the panel and meet the requirements for multi-devices control.




USB connector to support RS232 code sync or copy

Key function label (changeable)

Keys set individually

IR learning on the front

- 1x USB support software sync
- DC12V power
- Number of keys can be increased to 16 with two panels
- 8 keys on the module can be set individually
- Controlling mode: IR, RS232, RS485, 12V controlling for different devices

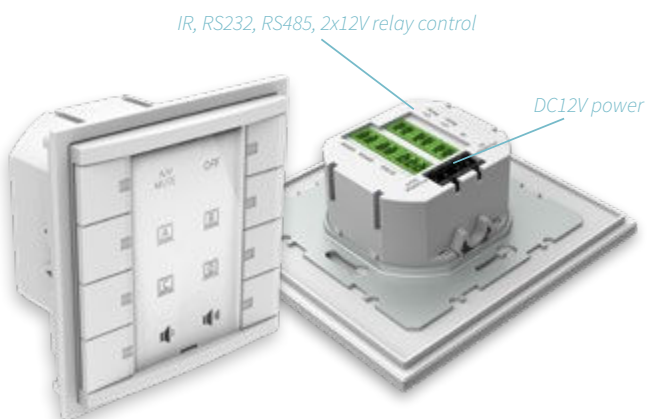

PART NO.	
Control module	VLCP8B



For more product info [click here](#)

The box contains:

- Controller
- Plastic frame installed with controller
- Power supply: 12V/0.5A with 1.5m cable
- 5M power transfer cable used between two controllers
- 10M IR cable
- 15M RS232 cable male plug
- USB cable
- User manual
- Software on USB stick



Accessories

	PART NO.
Extra plexiglass front as sparepart	VLCP8B-PLEXIGLASS
RS232 - Phoenix Cable 15M	VLCPARS232/15M
RS232 - Phoenix Cable 25M	VLCPARS232/25M

	PART NO.
Surface-Mount Wallbox 8x8	1845637
Flush-Mount Wallbox	5586150
Dual Flush-Mount Wallbox (when two control panels are mounted)	5586155
Frame for wallbox	1845601

Wall Plates & Wall Boxes



WI221268

- DisplayPort cable length: 20cm

	PART NO.
DisplayPort wall plate	WI221268
DisplayPort + Thorsmann Wall Box	WI221196

 For more product info [click here](#)



WI221273

- HDMI 2.0 cable length: 15cm

	PART NO.
HDMI wall plate	WI221273
HDMI + thorsmann wall box	WI221184
HDMI + thorsmann wall box with HDMI amplifier	WI221184-AMP

 For more product info [click here](#)



WI221275

- USB 2.0 cable length: 15cm

	PART NO.
USB 2.0 A-A wall plate	WI221275
USB 2.0 A-A + thorsmann wall box	WI231275

 For more product info [click here](#)



WI221276

- HDMI 2.0 cable length: 15cm
- 3.5mm cable length: 20cm

	PART NO.
HDMI and Audio 3.5mm wall plate	WI221276
HDMI and Audio 3.5mm + thorsmann wall box	WI221170

 For more product info [click here](#)



WI221270

- HDMI 2.0 cable length: 15cm
- VGA cable length: 25cm
- 3.5mm cable length: 20cm

	PART NO.
HDMI, VGA and Audio 3.5mm wall plate	WI221270
HDMI, VGA and Audio 3.5mm + thorsmann wall box	WI221192

 For more product info [click here](#)



	PART NO.
Outlet Panel for 2 x Keystone	WI221266

 For more product info [click here](#)



WI221279

- USB 3.0 cable length: 16.5cm

PART NO.	
USB 3.0 A-A wall plate	WI221279
USB 3.0 A-A + thorsmann wall box	WI221185

For more product info [click here](#)



WI221267

- HDMI 2.0 cable length: 16.5cm
- DisplayPort cable length: 16.5cm

PART NO.	
DisplayPort, HDMI	WI221267
DisplayPort, HDMI + thorsmann wall box	WI221292

For more product info [click here](#)



WI221295

- HDMI 2.0 cable length: 15cm
- USB 3.0 cable length: 15cm

PART NO.	
HDMI, USB 3.0 wall plate	WI221295
HDMI, USB 3.0 + thorsmann wall box	WI221261

For more product info [click here](#)



WI221293

- HDMI 2.0
- USB 2.0
- VGA
- 3.5mm audio
- Measure: 86x86x34mm
- Incl. wall box

PART NO.	
Wall connection + wall box	WI221293

For more product info [click here](#)





VLCAM100 Ultra-HD ePTZ



PART NO.	
Video conference camera 4K ePTZ	VLCAM100
For more product info click here	



The Vivolink VLCAM100 is a high-definition ePTZ camera specifically designed for small meetings, classrooms and distance learning. It supports USB 3.0 and is plug-and-play with just one USB cable. Thanks to its built-in TV mount, it is easy to install on the TV or on the screen. With the 120° wide viewing angle and 4 time magnification, attendees appear clear. In addition, it has a built-in microphone and is an excellent choice and best suited for distance learning or video conferencing.

- Supports USB 3.0 / 2.0 plug & play
- With Auto Framing function
- 4K image sensor with 8.28 Megapixel
- Output resolution up to 3840 x 2160
- Panoramic 120° viewing angle
- 4x digital zoom
- ePTZ, Remote control
- Built-in microphone

Sensor	1/2.5" 8.28 MP CMOS
Video output	Main stream: 3840×2160@30fps 1920×1080P@30fps/25fps 1280×720P@30fps/25fps, etc. Sub-stream: 1280×720P@30fps/25fps 640×480P@30fps/25fps 320×172P@30fps/25fps
Auto framing function	Yes
View angle	126° (Diagonal), 120° (Horizontal)
Minimum object distance	50 cm
Remote control	Yes
Operation systems	Windows, MacOS™, Linux
Digital zoom	4x
Camera control interface	IR remote control / USB
Driver	UVC/UAC
ePTZ	Support
Preset positions	IR: 10 Sets USB: 255 sets
Video format	YUV / MJPEG / H.264 / H.265
Video output (HD) interface	USB 3.0 (USB 2.0 Compatible)
Microphone	Build in 2 microphones
White balance	Manual / Auto
Exposure control	Auto
Brightness control	Yes
Audio over USB3.0	Yes
Focus system	Fixed Focus
Noise reduction	2D & 3D DNR
Size	222mm×93.25mm×56.5mm
Weight	Main Unit : 0.53kg



BACK

USB 3.0



FRONT

L: 222mm

Organisers

Cable Velcro Ties

25 pack re-usable cable organiser



This nice cable organiser makes the overall impression of an installation look good and professional. Avoid cable clutter with re-usable velcro ties. Ties come in a 25 pcs. pack. Length 20cm, width 2.5cm

PART NO.	
Vivolink velcro tie in 25 pcs.	PROTIE
 For more product info click here	

Cable holders with adhesive tape

Kit with cable organiser bridges

- Colour: black
- Powerful adhesive tape
- Strong clip to secure the cables firmly in place
- Premium rubber touch



PART NO.	
Vivolink cable holders	VLCBKITB
 For more product info click here	



PROFIX Cable Tie

A reusable cable organiser




The PROFIX is the product that makes your professional AV installation neat and kept in place. Install the PROFIX in cabinets, on walls, under tables and over ceilings, etc. The cables are secured and fixed in place by a velcro band. The fix plate has a hole for an M5 flat-headed screw (screw not included).

PART NO.	
Vivolink velcro fix 1 pcs.	PROFIX
 For more product info click here	

Cable hook for wall

This product can be used as a cable hanger next to the screen. Two white screws are included in the package.

- Width 60mm
- Height 85mm



PART NO.	
Wall Cable Organiser white w/screws (hook)	VLCBLHOOK
 For more product info click here	

Media Player Mount

For installing AV equipment

Mount for installing and securing AV equipment on the wall behind a display or over ceilings. Can be used for all types of equipment, e.g. it secures the player and keeps it in place.

PART NO.	
Media player mount 32-46mm	VLMPM1
Media player mount 47-76mm	VLMPM2
 For more product info click here	

Camera or AV Shelf

Perfect for meeting rooms

Vivolink transparent or black acrylic shelves fit perfectly into meeting rooms or other places with AV equipment.

Small size shelves are typically for cameras.

Big size shelves are well suited for many different kinds of AV equipment. Shelves are produced in 8mm acrylic with holes for wall mounting.



PART NO.	
Media shelf 400x360mm Black	VLSHELF-L BLACK
 For more product info click here	



PART NO.	
Camera shelf 110x85mm Black	VLSHELF-CAM



PART NO.	
Camera shelf 290x205mm Black	VLSHELF-CAMPTZ



PART NO.	
Camera shelf 130x180mm Black	VLSHELF-S BLACK
Camera shelf 150x200mm Black	VLSHELF-M BLACK
 For more product info click here	



PART NO.	
Camera shelf 130x180mm Transparent	VLSHELF-S
Camera shelf 150x200mm Transparent	VLSHELF-M
 For more product info click here	

Accessories for installation


Desk Grommet

Vivolink VLDG Series – Desk Grommets for Cable Management
Keep your workspace clean and professional.

The VLDG series allows easy passthrough of HDMI, DisplayPort, USB-C, or RJ45 connectors via a discrete opening.

	PART NO.
Desk Grommet ø22mm aluminum - for table thickness up to 35mm	VLDG22
Desk Grommet ø22mm black - for table thickness up to 35mm	VLDG22-B
Desk Grommet ø22mm aluminum - for table thickness up to 55mm	VLDG22L
Desk Grommet ø22mm black - for table thickness up to 55mm	VLDG22L-B
Desk Grommet ø24mm black - for table thickness up to 55mm	VLDG24-B
Desk Grommet ø24mm black - for table thickness up to 55mm	VLDG24L-B

 For more product info [click here](#)

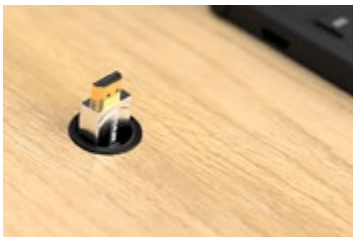

VLDG24-B mounted



Large Desk Grommet with Brush Insert


The Vivolink VLDG60 is a premium desk grommet designed for professional AV, office, and meeting room installations where multiple cables need to pass through a single, discreet opening.

With its larger diameter and integrated brush insert, the VLDG60 allows for smooth cable passthrough while preventing dust and visual clutter. The removable cover ensures easy access and a clean look when not in use.

- Suitable for high cable density (e.g. HDMI, DP, USB-C, RJ45, power cables)
- Integrated brush insert for dust control and neat appearance

	PART NO.
Desk Grommet ø60mm	VLDG60

 For more product info [click here](#)

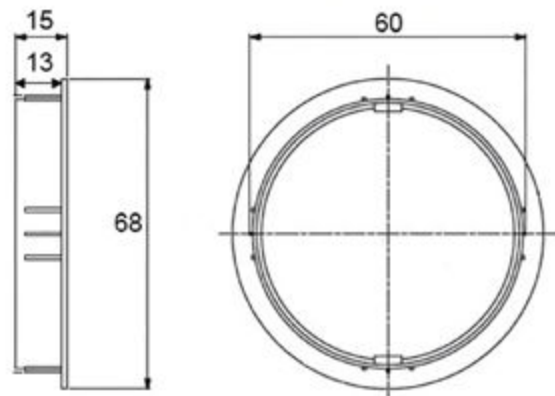




Organisers

Under desk cable organiser

- 6 x Velcro ties to fix power rail and adapters
- Dimension: 914mm x 305mm
- Weight support: 5kg
- 2 x metal brackets to securely fixation under desk
- Colour: black

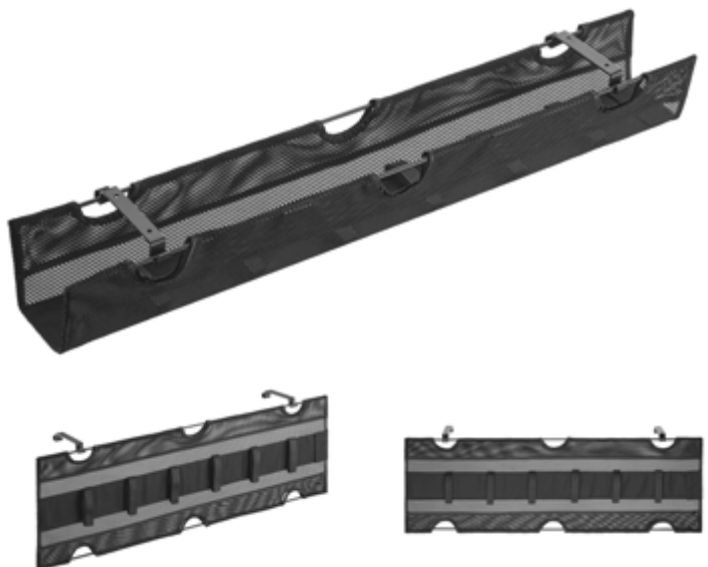

	PART NO.
Under Desk Cable organiser	VLUDCM914
	 For more product info click here

Expandable Cable Sleeves

Nice & tidy in a zip

Vivolink expandable cable sleeve is a flexible sleeve that can be stretched approximately 40%.

The benefit of the expandable cable sleeve is that the cables are kept tight together because the sleeve is stretched around the cables. This will give a nice straight appearance of the cables, like it was one single cable.

12mm BLACK	PART NO.
0.8m for the office desk ø12mm black	PROZIPSLEEVE1208
1.8m for the office desk ø12mm black	PROZIPSLEEVE1218
2.8m for small meeting room ø12mm black	PROZIPSLEEVE1228
4.8m for larger meeting room ø12mm black	PROZIPSLEEVE1248

20mm BLACK	PART NO.
0.8m for the office desk ø20mm black	PROZIPSLEEVE2008
1.8m for the office desk ø20mm black	PROZIPSLEEVE2018
2.8m for small meeting room ø20mm black	PROZIPSLEEVE2028
4.8m for larger meeting room ø20mm black	PROZIPSLEEVE2048

 For more product info [click here](#)



12mm WHITE	PART NO.
0.8m for the office desk ø12mm white	PROZIPSLEEVEW1208
1.8m for the office desk ø12mm white	PROZIPSLEEVEW1218
2.8m for small meeting room ø12mm white	PROZIPSLEEVEW1228
4.8m for larger meeting room ø12mm white	PROZIPSLEEVEW1248

 For more product info [click here](#)

20mm WHITE	PART NO.
0.8m for the office desk ø20mm white	PROZIPSLEEVEW2008
1.8m for the office desk ø20mm white	PROZIPSLEEVEW2018
2.8m for small meeting room ø20mm white	PROZIPSLEEVEW2028
4.8m for larger meeting room ø20mm white	PROZIPSLEEVEW2048

 For more product info [click here](#)



Premium cable management

With the Vivolink premium cable management it is easy to zip cables in and get a nice and tidy look in seconds. The materials used are best in class. Easy to install - easy to clean - easy to work with.

- Smart zipper for easy use
- 12mm can zip in 2-4 cables
- 20mm can zip in 5-6 cables
- Easy and safe to install
- Re-usable



BEFORE



AFTER

Cable Sleeves

Vivolink cable sleeves are made of a tight-braided polyester that hides the cables completely. The material is flame-retardant, halogen-free and is suited for operating temperatures from -50°C to +150°C.

Ideal and easy for organising several cables. The tough and durable material ensure maximum protection.

Tight-braided, self-closing sleeve

Comes in a 25 metre roll

Easy and flexible for organising and protecting cables. The tight-braiding hides the cables completely, and the braiding is actually so tight that you cannot see the cables through the fabric and gives an elegant appearance.

The sleeve can be cut to any length to match your needs. Cables can be easily added or removed from the braided sock.

- Keeps cables concealed and protects cables from wear and tear
- Cuttable Design
- Fits your specific needs or used end-to-end for precision cable coverage
- Flame-resistant material: reduces fire risk
- Tool-free assembly in minute
- Sleeve diameter: Ø10, Ø25, Ø38mm

	PART NO.
Flexible cable sleeve Ø10mm black 25m roll cutable tight-braided	VLSC102500B
Flexible cable sleeve Ø10mm white 25m roll cutable tight-braided	VLSC102500W
Flexible cable sleeve Ø25mm black 25m roll cutable tight-braided	VLSC252500
Flexible cable sleeve Ø25mm white 25m roll cutable tight-braided	VLSC252500W
Flexible cable sleeve Ø38mm black 25m roll cutable tight-braided	VLSC3825000B
Flexible cable sleeve Ø38mm white 25m roll cutable tight-braided	VLSC3825000W



For more product
info [click here](#)

Vivolink self-closing warp is a non-expandable sleeve woven from monofilament (weft) and multifilament (warp) polyester yarns. It provides a lightweight, cost-effective and tough solution for the protection of a wide range of components. The open design allows organising cables that are already connected. Cables are easily added or removed from the braided sleeve.



It is recommended to cut the sleeve with a hot knife.



White Cable Channel w/tape

	PART NO.
White cable channel with tape 2m HxW 10x12 mm	VLC1156250
White cable channel with tape 2m HxW 15x15 mm	VLC1156251
White cable channel with tape 2m HxW 20x19 mm 2m HxW 20x33 mm	VLC1156252
White cable channel with tape	VLC1156253



For more product
info [click here](#)



Projector Mount

Heavy-Duty Projector Ceiling Mount (for pitched or flat ceiling)

Load capacity: 35kg

Typical installations:

Auditoria, cantinas, large meeting rooms and hotels



- 360° rotating joint: for optimal viewing angles
- Swiveling joint: offers maximum viewing flexibility
- Tilting design: allows maximum viewing ability
- Adjustable length: for your different choices

- Ceiling plate can be fine-tune adjusted for easy repositioning
- Detachable head section: makes installation easier
- Adjustable support arms: fit most projectors with ease



Large Ceiling Mount

- Variable distance: 74.5cm-114.5cm
- Projector hole distance: 13cm-47cm
- **Maximum loading capacity: 35kg**



Medium Ceiling Mount

- Variable distance: 60.5cm-90.5cm
- Projector hole distance: 13cm-47cm
- **Maximum loading capacity: 35kg**



Small Ceiling Mount

- Fixed ceiling distance: 25.5cm
- Projector hole distance: 13cm-47cm
- **Maximum loading capacity: 35kg**

LARGE	PART NO.
Ceiling mount large 74.5-114.5cm black	VLMC350L-B
Ceiling mount large 74.5-114.5cm white	VLMC350L-W

SMALL	PART NO.
Ceiling mount small 25.5cm black	VLMC350S-B
Ceiling mount small 25.5cm white	VLMC350S-W

MEDIUM	PART NO.
Ceiling mount medium 60.5-90.5cm black	VLMC350M-B
Ceiling mount medium 60.5-90.5cm white	VLMC350M-W



For more product info [click here](#)

Fixed w/Tilt

Typical installations: Meeting rooms, restaurants, offices and hotels.

- Ultra-flexible mount plate to fit every demand
- Distance from ceiling: 15.5cm
- White aluminum for nice and discreet installation
- Maximum loading capacity: 15kgs

PART NO.	
Projector mount fixed	VLMC101-H
 For more product info click here	



Variable Slider

Adjustable height 45-55cm and supports tilt function for perfect distance fit to screen.

Typical installations: Meeting rooms, restaurants, offices and hotels.

- Ultra flexible mount plate to fit every demand
- Adjustable height from 45-55cm
- Bar tilt to fine adjust distance to screen
- White aluminum for nice and discreet installation
- **Maximum loading capacity: 15kgs**

PART NO.	
Projector mount variable slider	VLMC200
 For more product info click here	





Monitor Mounts

Ceiling Mount

50kg load capacity and VESA 600x400.

Typical installations: Public areas such as hotels, shopping malls, trade fairs, airports, etc.

- Typical screen size: 37" - 70"
- VESA size from 200x200 to 600x400
- Full motion system for flexible use
- Tilt option for perfect viewing angle
- **Maximum loading capacity: 50kgs**

	PART NO.
Length 560 to 910mm	VLMC3770S
Length 1060 to 1560mm	VLMC3770L



For more product info [click here](#)



VLMC3770L

VLMC3770S



Portable Signage Stand

Usage

The portable signage stand is very useful for venues like restaurants, lobby areas and museums. The stand is also very handy to use for a shop demo or at an exhibition stand.

- Foldable and portable design
- Perfect choice for a flexible installation
- Portrait or landscape viewing
- One solution fits any installation

Design

- Vertical and horizontal monitor mount
- VESA: 75x75, 100x100, 200x100, 200x200, 300x200, 300x300, 400x400
- **Weight capacity: 50kg**

PART NO.	
Portable signage stand	VLFS3267
 For more product info click here	

Wheels make it easy to move the stand around.



Flip Mobile Stand

VLFS3770 is capable of supporting 50kg weight, and it is designed to fit any 37"-70" curved or flat panel display.

Display can freely turn 90° for horizontal or vertical use.
Solid steel construction gives a professional feel and look.
Rear side has a lockable storage room for media player or small computer.

- Typical screen size 37"-70" (not limited to this)
- Supports VESA from 200 x 200 to 600 x 400
- Rotating mobile stand for interactive display
- Portrait or landscape viewing: one solution fits any installation
- 5° tilt angle: provides an ergonomic writing position
- Power strip storage design
- Equipment shelf: provides storage space for accessories
- Heavy-duty 10 cm (4") casters, with locking mechanism
- **Maximum loading capacity: 50kg**

	PART NO.
Flip mobile stand white	VLFS3770
	 For more product info click here



Lockable storage
for media player or
small computer



Mobile Monitor Stands

Large Mobile Stand

Great choice for educational purposes and video conference equipment. Mobile and flexible.

- Typical screen size 70"-120"
- VESA size from 200x200 to 1000x600
- Adjustable camera shelf position over or under screen
- Material aluminum alloy
- Heavy-duty 10 cm (4") casters, with locking mechanism
- **Maximum loading capacity: 140kg**

PART NO.	
Mobile stand 70"-120"	VLFS70120
 For more product info click here	



Medium Mobile Stand

Great choice for educational purposes and video conference equipment. Mobile and flexible.

- Camera shelf on top
- VESA size from 600x400
- Typical screen size 42"-90"
- Easy to assemble
- Free-tilting and swiveling design
- Locking rotary knob: ensures a secure position at any height and angle setting
- Heavy-duty casters with locking mechanism
- Heavy-duty 10 cm (4") casters, with locking mechanism
- **Maximum loading capacity: 35kg**



PART NO.	
Mobile stand 32"-65"	VLFS3266
Feet for VLFS3266C & VLFS3770	VLFSFEETM10
 For more product info click here	

High load and simple design

- Typical screen size 42"-90"
- VESA size from 200x200 to 800x600
- Steel tube
- Product size: 1050x550x1830mm
- Two shelves
- **Maximum loading capacity: 150kg**



PART NO.	
Mobile stand 42"-90"	VLFS4290
Extra lockable casters for VLFS4290	VLFS4290-EXTRA CASTERS
 For more product info click here	

Projector Cart

VLPS100 is an ideal solution for flexible use of projector

Free-tilting design makes it easy to adjust to the best angle.
Safety edge stoppers prevent devices from slipping.
Heavy-duty casters with locking mechanism.

It is very easy to assemble - as easy as 1-2-3.

- Top plate tilt +/-35°
- Adjustable height 85-110cm
- Shelf for PC and shelf for projector
- Easy assembly
- **Max load: 10kg**

	PART NO.
Projector cart white	VLPS100
	 For more product info click here



Steel Table Top Stand

The Vivolink VLMT400B is a sturdy and stylish steel table top stand, ideal for mounting flat panel displays on tables, cabinets, or AV furniture. Perfect for meeting rooms, reception areas, showrooms, or classrooms where wall mounting is not an option.

- Supports screen sizes from 23" to 75"
- Compatible with VESA up to 800x400
- Made of powder-coated steel for enhanced stability and durability
- Height-adjustable and tiltable for an optimal viewing angle Quick and easy installation with cable management support
- A smart and flexible alternative to traditional wall mounts.
- **Supports up to 40kg**

PART NO.	
Steel Table Top Stand	VLMT400B
 For more product info click here	



Decorative Covers
for a more elegant look



VESA Soundbar Mount


Mount a soundbar directly above or below the display with two metal arms of high quality steel.

This is the easiest and fastest way to install a soundbar and it ensures it is mounted perfectly and accurately below the display. No need for drilling holes in the wall and no need to spend extra time and money on installation.

You can mount the soundbar above or below the display.
Weight capacity is 15 kg.

- Fits 32" to 70" displays
- Fast and accurate installation
- Extra strong and durable installation
- **Weight support: 15 kg**

	PART NO.
Soundbar mount for 32"-70" displays	VLMSB3270
	 For more product info click here

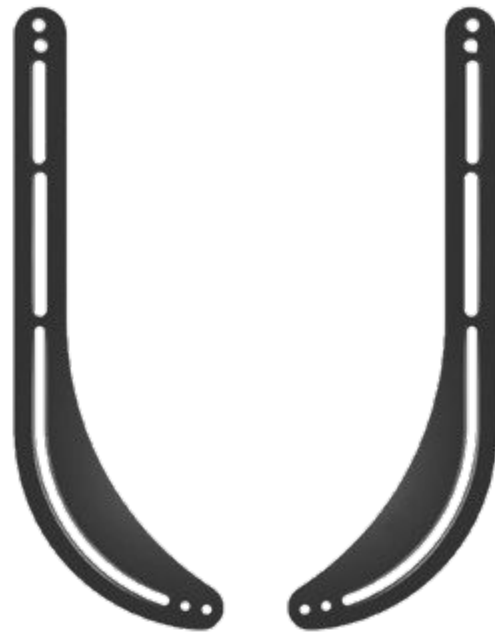

TV-Mounted Flexible Universal Soundbar or Camera Mount


Mount a Soundbar/Camera directly above or below the display with two metal arms of high quality steel.

The Vivolink VLMSBSHELF is a sleek, universal bracket designed to mount directly to your TV, delivering a clean, integrated audio setup without drilling into walls.

Compatible with most soundbars and TVs, it supports up to 10 kg and adjusts to hole patterns up to 700 mm.

- Universal fit — works with most soundbars and TVs
- Sturdy & stylish — holds up to 10 kg with a modern black finish
- Moves with your TV — tilt and swivel in sync for optimal sound
- **Weight support: 10 kg**

	PART NO.
TV-Mounted Flexible Universal Soundbar Mount	VLMSBSHELF
 For more product info click here	

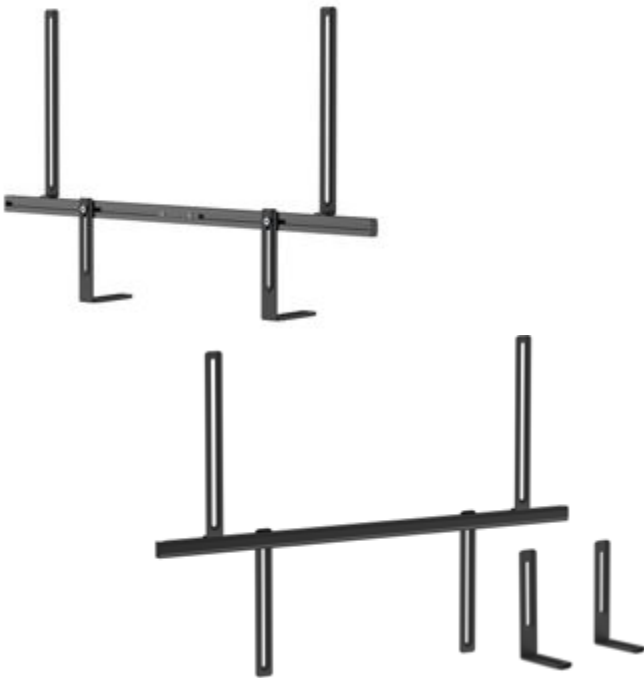

Medium Wall Mount w/Tilt

Typical installations:

Public areas like in hotels, shopping malls, at trade fairs, etc.

- Typical screen size: 23" - 55"
- VESA size from 200x200 to 400x400
- Tilt function +/-15 degrees
- With anti-theft security locking bar
- **Maximum loading capacity: 50kgs**

PART NO.	
Monitor mount	VLMW2355T
 For more product info click here	



Medium Wall Mount w/Arm

Typical installations:

Meeting rooms, restaurants, offices, hotels, or living rooms.

- Typical screen size: 23" - 55"
- VESA size from 200x200 to 400x400
- Slim full-motion wall mount with triple arm and large wall plate
- **Maximum loading capacity: 35kgs**

PART NO.	
Monitor mount	VLMW2355A
 For more product info click here	

Small Wall Mount

Typical installations:

Meeting rooms, restaurants, offices, hotels, or living rooms.

- Typical screen size: 13" - 37"
- VESA size from 50x50 to 200x200
- **Maximum loading capacity: 35kgs**

PART NO.	
Monitor mount	VLMW1337
 For more product info click here	



VIVO LINK®

PROFESSIONAL AV SOLUTIONS

Frame Wall Mount w/snap lock

Easy installation

XX-Large

- Typical screen size: 37"-140"
- Ultra-slim profile (only 32 mm from the wall)
- Split design for easier shipping, handling, and installation
- VESA size: 300x200, 600x400, 900x600, 1200x800
- A rock-solid solution for secure, discreet wall mounting of XL signage displays.
- **Maximum loading capacity: 125kg**



PART NO.	
Wall mount slim XXL 125kg	VLMW37140
For more product info click here	

X-Large

- Typical screen size: 60" - 100"
- For curved and flat screens
- VESA size: 200x200, 300x300, 400x200, 400x400, 600x400, 800x400, 800x600, 900x600
- Smart locking system for easy installation
- **Maximum loading capacity: 125kg**



PART NO.	
Wall mount slim XL 125kg	VLMW60100
For more product info click here	

Large

- Typical screen size: 37" - 70"
- For curved and flat screens
- VESA size: 200x200, 300x300, 400x200, 400x400, 600x400
- Smart locking system for easy installation
- **Maximum loading capacity: 50kg**



PART NO.	
Wall mount slim L 50kg	VLMW3770
For more product info click here	

Medium

- Typical screen size: 32" - 55"
- For curved and flat screens
- VESA size: 200x200, 300x300, 400x200, 400x400
- Smart locking system for easy installation
- **Maximum loading capacity: 50kg**



PART NO.	
Wall mount slim M 50kg	VLMW3255
For more product info click here	



Large Wall Mount

Typical installations:

Public areas like in hotels, shopping malls, at trade fairs, etc.

- Typical screen size: 42"-80"
- VESA size from 200x200 to 800x400
- Smart locking system for easy installation
- Tilt option for easy connection of all wires
- Slide mounting holes for horizontal level adjustment during the installation
- Slim design with only 23mm from wall to back of monitor
- **Maximum loading capacity: 80kgs**



PART NO.	
Monitor mount	VLMW4280
 For more product info click here	



Large Wall Mount w/Tilt

Typical installations:

Public areas like in hotels, shopping malls, at trade fairs, etc.

- Typical screen size: 40"-65"
- VESA size from 200x200 to 600x400
- Tilt function +/-15 degrees
- Slim mount 5cm from wall
- Self-balanced angle adjustment system
- **Maximum loading capacity: 65kgs**

PART NO.	
Monitor mount	VLMW4065T
 For more product info click here	

Medium Wall Mount

Typical installations:

Public areas like in hotels, shopping malls, at trade fairs, etc.

- Typical screen size: 23"-55"
- VESA size from 200x200 to 400x400
- With anti-theft security locking bar
- Slim design with only 22mm from wall to back of monitor
- **Maximum loading capacity: 50kgs**



PART NO.	
Monitor mount	VLMW2355
 For more product info click here	

Vertical Display Mount

This wall mount is for large displays mounted in portrait position.

Typical installation:

Signage screens in shopping malls or airports. The mount has a lock hole for a padlock so the screen cannot be removed. The padlock is not included in the package.

- Typical screen size: 60" - 100"
- VESA size: 200x200 - 400x600
- Smart locking system for easy installation
- **Maximum loading capacity: 75kg**

	PART NO.
Portrait Wall Mount up to VESA 400x600	VLMW3775P
 For more product info click here	



Premium wall mount with arm

Display wall mount in solid construction produced in aluminum with high gloss black design.

Typical installations:

Meeting rooms, restaurants, offices, hotels, or living rooms.

- Premium aluminum wall mount for screen size 43"-90"
- VESA size: 200x200 - 800x400
- High gloss black with copper bushing for moving smoothly
- Cable management
- **Maximum loading capacity: 70kg**

	PART NO.
Wall mount large w. arm up to VESA 800x400	VLMW4390A
	For more product info click here






Large wall mount with arm

Large display wall mount in solid construction

Typical installations:

Meeting rooms, restaurants, offices, hotels, or living rooms.

- Typical screen size 43"-100"
- VESA size: 200x200 - 800x400
- Tilt range +/- 5 degrees
- Swivel range +/- 60 degrees
- Cable management
- **Maximum loading capacity: 120kg**



PART NO.	
Wall mount large w. arm up to VESA 800x400	VLMW60120A
 For more product info click here	

Medium wall mount with arm

Medium display wall mount in solid construction produced in aluminum with high gloss black design

Typical installations:

Meeting rooms, restaurants, offices, hotels, or living rooms.

- Typical screen size 37"-80"
- VESA size: 200x200 - 600x400
- Tilt range +5 to -10 degrees
- Screen level +/- 2 degrees
- Swivel range +/- 90 degrees
- Cable management
- **Maximum loading capacity: 50kg**



PART NO.	
Wall mount large w. arm up to VESA 800x400	VLMW3780A
 For more product info click here	


Vivolink FlexiLift Series – Manual Lift System for Large Touch Displays

The Vivolink FlexiLift Series is a smart, manually adjustable lift system designed to deliver ergonomic comfort and flexibility in modern educational, corporate, and public environments. With robust construction and smooth manual height adjustment, FlexiLift is ideal for interactive touchscreens and heavy displays.

VLMW-FLEXI-M – FlexiLift Wall Mount (35–65 kg)

Designed for displays weighing between 35–65 kg, this mount is ideal for screens ranging from 55" to 86" (weight is the primary compatibility factor).

- Manual height adjustment (400 mm range)
- Ideal for schools, conference rooms, museums, and office spaces
- Compact design – hides neatly behind the screen
- Easy installation with no special tools required
- Strong and stable construction for heavy-duty use
- Up to VESA 800 x 600

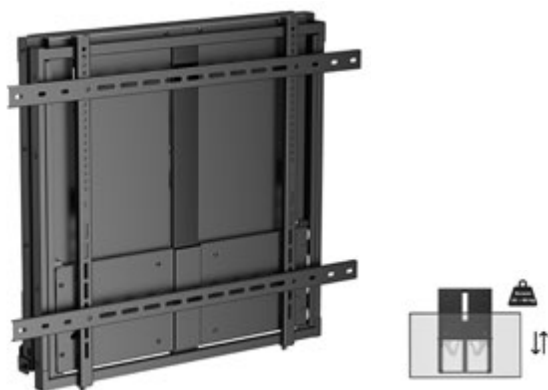

PART NO.	
FlexiLift Wall Mount 35-65 kg.	VLMW-FLEXI-M
FlexiLift Wall Mount 60-90 kg.	VLMW-FLEXI-L
Wall Base Stand for Vivolink FlexiLift	VLMW-FLEXI-BASE
Mobile Base Stand for Vivolink FlexiLift w/4" casters	VLFS-FLEXI



For more product info [click here](#)

VLMW-FLEXI-L – FlexiLift Wall Mount (60–90 kg)

A more powerful version of the FlexiLift mount for heavier screens (60–90 kg). Ideal for screens ranging from 60" to 100" (weight is the primary compatibility factor).

- Suitable for larger interactive panels and commercial displays
- Shares the same smart design and 400 mm manual height adjustment
- Especially relevant for large-format displays in auditoriums and high-traffic areas
- Up to VESA 800 x 600



Accessories

VLMW-FLEXI-BASE – Wall to Floor Base Stand

An add-on support for FlexiLift wall mounts, used when mounting on weaker walls such as plaster or drywall.

- Transfers load from wall to floor
- Maintains stability and safety
- Simple to install – no specialized tools needed



VLFS-FLEXI – Mobile Base Stand with 4" Casters

A mobile stand compatible with VLMW-FLEXI-M and VLMW-FLEXI-L, offering maximum flexibility.

- 4" heavy-duty casters for smooth movement across rooms and thresholds
- Optional front cover panels included for a cleaner look
- Includes storage box with cable pass-throughs – can be top- or bottom-mounted
- Built-in cable management for a tidy setup
- Ideal for shared learning spaces or mobile AV installations





VIVOLINK®

PROFESSIONAL AV SOLUTIONS

AUSTRIA

Energiestrasse 2,
2540 Bad Vöslau,
+43 (0) 2236 374 014,
info@eet.at

BELGIUM

Koeweideblock 4 D3,
1785 Merchtem,
+32 2 225 225,
info@eetgroup.be

CROATIA

Bregnerødvej 133 D,
3460 Birkerød,
+385 1 7757 393,
info@eetgroup.hr

CZECH REPUBLIC

Ve Žlábku 2402/77A,
193 00 Praha 9,
+42 0226259750,
obchod@eetgroup.cz

DENMARK

Bregnerødvej 133 D,
3460 Birkerød,
+45 45 82 19 19,
info@eet.dk

ESTONIA

Bregnerødvej 133 D,
3460 Birkerød,
+372 6 346 160,
info@eetgroup.ee

FINLAND

Spektri Business Park, 02130
Espoo,
09-47 850 900,
sales@eet.fi

FRANCE

38 rue Mozart,
92110 Clichy,
33 (0)1 41 27 21 00,
info@eet.fr

GERMANY

Elisabeth-Selbert-Straße 5a,
40764 Langenfeld,
02173 / 200 41 0,
info@eet.de

HUNGARY

Bregnerødvej 133 D,
3460 Birkerød,
+36 1 445 36 27,
info@eetgroup.hu

IRELAND

Balheary Demense,
Balheary Road, Swords, K67
E5AO Co. Dublin,
00353 1 4509 544,
info@eet.ie

ITALY

Sede Via Carroccio 6,
20123 Milano,
+39 02 49 82 756,
info@eet.it

LATVIA

Bregnerødvej 133 D,
3460 Birkerød,
+371 67 88 12 58,
info@eetgroup.lv

LITHUANIA

Bregnerødvej 133 D,
3460 Birkerød,
+370 34 330 707,
info@eetgroup.lt

NETHERLANDS

Proostwetering 107 D,
3543 AC Utrecht,
030-2192040,
info@eetgroup.nl

NORWAY

Olaf Helsets vei 6,
0694 Oslo,
+47 22 91 95 00,
salg@eet.no

POLAND

ul. Rakietowa 22,
80-298 Gdansk,
+48 583200660,
info@eet.pl

PORTUGAL

Rua do Progresso 11-12, 3800-
639 Aveiro,
+351 234 301 900,
sales@eet.pt

ROMANIA

Bregnerødvej 133 D,
3460 Birkerød,
+40 312 294 520,
info@eetgroup.ro

SPAIN

Calle Aragoneses 15,
28108 Alcobendas, 902902377,
ventas@eet.es

SWEDEN

Cylindervägen 20,
vån 7 Box 4124,
131 04 Nacka,
+46 8 507 510 00,
kundservice@eet.se

SWITZERLAND

Bösch 108,
6331 Hünenberg,
+41 41 785 13 13,
sales@eetgroup.ch

UNITED KINGDOM

30 Riverside Way,
UB8 2YF Uxbridge,
0333 241 9 251,
info@eet.co.uk

OPREMA


Unit 11 & 12 Eastgate Business
Park, Wentloog Avenue,
Cardiff CF3 2EY,
United Kingdom,
+44 29 2064 1509,
sales@oprema.co.uk

EET RETAIL

Bregnerødvej 133 D,
3460 Birkerød,
Denmark,
info@eetretail.com

Scan the QR-code to get
in touch with Vivolink

Vivolink.net



EET is not responsible for any typographical errors in this catalogue. All products included in the catalogue are subject to availability. EET reserves the right to alter product offerings and specifications at any time, without notice.

All trademarks or registered trademarks used in this publication are the properties of their respective owners and are used here for purposes of identification only.

Some products may not be available in your country.



Product Catalogue Vivolink 2026
[CAT-VIVOLINK-2026]

